This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

+ *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
+ *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
+ *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
+ *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at `http://books.google.com/`

WEALE'S SCIENTIFIC & TECHNICAL SERIES.

CIVIL ENGINEERING & SURVEYING.

Civil Engineering. H. LAW & D. K. CLARK . . 6/6
Pioneer Engineering. E. DOBSON 4/6
Iron Bridges of Moderate Span. H. W. PENDRED . 2/-
Iron and Steel Bridges & Viaducts. F. CAMPIN . 3/6
Constructional Steel & Ironwork. F. CAMPIN . . 3/6
Tubular & Girder Bridges. G. D. DEMPSEY . . 2/-
Materials and Construction. F. CAMPIN . . . 3/-
Sanitary Work. C. SLAGG 3/-
Roads & Streets. LAW, CLARK, & WALLIS-TAYLER . 6/-
Construction of Gasworks. S. HUGHES & W. RICHARDS 5/6
Water Works. S. HUGHES 4/-
2/-
4/6
1/6
1/6
1/6
2/-
3/6
2/-
3/6
2/-
Boilermaker's Ready Reckoner. J. COURTNEY . 4/-
Boilermaker's Ready Reckoner and Assistant . . 7/-
Steam Boilers. R. ARMSTRONG 1/6
Steam and Machinery Management. M. P. BALE . 2/6
Steam and the Steam Engine. D. K. CLARK . . 3/6
Steam Engine, Theory of. T. BAKER . . . 1/6
Steam Engine. Dr. LARDNER 1/6
Locomotive Engines. G. D. DEMPSEY & D. K. CLARK . 3/-
Locomotive Engine Driving. M. REYNOLDS . . 3/6
Stationary Engine Driving. M. REYNOLDS . . 3/6
Model Locomotive Engineer. M. REYNOLDS . . 3/6
Modern Workshop Practice. J. G. WINTON . . 3/6
Mechanical Engineering. F. CAMPIN 2/6
Details of Machine [illegible] . 3/-
Elementary Marin[illegible]R . 1/6

CROSBY LOCKWOOD [illegible] ourt, E.C.

Library
of the
University of Wisconsin

WEALE'S SCIENTIFIC & TECHNICAL SERIES.

MECHANICAL ENGINEERING, &c.—*contd.*

Sewing Machinery. J. W. URQUHART	2/-
Power of Water. J. GLYNN	2/-
Power in Motion. J. ARMOUR	2/-
Iron and Heat. J. ARMOUR	2/6
Mechanism and Machines. T. BAKER & J. NASMYTH	2/6
Mechanics. C. TOMLINSON	1/6
Cranes and Machinery. J. GLYNN	1/6
Smithy and Forge. W. J. E. CRANE	2/6
Sheet-Metal Worker's Guide. W. J. E. CRANE	1/6

MINING & METALLURGY.

Mineralogy. A. RAMSAY	3/6
Coal Mining. Sir W. W. SMYTH & T. F. BROWN	3/6
Metallurgy of Iron. H. BAUERMAN	5/-
Mineral Surveyor's Guide. W. LINTERN	3/6
Slate and Slate Quarrying. D. C. DAVIES	3/-
Mining and Quarrying. J. H. COLLINS	1/6
Subterraneous Surveying. T. FENWICK & T. BAKER	2/6
Mining Tools. W. MORGANS	2/6
Plates to ditto. 4to.	4/6
Physical Geology. PORTLOCK & TATE	2/-
Historical Geology. R. TATE	2/6
The above 2 vols., bound together	4/6
Electro-Metallurgy. A. WATT	3/6

NAVIGATION, SHIPBUILDING, &c.

Navigation. J. GREENWOOD & W. H. ROSSER	2/6
Practical Navigation. GREENWOOD, ROSSER & LAW	7/-
Navigation and Nautical Astronomy. J. R. YOUNG	2/6
Mathematical & Nautical Tables. LAW & YOUNG	4/-
Masting and Rigging. R. KIPPING	2/-
Sails and Sailmaking. R. KIPPING	2/6
Marine Engines. R. MURRAY & G. CARLISLE	4/6
Naval Architecture. J. PEAKE	3/6
Ships, Construction of. H. A. SOMMERFELDT	1/6
Plates to ditto, 4to	7/6
Ships and Boats. W. BLAND	1/6

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, E.C.

WEALE'S SCIENTIFIC & TECHNICAL SERIES.

AGRICULTURE & GARDENING.

Fertilisers & Feeding Stuffs. Dr. B. Dyer	1/-
Draining and Embanking. Prof. J. Scott	1/6
Irrigation and Water Supply. Prof. J. Scott	1/6
Farm Roads, Fences, and Gates. Prof. J. Scott	1/6
Farm Buildings. Prof. J. Scott	2/-
Barn Implements and Machines. Prof. J. Scott	2/-
Field Implements and Machines. Prof. J. Scott	2/-
Agricultural Surveying. Prof. J. Scott	1/6
The above 7 vols., bound together	12/-
Farm Management. R. S. Burn	2/6
Landed Estates Management. R. S. Burn	2/6
Farming—Soils, Manures, and Crops. R. S. Burn	2/-
Farming—Outlines—Farming Economy. R. S. Burn	3/-
Farming—Cattle, Sheep, and Horses. R. S. Burn	2/6
Farming—Dairy, Pigs, and Poultry. R. S. Burn	2/-
Farming—Sewage & Irrigation. R. S. Burn	2/6
The above 5 vols., bound together	12/-
Book-keeping for Farmers. J. M. Woodman	2/6
Ready Reckoner for Land. A. Arman	2/-
Miller's & Farmer's Ready Reckoner	2/-
Hay and Straw Measurer. J. Steele	2/-
Meat Production. J. Ewart	2/6
The Sheep. W. C. Spooner	3/6
Multum-in-Parvo Gardening. S. Wood	1/-
Forcing Garden. S. Wood	3/6
Market and Kitchen Gardening. C. W. Shaw	3/-
Kitchen Gardening. G. M. F. Glenny	1/6
Cottage Gardening. E. Hobday	1/6
Garden Receipts. C. W. Quin	1/6
Potatoes: How to Grow. J. Pink	2/-
Culture of Fruit Trees. M. Du Breuil	3/6
Tree Planter & Plant Propagator. S. Wood	2/-
Tree Pruner. S. Wood	1/6
Tree Planter, Propagator, & Pruner. S. Wood	3/6
Grafting and Budding. C. Baltet	2/6
Bees for Pleasure & Profit. G. G. Samson	1/-

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, E.C.

THE

WORKMAN'S MANUAL

OF

ENGINEERING DRAWING.

THE

WORKMAN'S MANUAL

OF

ENGINEERING DRAWING

BY

JOHN MAXTON, ENGINEER

INSTRUCTOR IN ENGINEERING DRAWING, ROYAL NAVAL COLLEGE, GREENWICH; FORMERLY OF R.S.N.A. SOUTH KENSINGTON, UNIVERSITY COLLEGE, ETC.

WITH NEARLY THREE HUNDRED AND FIFTY WOODCUTS AND SEVEN PLATES

Seventh Edition

LONDON

CROSBY LOCKWOOD AND SON

7, STATIONERS' HALL COURT, LUDGATE HILL

1891

6098945

71944
JUL 13 1903
SC
.M45

PREFACE.

THE object of the present book is to enable the working engineer to instruct himself in an important branch of his business. Although especially designed for this purpose, the latter part will be found useful to the general student; while it is hoped that to the master, who is already familiar with the subject, it may be found convenient as a book of reference.

ENFIELD ROAD NORTH,
LONDON, *June*, 1880.

CONTENTS.

CHAP.		PAGE
I.	Drawing Office and Furnishings	1
II.	Boards	2
III.	Squares	6
IV.	Instruments, Moulds, &c.	9
V.	Scales	17
VI.	Colours, Inks, Palettes, Brushes	19
VII.	Drawing and Tracing Papers	22
VIII.	Preparation for Drawing on Boards	23
IX.	" " Stretcher	29
X.	Commencing a Drawing	31
XI.	Hints on Geometry	33
XII.	Drawing from a Copy	68
XIII.	" Models and Large Machinery	75
XIV.	Inking-in a Drawing	130
XV.	Projection of Shadows	138
XVI.	Shading and Colouring	205
XVII.	Printing and Border Lines	222
XVIII.	Delineation of Screw Propeller Slip and Path	226
XIX.	" Paddle Wheel " "	228
XX.	Tracing	230
XXI.	Drawings for Engravings and Photographs	232
XXII.	" Lectures	234
XXIII.	Cutting off a Drawing	236
XXIV.	Sundry Notes	237

APPENDIX.

PART.		
I.	Architectural Orders in Engineering	241
II.	To describe a Volute	242
III.	Explanation of a Ship Design	244
IV.	Detail Drawings of Steam Ships	250
V.	Perspective Drawing	257
VI.	Isometrical "	260
VII.	Sizing, Varnishing, Framing, &c.	262

INDEX 265

ENGINEERING DRAWING.

CHAPTER I.

DRAWING OFFICE AND FURNISHINGS.*

It is essential that a room for drawing in should be free from damp; and, in selecting an apartment, it should be as high in the building as possible,† as it is not only more likely to be dry, but there would be less probability of the light being obstructed. A western aspect is the most suitable.

Window Blinds.—Venetian or calico blinds are necessary, as, on a clear day, the light should be slightly subdued.

Drawing Table.—The height of the table should be at back about 3 feet 8 inches, and at front (which should be rounded over on the top edge) 3 feet 6 inches, on a breadth of 2 feet 6 inches. The back of the table should be close, and parallel to, the window. Trestles may be used, and they should be so made as to shift to any height required.‡

* Although most persons have to accommodate themselves largely to circumstances, it is desirable to state what are the requisites of a room best suited for drawing in, so that they may, as far as possible be obtained.

† Except next a skylight, light through which, overhead, is unsuitable.

‡ Common trestles cost about 15*s.* per pair, shifting ditto, 25*s.* The prices here given are the ordinary shop prices, though in these and some other articles which follow, the intelligent workman may effect a saving by making his own.

41

Gas Fittings.—The vertical distance of the light from the drawing table should be about 2 feet, and the tube—in one or more joints—so arranged as to admit of the light being moved horizontally, or raised or lowered to any suitable position. The socket for the burner should be inclined outwards at an angle of 45° from the vertical, so that, when the burner is in its place, and the gas lit, it would throw the light down upon the paper.*

Sundries.—A drawing-office, or a room adjoining it, should also contain the following:—A duster, a wash-hand basin, soap,† towel, and a supply of water.

CHAPTER II.

MATERIALS.

DRAWING BOARDS.

THE first requisite for the mechanical draughtsman is a drawing board of suitable dimensions. The two most useful sizes are those for whole and half-sheets of double elephant drawing paper. The board should be fully half an inch each way larger than the paper, as the latter would not adhere properly where the gum or glue is applied unless the edge is within the board.

Drawing boards are generally made either of mahogany or of fir. The latter is commonly used, on account of its being the cheapest; but the best drawing boards are made from old mahogany tables or shop counters, such wood having become well seasoned, and therefore less liable to warp. The French polish is planed off, so as to prevent staining the paper.

* Under the most favourable circumstances it is more difficult to draw or colour by artificial than by daylight.

† It being quite essential to have the hands clean. The basin is also more convenient than an ordinary tumbler for the use of the sponge as well as for washing out palettes.

A section of a form of board more in favour in former times than now is shown in Fig. 1. This form is good in so



Fig. 1.

far as it saves the trouble of gumming down the paper at the edge, but is expensive.

In the above sections *a b* represents the paper, which, when damped, is placed on the lower board *c*; the frame *d*, which fits closely all round the edge of the lower board, is then squeezed down over the paper as shown at *f*, and secured by the fastenings *e e*.

The price of a board of this description for a whole sheet of double elephant would be—

Of mahogany . .	3 ft.	6 in.	×	2 ft.	6 in.	×	$\frac{3}{4}$ in.	25*s*.
,, half-sheet	2	6	×	1	9	×	$\frac{11}{16}$	15*s*.
,, smaller size	1	10	×	1	6	×	$\frac{5}{8}$	7*s*.

Of fir, whole sheet size	12*s*.
,, half-sheet size	8*s*. 6*d*.

The price of an ordinary well-seasoned plain board for a whole sheet of double elephant would be—

Of mahogany	18*s*.
,, half-sheet size	13*s*.
Of fir, whole sheet size	7*s*.
,, half ,, ...	4*s*. 6*d*.

Ordinary drawing boards are made in a variety of ways to prevent warping, of which the following are specimens :—

Fig. 2 represents a common method of finishing the ends of mahogany boards, the corners being mitred and tongued.



Fig. 2.



Fig. 3.

In Fig. 3 the end piece is put on with a tongue, as at *a*, worked out of the solid wood, or with a feather or tongue let in as at *b*.

In Fig. 4 the end piece is mortised on.



Fig. 4.



Fig. 5.

In Fig. 5 a strip of oak is fitted into a groove. This plan is very good for small fir boards.

When those of Figs. 3 and 4 are of fir, however well seasoned, they are apt to contract a little with heat, and the extremities of the end pieces are certain to project, and, if not planed off, cause the lines by a T-square to be untrue, as shown at Fig. 6. Fir boards are more easily acted on by the weather than those of mahogany.



Fig. 6.

If no cross ends are put on, two bars across the back, as at Fig. 7, would prevent the board bending. In this case



Fig. 7.

only one side of the board can be used; a disadvantage, as it is sometimes convenient to have a sheet of paper on each side at the same time (the one not in immediate use being covered over to prevent its being soiled). These bars are more applicable to small-sized boards. A large-sized fir board is better without cross ends, but having cross bars to prevent its warping, in which case some provision is necessary to allow it to expand and contract by the weather without damaging the board. The best of these are made with a series of grooves in the back about 2 inches apart, $\frac{1}{8}$th of an inch wide, and cut half-way through the thickness, as shown at



Fig 8.

Fig. 9.

a, Figs. 8 and 9. The bars *b* at each end of the board on the back, Fig. 8, being secured by a screw nail *f*, passing through the bar and nearly through the board, in the centre of it; the wood being allowed to expand or contract on each side by other screws sliding in little brass slots as at *c*, Fig. 8, of which Fig. 10 is a full-sized view, and Fig. 11 the corresponding section. A narrow strip of hard wood, generally ebony, is inserted along one side and one end of the board, a little from the edge, as at *d e*, Fig. 9, to allow the square to slide more easily. This is the most approved modern fir board,* and when of a size for a whole sheet of double elephant paper costs about 12*s*. 6*d*., and for half-sheet size about 8*s*. It is almost needless to add that all drawing boards should have the sides and ends perfectly square to each other. A good test of this is obtained by measuring across the board by the *cape and corner* method, in the direction of the dotted lines, (Fig. 12). When correct, the length *a b* is equal to the length *c d*.



Fig. 10.



Fig. 11.



Fig. 12.

CHAPTER III.

SQUARES.

Drawing, or T-squares, so called from their resemblance in shape to that letter, are of various sorts. They are gene-

* Its only disadvantage is that it is impossible, as in the previous example given, to have a sheet of paper on both sides.

rally made of mahogany, pear tree, or ebony. The common sort is that represented in Fig. 13. It has an immovable stock *a*, and a blade *b*, mortised into it. The blade should be as long as the longest side of the drawing board. If for a whole sheet of double elephant, the length should be 3 feet 6 inches, the breadth $2\frac{1}{2}$ inches, and the thickness $\frac{3}{32}$ of an inch. The stock should be 1 foot long, $2\frac{1}{2}$ inches broad, and $\frac{11}{16}$ inch thick.



Fig. 13.

The price of such square of mahogany would be 3*s*. 6*d*.
" " pear tree " 4*s*. 6*d*.

A smaller size for half-sheet double elephant will, for most purposes, be found more convenient. The size should be: blade 2 feet 6 inches long, breadth 2 inches, thickness $\frac{3}{32}$ inch; and the stock 10 inches long, breadth 2 inches, and the thickness $\frac{1}{2}$ inch.

The price of such square of mahogany would be 2*s*.
" " pear tree " 3*s*. 6*d*.

Squares having the stock projecting only on one side, Fig. 14, are suitable for working on a fixed straight-edge, as,


Fig. 14.



Fig. 15.

in making large illustrative drawings for lectures on paper

fixed on a wall, the blade of the square lies close to the paper, a necessity for drawing a straight line correctly.

A square having a movable stock, shown at *a*, Fig. 15, is useful for drawing a series of lines at an angle to the side of the board and parallel to each other.

The price, fitted with screw pin and nut, of the larger size, in mahogany, would be about .	5*s*. 6*d*.
Ditto, pear tree	7*s*.
Ditto, ebony	11*s*. 6*d*.
Smaller size, in mahogany	4*s*.
,, pear tree	5*s*.

They are frequently made with a tongue projecting from the stock, as at *b*, Fig. 16, which keeps the blade more flat to the board. It is generally of ebony, let into the stock. This kind is a little more expensive than those already described.



Fig. 16.

Others have the blade broader towards the stock, as in Fig. 17. This shape admits of the blade being kept steadier to the board, but only one side of it can be used for drawing lines square to the board, whereas, if an accident should occur to one edge of a parallel blade, the other edge can be made use of.

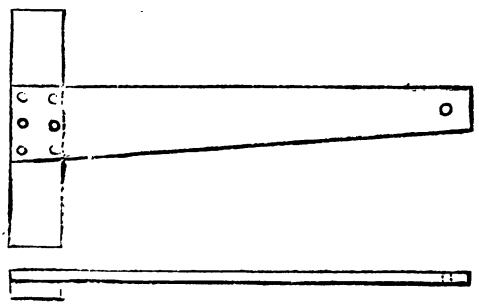
Fig. 17.

Blades, such as in Fig. 17, are simply put on above the stock, without either dovetails or mortises, the additional breadth affording ample room for a sufficient number of screw nails to render it secure. This square also allows the little set squares to be used beyond the edge of the drawing board if necessary.

The price of such square, if of pear tree (ebony edged), with 3 feet 6 inches blade, is about . 7*s*. 6*d*.
And of a 2 feet 6 inches blade . . . . . 5*s*. 6*d*.

It is much better to have the edge of the blade as shown at *a*, Fig. 18, than to have it bevelled, as they frequently are, as shown at *b*, as, in the latter case, in making dotted lines the pen is apt to get overlifted.

Fig. 18.

Every square should have a $\frac{3}{8}$ inch hole near the outer end of the blade to hang it up by, being the best way to preserve a T-square in its integrity.

A square is usually tested by first drawing a line with it on any plane surface having a straight side against which to bear the stock of square during the operation, and then turning it upside down and observing if the same edge of blade still coincides with the line, the stock bearing as before. If it has a shifting stock, care must be taken that the shifting edge is screwed up firmly, flush with the fixed part.

Pear-tree squares are preferable to those of mahogany, being less liable to warp, the material being thin, though mahogany has always a cleaner appearance than those of the lighter woods when frequently used.

CHAPTER IV.

DRAWING INSTRUMENTS, MOULDS, ETC.

It is a common error to suppose that any sort of instruments will suit a beginner. On the contrary he ought, in fairness

to himself, to have the very best he can procure. Instruments of the proper quality can be purchased separately; or very good second-hand sets, containing most of the necessary instruments, can be had for 30*s*. A new set in a box containing everything for ordinary use costs from £3 10*s*. to £4. First-class boxes of instruments frequently have duplicates of many of those contained in an ordinary set, with scales, moulds for curves, sets of colours, palettes, beam compasses, having pencil and ink feet for sliding on a straight edge for drawing large circles, or round telescopic metal bar for the same purpose (the price of a single instrument of the latter description, plain, with 3 feet metal tube, ranges from £1 5*s*. to £2 10*s*.), such sets run up in price to £15, or even more. When such boxes cannot be afforded, a set for ordinary engineering drawing must at least contain the following instruments. Compasses, pencil and ink legs with lengthening bar, pencil and ink bows, drawing pen, file and knife, little screw keys, parallel rulers, drawing pins, and scales.

Compasses, &c.—The most useful being those having jointed legs, one being removable, and with pencil and ink legs to fit in for drawing ordinary sized circles, and with a lengthening bar for large circles. The price of which set, if of brass, including file with knife end, is about 13*s*. 6*d*., of electrum 18*s*. to 21*s*.

Pencil and Ink Compasses (or bows) for the smaller circles, having a joint in each leg, so that in drawing a circle the lower parts may be as vertical as possible (for reasons explained in Chapter X.). Price of each instrument, plain, of brass, 2*s*. 6*d*. to 3*s*., if of electrum, 4*s*. and 5*s*. Some bows are fitted with a needle point projecting from a small shoulder or flat point, these when used on a mahogany board never make a hole in the paper larger than a needle would, even when inserted up to the shoulder: but with a fir board, in drawing many circles from the same centre, shoulder and all are apt to work in and do that which the needle point was intended to avoid.

Drawing Pen, which if purchased separately (and it is the instrument of all others that requires replacing), cannot give satisfactory results under a price of 2*s*. 6*d*., those having the lower part of the holder of a square form, to show the direction of the points, being preferable. As this instrument is more used than any of the others, it frequently requires touching up at the points. The ink foot of compasses, and the ink bows, also require touching up occasionally,* and consequently the half of ink legs should have a joint, so that when entirely unscrewed it can be lifted up and permit attention to the points, as well as allow of cleaning out any dry ink. The best thing for cleaning out such instruments is a common steel writing pen, with the one half broken off at the split. When a drawing pen or other ink points get blunt they ought to be sharpened up on a piece of common school slate with water, oil preventing the ink flowing freely.

Most drawing pens unscrew in the centre, having a pricker fitted in the upper part or handle; this is necessary occasionally for copying irregular figures to be made of the same size as the copy, by pricking the lines of the copy through to the new sheet below it. If not so fitted in drawing pen they are to be had separately, price 2*s*. It is a common practice for the same purpose to put a fine needle into the uncut end of a pencil.

File with *Knife* fitted at one end; the former part is useful for touching up an instrument, and for putting a fine point on the pencil, and the latter for pointing pencils, or for cutting off a finished drawing.

Screw Keys.—There ought always to be a little screw key or keys furnished along with compasses and bows to tighten or slacken them when found necessary. They should neither shut nor open too easily.

Parallel Rulers.—The common sort formed of two parallel parts is better than the single bar with a roller at each end,

* Instrument makers charge about 3*d*. for setting-up a pen or ink points.

which indeed for practical engineering drawings is seldom used. In choosing the former it should be specially noticed that they have no loose play, or they would be quite useless. The ordinary length is 6 inches, and price in ebony, 2*d.* per linear inch.

Drawing Pins.—A dozen or two of brass-headed drawing pins are always necessary for fastening down a sheet of either drawing or tracing paper when not to be coloured upon; good ones are to be had at 4*d.* per dozen.

Scales of feet with twelfths (or inches) are seldom to be had of useful lengths in boxes containing the other instruments. It is better to purchase them separately. See next chapter.

When a great many circles are required to be drawn from the same centre, such centre in the paper is apt to get enlarged into a hole under the best conditions; to obviate which, little round discs of horn about ⅜ths of an inch diameter, with three fine projecting points, are to be had, one of which when placed above where the centre is to be, completely preserves the paper; cost about 4*d.* each.

A half circular piece of horn or metal about 4 inches diameter, called a protractor, having degrees marked on the circumference, is useful for measuring angles, and can be either had in a set or separately (further reference to this instrument is made in Chapter XI.), price, 4½ inches diameter, of horn 6*d.*, ivory 2*s.* 6*d.*, brass 4*s.*, electrum 7*s.*

Proportional compasses are seldom sold with an ordinary set of instruments; they are so constructed with double ends as to save much time and labour in reducing or enlarging a drawing from a copy, as in taking a measurement with one pair of legs the proper alteration in size is given by the other pair, whereas with ordinary compasses the method of trial and error is required. Those made with a shifting centre for various proportions, cost, if of 6 inch, brass, from 6*s.* to 13*s.*, plain, if of electrum, 9 inch, £2 15*s.* Wholes and halves, or bisecting compasses having a fixed

centre, are exceedingly useful for making a drawing from a copy either half or double the size. Price in electrum, 20*s*.

Besides the above-mentioned there are many other instruments for engineering drawing which may be referred to here. They are generally to be had of the same maker.

A bordering pen, having a tongue fitted between the ordinary points, is useful for drawing thick lines at one operation. Price 5*s*. to 6*s*.

Some instrument boxes contain a double drawing pen, each ink end complete in itself, and so jointed that two lines can be drawn of any moderate width apart at one operation. This instrument is more used, however, by civil than by practical engineers, being employed for detailed railway plans, curves in railway lines, &c. Its price varies between 4*s*. 6*d*. and 7*s*.

Spring dividers are useful for dividing the teeth of wheels, or for dividing into any number of equal parts, as scales of feet, inches, &c. Ink bows are sometimes made in the same way, opening of themselves when the nut of the leg is unscrewed, but as they are never made with a joint in the legs they are not so good, for the reasons given in Chapter X. Price of dividers, pencil, and ink, 6*s*. 6*d*. to 7*s*. 6*d*. per set of three, electrum 10*s*.; each set in a case. The same of electrum, with needle points, 24*s*., extra quality, 27*s*.

Some boxes contain a little instrument called a wheel pen for dotting-in lines or circles, being made to fit into the compasses for the latter process. It is similar to a spur fitted between ink ends and revolving as it is drawn along, the ink being supplied at the back of the wheel. It is seldom used for practical engineering drawings, as it makes much coarser dots than draughtsmen generally like. Price, single, with sets of wheels, having dots of different patterns, 6*s*. 6*d*. to 8*s*. 6*d*.

NOTE.—Before laying aside the drawing pen and ink leg of compasses, &c., after using, they should be cleaned out

and unscrewed a little, so as to preserve the elasticity of the spring as much as possible.*

For long regular or irregular curves, strips of wood called batons will be found essential; these are accompanied with lead weights fitted on soles of wood. These batons are of various lengths, some are thicker at one end than at the other, as shown in the subjoined sections (Fig. 19), of natural



Fig. 19.

size, *c d*, some are thick in the middle and tapered off towards each end. The lead weight *e* may be 4 or 5 inches long, 2 inches deep, and from 1 to 2 inches broad, though the sizes vary. They are generally covered in with mahogany, the sole is notched in front lower edge as at *b*, so as to keep the baton *a*, when set, in position. As the curve line has to pass through points already laid off, a weight like that described is generally placed on the baton at each point. These weights are also useful for holding down a sheet flat. The price of six lead weights, covered in with mahogany, Admiralty size, and six lancewood batons, is about 60*s*. Small

* Should the little screw of pen or ink legs get lost, or overhauled in the thread from wear and tear, they may still be put to use by tying a piece of fine wire or fine string round the leg between the middle and points, which can be shifted up or down to produce the thickness of line required; or if the spring that opens the ink points loses its elasticity, or gets broken, a little piece of india-rubber or cork fitted in between will act very well until refitted in a proper manner.

lead weights for the purpose of keeping a sheet of paper flat cost 1*s.* 6*d.* plain, incased in mahogany, 3*s.* 6*d.* each.

Much drawing cannot be done without a good straight-edge, 7 or 8 feet long, 2½ inches broad, and ¼ of an inch thick, having one edge bevelled within $\frac{3}{32}$ of an inch from the lower edge.* The price of a 7 feet mahogany straight-edge is about 3*s.* 6*d.*, hardwood, 6*s.*, steel, 31*s.*

Three little triangular set squares of pear tree, or vulcanite, of 55°, 45°, and 30°, each of them having one right angle, are essential, the two former angles for projecting shadows, &c., and the last for drawing in six-sided figures, such as nuts. It is better not to have the rectangular sides of the former less than 4 inches long. The price of pear-tree set squares, if 4 inches, 4*d.*, 6 inches, 5*d.*, 8 inches, 6*d.*; vulcanite of the same sizes, 1*s.*, 1*s.* 6*d.*, and 2*s.* respectively.

As engineering is so much concerned with shipbuilding, a few parabolic moulds are desirable for any ship sections that occur in marine engineering drawings, as well as for drawing curved shadows in machinery drawings generally; also arcs of circles of large diameter will be found useful for drawing-in barrelled rods, and for various other curved details. The following representations of moulds present a series of curves, each set containing what it would require two or three of the others previously indicated to produce. These are given of full size, so that a similar set in thin wood can easily be made by pricking any of the three examples given through to the wood, or by first tracing them and pricking through the tracing on to the wood. After having delineated it carefully with a fine pointed pencil, the required mould can be cut out with a sharp penknife, then filed and sand-papered. Pear or lime tree is the best material for such purposes. They are to be had of various patterns and sizes, and in sets.

* To prove a straight-edge, draw a line along the edge, turn it over, or place it end for end with the edge towards the line; if they still coincide it is correct.

In the annexed diagram each of the three moulds is differently lined and dotted so as to distinguish them, while occupying little space. Price of any pattern of the same sizes as in example, pear tree, 6*d.* each, or 5*s.* per dozen; if of vulcanite, 1*s.* to 8*s.* each; a set of 9 pear-tree long curves costs 7*s.* 6*d.*, or 15 for 12*s.* 6*d.*; 40, Admiralty pattern, pear tree, in a case, 86*s.*; ditto, vulcanite, 60*s.*

It is hardly needful to say that the draughtsman must always possess a good 2 ft. rule for taking the dimensions of machinery to be drawn to a scale. The rule should have a brass slide, for the more conveniently measuring small orifices. Price of a boxwood slide rule variously graduated, from 4*s.* 6*d.* Also, external and internal calibers should be procured, and several little strips of wood for taking distances from models.

A good steel writing pen for printing, or for making wood or iron fractures, should be kept. For circles too small for ink bows a good steel *crowquill* is wanted. This should have as thick a holder as a writing pen, otherwise it is difficult to command. A pen intended for such a purpose should never be applied to any other.

An ordinary magnifying glass will be found useful for examining the points of drawing pen, ink bows, &c., showing better what is required to them in touching them up, if not drawing satisfactorily.

For ordinary mechanical drawings pencils marked H H are the best; * and for rougher purposes a common pencil.

A good 6 inch sponge, fine grained, is necessary.

India-rubber of the common dark description, is the best

* In handling a new pencil, there is more command over it when it is long, than when it gets cut down to about 3 or 4 inches. It is impossible to draw well with a short pencil. When a pencil gets inconveniently short it can be attached to the end of a longer piece by simply gumming a strip of writing paper about an inch broad round the joint two or three turns, or a crayon holder may be used. When pencils are cut away, until about an inch or so long, they should be thinned to fit compasses or bows, as pencils for such purposes of the proper size and of HH quality are seldom to be had.

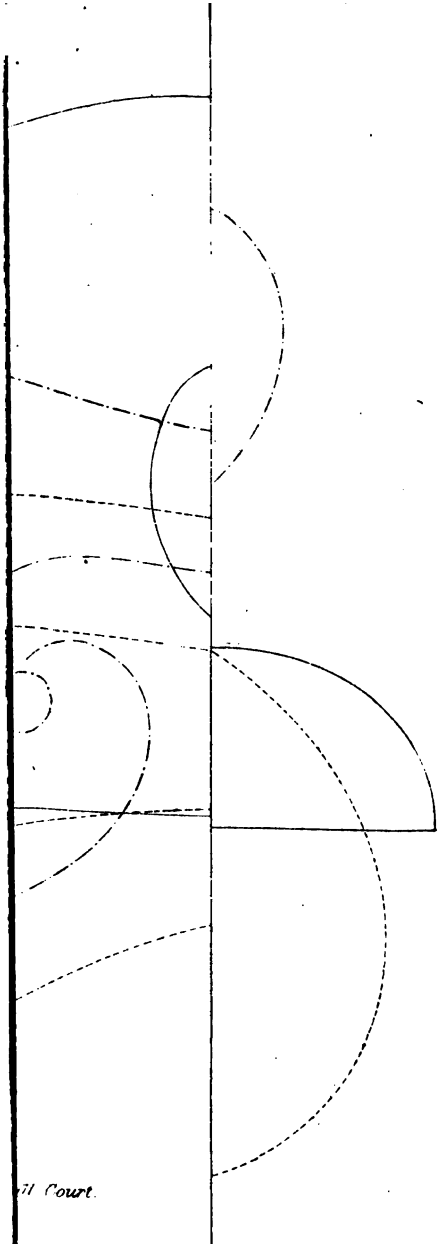

71 Court.

for ordinary drawing paper, especially if the paper is to be coloured on.

For the machine-made paper, where the pencil lines are more difficult to rub out, vulcanised india-rubber is the best.

An ink eraser may be useful for removing a blot from the paper, but should never be used on any surface to be coloured.

Further remarks upon these subjects will be found in the succeeding chapters.

CHAPTER V.

SCALES.

The best and most durable scales are of ivory; and though boxwood is often used, it will not stand so much tear and wear as the former.

A good useful engineer's scale ought to have from $\frac{1}{8}$th (and progressing by an eighth) up to 8 inches to a foot.

Scales are usually made in four different forms in their cross sections, as shown at *a*, *b*, *c*, and *d*, Fig. 20. They are generally a little over 1 foot long, and about $1\frac{1}{8}$ inch broad.



Fig. 20.

The form of edge shown at *c*, when the rule has the required scale, is useful for applying direct to the drawing, especially for minute parts, without measuring off the distance by the compasses. The scale *d* is of a convenient form, having two more additional scales at a third edge for the same purpose; *a* is the best form, if required at any time as a little straight-edge.

Price of ivory scales, best quality (as at *a*, *b*, *c*), each . . .	8*s*. 6*d*., second quality 7*s*.
Boxwood, ditto	2*s*. 9*d*.
Ivory, triangular (*d*), 12 inches long	21*s*. to 25*s*.
Ditto, 6 inches long	9*s*. to 10*s*. 6*d*.
Boxwood, ditto, 12 inches long	7*s*.
Ditto, 6 inches long	4*s*.

There are very good sets of single scales on pasteboard, and sold in cases large enough to contain all the ordinary useful scales. These are cheap compared with the sorts already referred to, and each has the scale at the edge, which is convenient, yet by frequently using them they get soiled and dirty looking, and the compasses soon begin to *tell* on the divisional lines.

Price, 18 inches long, 1*s*. each, or per dozen, in a case, 10*s*.

There is a form of scale, not so much in use now among engineers as formerly, divided differently from those just described, and of which the subjoined diagram (Fig. 21) is a

Fig. 21.

representation. It is still the form of scale put on the drawings of ship designs. In the present example there are six horizontal spaces formed by parallel lines. The last foot at each end is divided into inches by the diagonal lines, so that from the vertical line *o* at either end of scale on the second line to the first diagonal is 1 inch, and to the second diagonal 11 inches; from *o*, on the third line, to the first diagonal is 2 inches, and to the second diagonal 10 inches; and so on up to 6 inches. This scale is generally made "double ended;" so that it is immaterial, therefore, which end is used. There are other modifications of this scale,

but the example here given will be found sufficiently explanatory for the rest. They are to be had of the same materials as those first described.*

In civil architecture it will generally be found that the scale on the different *orders* is not feet and inches, but minutes and seconds (or tenths), the minute being divided into 10 seconds.

A new and useful scale† for the measurement of lines has come into use in the offices of engineers, architects, surveyors, &c. It is called a "Dionome," and gives by mere inspection every measure of a line from the $\frac{1}{50}$th of an inch to 6 inches, and the price of which is only 1*s*.

CHAPTER VI.

COLOURS, INKS, PALETTES, AND BRUSHES.

Colours.—The colours usually required for engineering drawings comprise Prussian blue, crimson lake, gamboge, burnt umber, yellow ochre, light (or Indian) red, indigo, flake white, and carmine.

An engineering draughtsman, under ordinary circumstances, may get on very well with these, but in colouring sections, &c., of steam-ships (referred to further on), requiring some little decorative art, other colours will be found necessary.

Complete sets of colours include all the foregoing, and others—as sienna, sepia, &c.—which are used in civil architecture. Excepting the carmine, which costs 10*s*. per whole cake and 5*s*. per half cake, they can be had of good quality at 1*s*. per whole cake. At a less price they are apt to be gritty, and unfit for the purpose required.

Neutral tint for shading, when sold in cake, is frequently

* Scales should never be used, as they too frequently are, as paper-cutters, which process soon serrates the edges.

† By Spanton.

too chalky for engineering drawings; it is, therefore, better to mix it up of the different transparent colours which compose such tint (for the component parts see Chapter XVI.).

Fluid colours of carmine, blue, green, &c., are to be had in bottles at 1*s.* each, and are more used in drawings of ship designs than for engineering drawings.

Inks.—Indian ink varies a great deal as to quality; indeed, it is difficult to get the genuine article. There are two sorts, one having a rough and the other a smooth exterior. The smooth is found generally to be the best, it shades better than the other, and the lines made by the smooth are not so apt to *run* in colouring over them. If the cake is of the best sort, the end, after rubbing when moist, should present a brownish hue. The cakes are sold of various sizes, and their quality being supposed to be equal, their price varies accordingly, though the shilling size is generally of better quality than the larger sort. A shilling cake, in constant ordinary use by one person, will last twelve months, frequently longer.

Fluid Indian ink can be had in bottles at 2*s.* 6*d.* each, used for lining only, that in cake being best for the shading tint.

Palettes.—Two sorts are necessary, one having a sloping recess for rubbing down Indian ink, and having three or more little round recesses or cups adjoining for mixing up tints; and a second palette is required having three or more sloping recesses only, for rubbing down each colour required separately, either for using each by itself, or before for mixing up a tint. The average price is 6*d.* each. Little saucers fitting into each other, called cabinet-nests, to keep colour moist when not using, are to be had; those having five in the set, small size, cost 1*s.*, middle 1*s.* 3*d.*, large 1*s.* 6*d.* There are also little glass tumblers made for draughtsmen for containing the water for shading, and having little indentations in the rim for holding the brush when not in use for the moment. Price about 8*d.* each.

Brushes.—In choosing colour brushes they should be gently drawn through the lips, and if on being bent against anything they still keep their elasticity, they may be considered fit for use, but if they keep the *bend* they should be rejected. They should always terminate in a point when moistened.

The prices of ordinary brushes vary very much at different shops. For all ordinary drawings there should be three sizes, and in pairs, those on each end of holder being similar.

Prices:—

2—¼ inch long, sable, per pair, and holder				7*d.*
2—½	ditto	ditto	ditto	1*s.* 4*d.*
2—¾	ditto	ditto	ditto	2*s.* 6*d.*

Sable is preferable to camel hair, as it retains its elasticity for a longer period. The cost of the latter is about two-thirds less.

The holder should be about 5 inches long—the brush at one end being used for the tint, and that on the opposite end for water.

Brushes of a larger size may be sometimes found necessary for large washes of tint. When selecting such, the ones fitted in sheet iron, instead of quill, are preferable, and will stand rough work longer.

Prices:—

Camel hair, 1¼ inch long and ⅜ inch diameter, with holder, about	1*s.*	each.
Camel hair, 1 inch long and ¼ inch diameter, with holder, about	6*d.*	,,
Sable, 1¼ inch long and ¼ inch diameter, with holder, about	7*s.* 6*d.*	,,

CHAPTER VII.

DRAWING AND TRACING PAPERS, ETC.

Drawing Paper.—The paper most commonly used for practical engineering drawings is double elephant. Of this there are two sorts—rough and smooth. The latter will be found the best for shading. Antiquarian is a larger sized sheet, and generally has a good surface to draw upon; and so has atlas paper; but neither are half so much used as the elephant. Machine-made or what is called cartridge drawing paper, has not so good a surface as any of the above, neither is it so white, its principal recommendation being found in its dimensions, it being procurable in rolls any reasonable length. It has a rough and a smooth side, the latter being the proper side to draw upon. It is frequently used for shipbuilding drawings, the other papers being too short in most cases; it is also used for large illustrations for lectures.

The following table gives the names, with their sizes, and prices per single sheet, of the several kinds of drawing paper in general use. In purchasing a quantity, the price would, of course, be proportionally less:—

Name of Paper.	Length in inches.	Breadth in inches.	Price.
Cartridge (thin cartoon)	Continuous	57	6*d.* per yard, or 25 yards 7*s.* 4*d.*
Do. (thick)	Do.	52	11*d.* per yard, best 1*s.* 4*d.*
Drawing Cartridge	54	27	8*d.* per sheet.
Antiquarian	53	30	3*s.* "
Double Elephant	40	27	8*d.* to 9*d.* "
Columbier	35	23½	7*d.* "
Atlas	34	26	7*d* "
Imperial	30	21	4½*d.* "
Elephant	28	23	4*d.* "

The prices in different shops vary a little, and the sizes of those bearing the same name will sometimes be found to differ a little from the above.

Drawing paper, ready mounted on cloth:—
Price per yard, 54 inches wide, 5*s*
,, 40 ,, 8*s*.

Tracing Paper.—Tracing paper is sold of many sizes, and of as many prices, seldom two shops being alike in this respect; but the following will be found about the average prices for the sizes given:—

40 inches by 30 inches, 6*d*. per sheet.
30 ,, 20 ,, 3*d*. ,,

24 yards, continuous, 42 inches wide, ordinary, from 7*s*. to 9*s*.

Extra stout, 16*s*.

Home-made tracing paper is much less expensive than that purchased at the shops. Common silk (or *tissue*) paper can be had at something less than a halfpenny per sheet, of the ordinary size, when purchased in quantities. To prepare it, mix a proportion of 1 of boiled linseed oil to 5 of turpentine in a cup. Put a single sheet of the paper at a time on an inverted tea tray, large enough to allow, at least, the half of sheet to lie flat. The mixture should then be put on with a small sponge, one coating only, and that not too thickly; each sheet after such process should be hung over a string stretched across the room, and when all the clear oily marks entirely disappear it will be ready for use.

Tracing Cloth.—Tracing cloth, 38 inches wide, costs about 1*s*. 6*d*. per yard.

Best continuous, 28 inches wide, 30*s*. per 21 yards.

CHAPTER VIII.

PREPARATION FOR DRAWING ON BOARDS.

To draw easily, and accurately, the paper must be stretched tight on the board; in other words, it must be quite flat. If the paper is not stretched quite tight, the process of

colouring would cause the paper to buckle up where moistened, and it would not lie flat again when dry. To get the sheet satisfactorily tight, it must be first expanded by damping it all over with a sponge and clean water, putting weights on each corner of the paper to keep it in as flat a position as possible during the process. It is better not to place the paper on the board to which it is to be gummed, as the very place which is required to be kept dry for the joint would be apt to get wetted; any other flat horizontal surface will suit for the purpose. It was formerly the custom, far more than now, to take the right side of the paper for drawing on, supposed to be that in which the name of the maker of the paper in the watermark can be read off. In the case of the paper most in use, both sides will be found so nearly alike as to render the difference, if any, of no practical importance. If any sheet has really a better looking or smoother side than another, the smoothest side is generally the best for drawing on.

As the less the surface of paper is sponged the better, the side not to be drawn on should be equally sponged all over with a sponge nearly dry, and all tiny *pools* of water lying in the hollows of the surface carefully removed. When the clear watery surface begins to look dry, or rough, repeat the process a second time, allowing the water to sink in, as before. As long as clear water lies on the surface, the paper may go on expanding during the process of fixing down the sheet, and much trouble may follow from the edges not lying flat, under which circumstances the only remedy is to take up the sheet where fixed, and let it rest a little. After the water from the second sponging has sunk in sufficiently, it is time to turn over the paper, having the drier or proper surface for drawing on uppermost, and while thus damp the edge must be fixed down firmly all round, either with hot or cold glue, or thick office gum.* If an

* Fluid gum is the quickest adhesive with which to put down a sheet, though cold glue is perhaps the cleanest. Hot glue, though it

ordinary sheet, and having a *long* way, the long sides should be fixed down before the ends; a square, or straight-edge, should be placed ⅜ths of an inch inwards from edge of paper, and weights upon it to keep it firm, and the edge of the paper turned up against it. If cold glue is to be used, it should be a piece about 8 inches long and straight on the rubbing edge, and moistened with cold or hot water (the latter being preferable), then rubbed against the turned-up edge of the paper and the board, when it will become adhesive. The edge of the paper should next be turned down and rubbed hard with the rounded end of a penknife or a piece of hard wood for the purpose, always through a strip of drawing paper about 6 inches long. In putting on a sheet with fluid gum, both the board and edge of paper should be gummed; a joint either of gum or hot glue seldom requires rubbing down, as in the cold glue process, unless the edge should rise here and there.

After the four sides have been put down, it is a safe precaution to put a brass-headed pin in each corner, and a few along the sides and ends. These assist in preventing the joint from giving way. If the sheet contracts quicker than the joint dries, a slight sponging over the surface of the sheet, keeping an inch clear of the sides, is also a safeguard.

In putting on a large sheet, which is apt to get too dry before the sides are all fixed down, a damp piece of calico, or similar fabric, is the best thing to lay on it, always keeping it clear of the edge of the sheet, the paper is thus kept expanded until the joint is dry all round. The paper, on removing the cloth, then contracts, and becomes perfectly tight for drawing on.

generally performs its work well, is *messy*, and as such, not to be recommended. The fluid gum sold in bottles is generally too thin for such purposes; the proper proportion should be equal gum with equal water, and it should be kept ready for use in a phial having a wide neck, closed by a cork with a little hole in the top of it in which to place the brush when not in use. The brush should be a hard one, about half inch long, and kept entirely for the purpose.

In putting down a very long sheet, such as for ship drawings, instead of fixing down the long sides first, as in ordinary sized sheets, it is easier to fasten down the ends first, as otherwise when such a length of sheet begins to contract, the sides would give a good deal of trouble. When the ends are put down they should be well pinned; then in each of the long sides, 8 or 9 inches of the edge in the middle of length, should be turned up, having made a little incision at each end of the little length previously, such length should be gummed, or glued, and pinned down; intermediate spaces should be opened up and treated similarly. The process should be repeated until both sides are fully fixed down. When the paper has become quite dry, the pins must be removed, so as to allow the square to do its work.

Sometimes in putting on a sheet with assistance, when it is damped and ready for turning over on the board, the edges might have the gum or fluid glue first put on, and, with a person at each end, it can be turned over easily on to its board and rubbed down, granting the gum or glue has not dried too quickly on a very large sheet. Or the paper may be fixed to the board without assistance, by placing the board as nearly vertical as it will stand against the wall or other firm object, and taking the sheet so prepared and hanging it on the board in the same way as in papering the wall of a room, immediately after which it should be placed horizontally. A board with a newly-stretched sheet should never be placed against the wall, or in any upright position to dry, as the moisture in the paper is apt to sink gradually down, and by the upper joint drying, and the paper contracting and pulling it upwards at the same time, the lower joint gets loosened. Neither should a board with, or without, a sheet on it be placed at any time against a wall whose dryness is doubtful, for where there is the least damp the board runs the risk of being warped, and if any sheet stretched upon it, would be destroyed by getting cloudy;

and if it has anything drawn on it so much the worse. A newly-stretched sheet should never be held to the fire to dry, as the edge joint is likely to be pulled up before it is sufficiently dry. It should be allowed always to dry naturally in a horizontal position.

A frame fitting over a board, as described in Chapter II., Fig. 1, without any adhesive, is seldom or never resorted to now for practical engineering drawings.

Long cartridge paper has a surface that does not suit well for some large drawings, when it is better to join the smaller sized sheets of superior surface. This can be done very neatly by thinning the edges to be joined by fine sand or glass paper, held tightly by the hand (or glued) around a flat piece of wood about 6 inches long, 2 inches broad, and ½ inch thick. The edges of the paper, which are to be joined, should be cut quite straight, after which each sheet should be placed separately, with the cut edge close to the edge of the table or a drawing board, and a straight-edged piece of wood, against which to bear in using the sand paper, placed above the paper about ⅜ths of an inch, or the breadth of what is to be the joint, inwards from the edge of paper, and held firmly by weights. The projecting ⅜ths of the paper, beyond the straight-edge, should then be rubbed with the sand-paper till it is quite thin at the outer edge; the same process should be repeated to the end of the other sheet, taking care previously that the corresponding surfaces to be drawn upon will be together when joined. Each edge of paper, so rubbed, should have a thin coating of gum. Having placed the sheets so that the joint will be somewhere on the middle of any flat surface, such as a table or a drawing board, a slip of drawing paper, at least 1½ inches broad, should then be placed over the joint, and well rubbed on the top with the rounded end of a penknife; never in any case should the intervening slip of paper be omitted. If the paper thus joined is not afterwards to be damped for stretching, a strip of smooth

wood, or a straight-edge, with a few weights, should be laid on the joint, causing it to dry flat. If, however, the paper has to be stretched on a board, it should be done while the joint is still damp. The joint should be carefully avoided in sponging the paper. When the paper is gummed round the edge, and put down in the ordinary way, a brass pin should be placed in each end of the joining of paper, and three or four on each side of it, about 1 inch apart in the common margin. A sheet formed thus, in two parts, should never have any drawing on it sponged, in the way referred to in Chapter XVI., or the joining ends would run the risk of being separated during contraction.

On any unstretched sheet of drawing paper finer ink lines are more easily drawn, the fibre of the paper not being separated by expansion. When a small unstretched sheet, kept in roll, is to be drawn upon, it will always be found to lie better to the board by keeping the hollow, or concave side, uppermost. The corners should be stuck down with a little gum, rather than pins, as the latter are apt to interfere with the free action of the T-square; but when for colouring, however small the sheet, it must be stretched and gummed down all round, for the reason already stated.

A damp sheet should never be covered up with brown paper, or the like, as such coverings are apt to leave a cloudy mark.

When the sheet is quite dry, white paper is the best covering, particulars regarding which are noticed at the end of next chapter.

Should there be at any time two drawings, one on each side of a board, one of them not being required for a time, and the other worked at, a sheet of paper should be put above the former, and gummed down all round at the edge, and a brass pin put in each corner, so as to keep the under surface from being chafed by the table, which it certainly otherwise would be after being handled about

CHAPTER IX.

STRETCHING FRAME.

If a drawing has to be made in a highly-finished style for framing, it is better to first attach the paper to the cloth already fastened to the plain stretcher, which has to be placed in the proper frame, otherwise colours and shade lines are apt to run and blot, besides running the risk of the drawing not drying on the cloth quite fair and square. Especially is this advice necessary to the draughtsman who has not been accustomed to mount his own drawings. A stretching-frame should be strong enough to resist the tension of the paper when dry, and for any length above 18 inches should have a bar or bars across. The inner top sides of stretchers should be slightly rounded over, as shown in the subjoined cross section (Fig. 22); if these corners were left square they would be apt to show a soiled mark on the paper by the time a drawing was finished. A large frame, 6 or 8 feet



Fig. 22.

long, should have two cross bars, dividing the length of frame into three equal parts, and of such thickness as when let in flush at the back the top sides only come up to the rounding of the sides, as shown; and they should be let into the sides only about one-third across, so as not to weaken them. The sides and ends of a stretcher 8 or 9 feet long, and 2 feet across, should be 4 inches by $\frac{7}{8}$ths of an inch. The frame being ready, linen or calico—the former being preferable—should be procured as white as it can be had, and it should be spread out on a table or other flat surface, and, the face side of stretcher being laid next to it, the edges of the cloth should be pulled over and nailed to the back; the ends first, then the middles of the sides, and in every intermediate space until the tacks are only about 4 inches apart, taking care always to pull it tight in putting in

any tack when opposite to another. If the edge is folded for the tacking, the two thicknesses will tend to hold the tacking better than if single. The paper to be stretched should be laid flat on a surface covered by a clean table-cloth, the side of paper to be drawn on of course being under. Sponge the paper with clean water, and let it dry in a little; and then with cold flour paste, free from knots and gritty matter, applied with a flat brush (whitewash one if the sheet is large), give the paper one or two good coats; place the frame with the cloth on the paper, and rub the back of the cloth well; turn it over and rub down the edges, which should be in a little from outer edge of frame. If any little blisters should arise from the paste not having been sufficiently cold, they should be pricked with a fine needle, and the paper rubbed down. When paper thus stretched on cloth is quite dry, it will be found nearly as stiff to draw on as a drawing-board. As the cloth at the edge of the frame will not present a good edge for the accurate working of the T-square, a strip of parallel wood, rectangular in section, and equal to the thickness of the frame, should be nailed on temporarily.

In making a drawing, mounted as described on a frame, the horizontal lines have to be worked as in long drawings on boards, by measuring up in two places in the length from the bottom, and applying a straight-edge. A long T-square, however accurate in itself, and however square the ends of boards or frames may be to the sides, would be rendered inaccurate by the least particle of grit, the end of the blade seriously so. It may be as well to mention here, that in shading and colouring a stretched drawing on a frame it is better to lean the hand on a thin broad straight-edge, or clean strip of plank long enough to reach over the ends of frame, and which will prevent the hand indenting the paper.

In covering up a drawing in progress, either on boards or stretchers, when not actually working at it, brown paper or

newspapers should never be used for the purpose—the former being greasy or tarry, and the latter apt to soil from the printed matter. Clean white paper is the best, and can be had of large size for such purposes, or several sheets can be pasted together. The best way for preserving a drawing when likely to be indefinitely prolonged, is to gum all round the edge of the cover, after the principal centre lines have been drawn in, and cut a door in it suitable to the size of the piece of drawing that is being worked at, and, when put aside, another whole sheet should be pinned all round the edge on the top of the other. A drawing cannot be kept too clean.

Drawing paper, when purchased ready mounted on cloth, is useful for various kinds of drawings, but more frequently for those of civil than mechanical engineers. It is never damped and stretched for drawing on, and rarely buckles up in being coloured. For any drawing to be afterwards framed, those whose business it is can put it on a stretching frame quite tightly, without at all injuring it.

CHAPTER X.

COMMENCING A DRAWING.

Drawing is the art of representing objects on a plane surface in such a manner that the delineation shall perfectly accord with the natural appearance of those objects. It is also the laying down the outlines of any object tastefully and correctly; and the process depends chiefly on the dexterous use of the various instruments employed, and upon preserving a strict proportion of details, so that the whole and all the parts may agree with the scale on which the drawing is constructed.

It is usual to stand when drawing, especially in making large drawings. In making small drawings, however, sitting may do well enough, as they can be conveniently worked at.

Having seen that the drawing-paper is properly stretched on the board, quite dry, and free from blemish, and, the board and square having been proved correct, a good flat point must be put on the H H pencil by a sharp penknife. Though a round point is preferable for filling in any little circular work, a flat point will do more straight work without repairing. The wood should be cut away as far back as ¾ths of an inch from the end. In using the penknife for this purpose, it will be found less liable to break the lead if the blade of the knife is held at an angle than if square across; the point can be trimmed up either on a small smooth file, or on fine sand (or glass) paper. The point of the pencil must not be so fine as to break off, and should be kept sharp by a little application of the sand-paper.

A pencil should never be wetted, as afterwards it would be impossible to rub out; besides, it is quite unnecessary.

Before using the T-square for the day, it should be wiped free from dust with the cloth kept for such purposes.

In using a square which has a shifting stock for lines to be parallel to the board, care must always be taken that it is not the shifting part of the stock that bears against the board, instead of the fixed side; the screw nut of such stock should always be uppermost.

For drawing horizontal lines the square must be kept firm with the left hand against the left edge of the drawing-board, and never, by any means, on the right side; and for drawing vertical lines the square must be kept firm, with the left hand, against the bottom edge of the board, and never against the top edge.

The lines should always be drawn along the front edge of the square, and never along the edge at the back, and always on the same side of the blade, even though the stock is not a shifting one. For the same drawing the same square should always be used.

The little triangles of thin wood (referred to in Chapter IV.), having one angle rectangular, when placed against the

T-square, are useful for drawing any series of lines at right angles to the T-square, or parallel to each other; but, unless for a series of lines, it is more trouble adjusting the square in its position across the board than shifting the T-square itself.

Having previously laid off, just visibly, the point through which the line is to be drawn, and placed the T-square in position, the top of the pencil should incline a little outwards, so as to permit the point to move close to the lower edge of the square; the top of the pencil should also incline a little towards the right. The line should invariably be drawn from the left to the right.

In making circles with pencil compasses (supposing them of the description recommended in Chapter IV., with a joint in each leg), the lower portions of each leg should be kept nearly vertical, otherwise the central point will make a large hole in the paper, which ought always to be avoided. If the circle is to be a small one, the central leg should be kept a little longer than the pencil one: for in most cases it will go a little way into the paper. A good small circle can never be drawn if the centre leg is the shortest. In drawing a circle, the bows (or compasses) should be held by the top, and kept in as upright a position as circumstances will admit of.

Before entering into the subject of copying by the pencil from an original drawing, &c., it is requisite to give, in a concise way, a few hints in geometry, the uses of which are continually recurring in mechanical drawing.

CHAPTER XI.

HINTS ON GEOMETRY.

GEOMETRY is the science which treats of the properties and relations of magnitudes.

These magnitudes are either solids, surfaces, or lines.

Solids have length, breadth, and thickness.

A surface is the face of a solid, and has only length and breadth.

A line has only length, without either breadth or thickness, and may be called the boundary of a surface.

A point has neither length, breadth, nor thickness—it has simply position; and in the crossing of two lines there is the point of intersection—it has only position.*

Lines.—Lines are either straight or curved.

A mixed line is composed of curves and straight lines (Fig. 23).



Fig. 23.



Fig. 24

Parallel straight lines are those which are equally distant from each other at every part, and however far they may be produced at either end can never meet (Fig. 24).

Fig. 25.

Fig 26.

A horizontal line is a line parallel to the horizon (Fig. 25).

A vertical line is a line upright from the horizon (Fig. 26).

* In attempting to represent lines and points on the surface of paper by means of drawing instruments, the representations can never more than approximate to the things intended to be shown. For the finest line that can be drawn will have *some* breadth; and, indeed, if it had no breadth it could not be visible. In the same way, a point may be represented by a very minute dot on the surface; still, as it covers *some* surface, it is not a geometrical point.

Angles.—An angle is the amount of opening between two lines which meet. It will be understood that the lengths of



Fig. 27.



Fig. 28.

the lines have nothing to do with the size of the angle: thus, these two angles (Figs. 27 and 28) are said to be equal.

If the lines are both straight, it is called a rectilineal angle; if both curved, a curvilineal angle. The lines are the sides of the angle; the point of meeting is the vertex of the angle.

Right Angle.—When one straight line stands upon another, so as to make the two angles equal, each of these angles is called a right angle (Fig. 29); and one line is said to be perpendicular to the other. A line which is not perpendicular to another is oblique to it.

Acute Angle, less than a right angle (Fig. 30).

Obtuse Angle, greater than a right angle (Fig. 31).



Fig. 29.



Fig. 30.

Fig. 31.

Surfaces.—Surfaces are either curved or flat. Flat surfaces are called *planes*. Curved surfaces may be called *deflected*. The hollow side is called *concave;* the other *convex*.

Triangles.—The three angles of any triangle added together are equal to two right angles.

Any side may be called the base.

Triangles are denominated according to the magnitude of their angles.

A right-angled triangle, having one right angle (Fig. 32). The side opposite which is called the hypothenuse; the other sides are, indiscriminately, one of them the base, and the other the perpendicular.

An acute-angled triangle, having its three angles acute (Fig. 33).

An obtuse-angled triangle, having an obtuse angle (Fig. 34).



Fig. 32.



Fig. 33.

Fig. 34.

Triangles are also divided according to their sides.

An equilateral triangle, having three sides which are equal (Fig. 35).

An isosceles triangle, having two sides which are equal (Fig. 36).

A scalene triangle, having all three sides unequal (Fig. 37).



Fig. 35.

Fig. 36.



Fig. 37.

Quadrilaterals.—A quadrilateral figure is that which is bounded by four lines.

When the opposite sides are parallel, it is called a parallelogram (Fig. 38).

When a parallelogram has right angles, it is called a rectangle (Fig. 39).

Fig. 38.



Fig. 39.



Fig. 40.

Square, having four right angles and four equal sides (Fig. 40).

Rhombus, or lozenge, having its sides equal, and only its opposite angles equal (Fig. 41).



Fig. 41.



Fig. 42.

Fig. 43.

Rhomboid, having its sides parallel, and only its opposite sides equal (Fig. 42).

Trapezium, having neither pair of its sides parallel (Fig. 43).



Fig. 44.



Fig. 45.

Trapezoid, having two sides parallel (Fig. 44).

Right-angled trapezoid, having two right angles (Fig. 45).

Isosceles trapezoid, having two opposite sides equal (Fig. 46).



Fig. 46.



Fig. 47.

Figures on planes and of more than four sides are called polygons.



Fig. 48.



Fig. 49.

When the sides and angles of a polygon are equal, it is a regular polygon; when they are otherwise, it is an irregular polygon.



Fig. 50.



Fig. 51.

Pentagon, five sides and five angles equal (Fig. 47).
Hexagon, six sides (Fig. 48).

Heptagon, seven sides (Fig. 49).
Octagon, eight sides (Fig. 50).
Nonagon, or Enneagon, nine sides (Fig. 51).



Fig. 52.



Fig. 53.

Decagon, ten sides (Fig. 52).
Undecagon, eleven sides (Fig. 53).
Duodecagon, twelve sides (Fig. 54).
Diagonal.—A line joining the vertices of two angles of a figure not adjacent (Fig. 55).



Fig. 54.



Fig. 55.

Circles.—Circumference, a curve line of which the points are equally distant from a point or common centre. The circle is the area bounded by the circumference (Fig. 56).

Diameter, a line passing through the centre and terminated both ways by the circumference (Fig. 57) (the proportion of diameter to circumference is as 1 to 3·14).

The portion of the circle cut off by the diameter is a semicircle.

Radius, a line drawn from the centre to the circumference; equal to half a diameter. All the radii are obviously equal (Fig. 58).



Fig. 56.



Fig. 57.

Arc, a part of the circumference (Fig. 59).

Chord, a line joining two points of a circumference, or the extremities of an arc (Fig. 60).



Fig. 58.



Fig. 59.

Segment, part of a circle cut off by a chord (Fig. 61).



Fig. 60.



Fig. 61.

Sector, space cut off by two radii (Fig. 62).

Inscribed line, a line terminated both ways by the circumference (Fig. 63).



Fig. 62.



Fig. 63.

Inscribed angle, the summit at the circumference, and the sides consisting of two chords (Fig. 64).

Inscribed triangle, the summits of the three angles at the circumference (Fig. 65).



Fig. 64.



Fig. 65.

Tangent, touching the circle without cutting it, meeting only at one point, called the point of contact (Fig. 66).



Fig. 66.



Fig. 67

Secant, a line drawn from the centre through the extremity of an arc to meet the tangent drawn from the other extremity, as the dotted line (Fig. 67).

Concentric lines, having the same centre, and therefore parallel (Fig. 68).

Eccentric lines, having different centres (Fig. 69).



Fig. 68.

Fig. 69.

Ordinate, a straight line drawn from any point of a curve perpendicular to the diameter, as the dotted lines (Fig. 70).

Abciss, the part of the diameter cut off by the ordinate (Fig. 71).



Fig. 70.



Fig. 71.

Spiral, starting from a centre and removing from it gradually (Fig. 72).

Fig. 72.



Fig. 73.

Heliæ, turning on a cylinder, and uniformly advancing lengthwise (Fig. 73).

Tangent circles (Fig. 74).

Circumscribed polygon (Fig. 75).

Ellipse (Fig. 76). The longest diameter is called the *major axis*, and the shortest diameter the *minor axis*.



Fig. 74.



Fig. 75.



Fig. 76.

Solids (*regular*).—Of solids there are a great variety. As planes are bounded by lines, and derive their names from the character and disposition of these lines, so solids are bounded by surfaces either plane or curve, and derive their titles therefrom. Regular solids, bounded exclusively by planes, cannot have fewer than four sides.

Tetrahedron, having the faces composed of four equilateral triangles (Fig. 77).

Hexahedron, having six faces equal squares (Fig. 78).



Fig. 77.



Fig. 78.



Fig. 79.

Octahedron, having eight faces equilateral triangles (Fig. 79).

Dodecahedron, having twelve faces equal pentagons (Fig. 80).

Icosahedron, having twenty faces equilateral triangles (Fig. 81).

Triangular prism, having three sides in the base (Fig. 82).

Quadrangular prism, having four sides in the base (Fig. 83).

Truncated prism, the remainder of a prism which has been cut obliquely (Fig. 84).



Fig. 80.



Fig. 81.

Fig. 82.

Hexagonal prism, having six sides in the base (Fig. 85).

Triangular pyramid, having three sides in the base and terminating in a point (Fig. 86).



Fig. 83.

Fig. 84.

Fig. 85.

Quadragular pyramid, having a quadrilateral for the base (Fig. 87).

Fig. 86.



Fig. 87.

Fig. 88.

Hexagonal pyramid, having a hexagon for the base (Fig. 88).

Cylinder, generated by the motion of a circle parallel to itself, and at right angles to its own plane (Fig. 89).

Cone, having a circle for its base, and terminated by a point (Fig. 90).

Inclined pyramid (Fig. 91).

Fig. 89.

Fig. 90.



Fig. 91.

Inclined cylinder (Fig. 92).

Sphere, the curve surface of which is at all points equally distant from the centre (Fig. 93).

Spheroid, or elongated sphere, something like an ellipse in its side elevation (Fig. 94).

Fig. 92.

Fig. 93.

Fig. 94.

Degrees.—Angles are described as of so many degrees. It is usual to divide the circumference of a circle into 360 equal parts, called degrees; these again are divided into

minutes, and the latter into seconds; and known by the following signs:—Degrees, °; minutes, ′; seconds, ″.

The fourth of a circle, as shown in diagram (Fig. 95), is an angle of 90°. The lines A B and C D are at right angles, A B being perpendicular to C D. When the radii are thus at right angles, the sector is called a quadrant.



Fig. 95.



Fig. 96.



Fig. 97

The eighth of a circle (Fig. 96) is an angle of 45°, as A B C, and it is also shown (Fig. 97) as the angles formed by a line drawn through to the opposite (but not adjacent) angles of a square, and is called its diagonal. E, F, G, H, have each an angle of 45°.



Fig. 98.

A little half-circular instrument, called a protractor (Fig. 98) (referred to in Chapter IV.), is useful for setting off any required angle, having the degrees marked all round the edge, the centre, A, of the instrument, being placed on the point on base line to which the other line forming the angle is to be drawn. It is also useful for measuring the degrees of any angle.

Another mode of drawing a line at any required angle to another line, is by using the scale of *chords* (and which will be found on most scales supplied with instruments). Let *a b*

(Fig. 99) be the line. It is required to draw another line from the point *a* at an angle, say of 35°, to the line *a b*. From the point *a*, as a radius, take the distance *always* of 60° from the scale of chords, and describe the arc *c d*; then take the distance 35° for the required angle from the scale of chords, and set it off from the point *c* on the arc *c d*, at *e*, and draw the line *a e*; *e a c* will be the required angle. In measuring an angle the same process can be applied.



Fig. 99.

*To bisect (or divide into two equal parts) a given straight line by a line drawn perpendicular to it.**

Let A B (Fig. 100) be the given straight line. 1. Set one foot of the compasses on the extremity A, as a centre; and with any convenient radius that is evidently greater than half the line, describe the arc C D; similarly from the point B, as a centre, describe another arc with the same radius, cutting the first one at the points C and D.



Fig. 100.

2. Through the points of intersection C and D draw a straight line C E D, this line will divide the given line A B into two equal parts, A E, E B, at the point E, and will also be a perpendicular to the line. It is not necessary in practice to draw the complete arcs. An experienced eye can readily anticipate the points of intersection of the arcs within small limits. Neither is it necessary to do more than apply a straight-edge to these points of intersection,

* In presenting methods of performing geometrical operations, the T-square, parallel rulers, &c., will, where applicable, assist considerably on many occasions in simplifying the solution of the problems, and with an accuracy generally quite sufficient for practical purposes.

and tick the point E, unless, indeed, the perpendicular itself be wanted, which is often the case.

The same process serves for the bisection of a circular arc; for, supposing A B to be the chord of the arc, the perpendicular which bisects the chord will also bisect the arc.

To draw a perpendicular to a given straight line from a given point in that line.

FIRST, When the point is near the middle of the line.



Fig. 101.

1. Let A B, Fig. 101, be the line, and C the point near the middle from which the perpendicular is to be drawn. On C as a centre, with any convenient radius, set off equal parts, C D and C E, on the line A B.

2. On D and E as centres, with a greater radius, describe equal arcs intersecting at F, and, if wanted, on the other side of the line also.

3. Draw the line F C—it will be a perpendicular to the line A B at the given point C.

SECOND, When the point is at or near one extremity of the line.



Fig. 102.

1. Take any convenient point C, Fig. 102, obviously within the perpendicular to be drawn from the given point B, place one foot of compasses on C, and extending the other to B, describe a circle A B D cutting the line A B at A.

2. Set a straight-edge to the points A and C, and draw a line cutting the circle at D.

3. Draw D B, which will be the perpendicular required.

Another method:—1. From the given point B set off on the given line a distance such as B A, equal to three of any units of measure, as 3 inches or 3 feet.

2. From B as a centre, with a radius of four of the same parts, describe an arc supposed to pass through D.

3. From A as a centre, with a radius of five parts, describe an arc cutting the other arc at D.

4. Draw D B for the perpendicular required.

This last method of solving the problem can be easily applied on a large scale for laying down perpendiculars on the ground. The numbers 3, 4, and 5 are, it is to be observed, taken to measure respectively the base, the perpendicular, and the hypotenuse of the right-angled triangle A B D. Any multiples of these numbers may be used with equal propriety, when convenient; as 6, 8, and 10, or 9, 12, and 15, whether inches, feet, or any other units of length.

To draw a perpendicular to a given line from a given point without the line.

First, When the point is conveniently near the middle of the line.

1. Let A B, Fig. 103, be the line, and C the point without it. On C as a centre, with a convenient radius, describe an arc cutting the line A B at the points D E.

2. On the points D E as centres, and with equal radii, describe the arcs intersecting at F.



Fig. 103.

3. Set a straight-edge to the points C and F, and draw a straight line from C to the line A B. This will be the perpendicular required.

If there be no room below the line A B the intersections F may be taken above, that is between the point C and the line. This mode is not, however, so good as the one already described, because it is not likely to be so exact.

SECOND, When the point is near the end of the line.



Fig. 104.

1. Let D, Fig. 104, be the given point, and AB the straight line. From D draw any straight line, DA, meeting AB at A.

2. Bisect AD at C, and on C as a centre, with CA as a radius, describe an arc cutting AB at B.

3. Draw DB for the perpendicular required.

To describe a square on a given straight line.

1. Let AB, Fig. 105, be the straight line, or the base of the proposed square. Draw AC and BD perpendicular to the base, from its extremities, and make each of them equal to AB.



Fig. 105.

2. Draw the line CD; this will complete the square ABCD on the line AB.

To draw a line parallel to a given line.

FIRST, To draw the parallel at a given distance.

1. Let AB, Fig. 106, be the given line. Open the legs of the compasses to the required distance, and from any two points C and D (the farther apart the better) describe two circular arcs on the side towards which the parallel is to be drawn.



Fig. 106.

2. Apply a straight-edge tangentially to the arcs at E and F, and draw the straight line GH; this will be a parallel to the given line.



Fig. 107.

SECOND, To draw the parallel through a given point.

1. Let C, Fig. 107, be the point; from C draw any line CD to AB.

2. From C and D as centres, describe arcs D E and C F.

3. Make D E equal to C F, and through the points C E draw the parallel G H. This is the line required.

The methods of describing squares and rectangles already given are also available for drawing parallels; though they are not so generally ready of application as the foregoing.

To divide a straight line into any number of equal parts.

1. Let A B, Fig. 108, be the straight line, to be divided

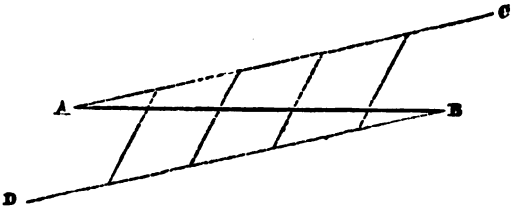

Fig. 108.

into, say, five equal parts. Through the points A and B draw two parallels A C, B D, forming any convenient angle with A B.

2. Take any convenient distance, and lay it off four times (one less than the number of parts required) along the lines A C and B D, from the points A and B respectively, and join the first on A C to the fourth on B D, the second on A C to the third on B D, and so on. The lines so drawn will divide A B into the required number of equal parts.

With the assistance of the straight-edge and the set square this process may be considerably expedited. Thus, having drawn an oblique line C B, Fig. 109, from the point B, lay off five equal parts on it; set the

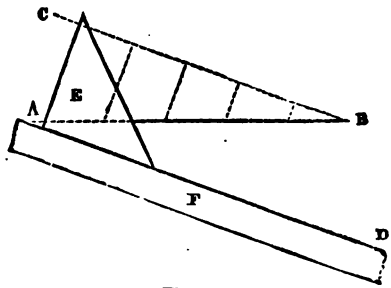

Fig. 109.

edge of the square E, to the point A, and the fifth divi-

sion on CB; slide the square parallel to itself on the straight-edge F, in the direction AD, and draw parallels from the points of division on CB to the line AB. The latter will thus be divided into five equal parts.

To construct an equilateral triangle.



Fig. 110.

1. Let AB, Fig. 110, be the length of the side of the triangle. On A and B as centres, with radius AB describe arcs cutting each other at C.

2. Join AC and BC; the triangle, ABC, thus formed is equilateral.

To construct a triangle, having its three sides of given lengths.

1. Let AB, Fig. 111, equal the base of the triangle.



Fig. 111.

On A as a centre, with a radius equal to one of the sides, describe an arc.

2. On B as a centre, with a radius equal to the third side, describe an arc cutting the former at C.

3. Join AC and BC. The triangle is thus completed as required.



Fig. 112.

To draw a straight line, so as to form any required angle with another straight line.

1. Let BAC, Fig. 112, be the given angle, and DE the line upon which an equal angle is to be drawn at the point D.

From the points A and D, with any convenient radius, describe arcs FG and HI.

2. Set off the length of the arc FG, contained between the lines AB and AC, upon the arc HI, and draw DI. The angle EDI will be equal to the given angle BAC.

To bisect a given angle.

1. Let B A C, Fig. 113, be the given angle. On A as a centre describe an arc cutting the sides of the angle at D and E.

2. On D and E as centres, describe arcs cutting each other at F. Through the point F draw the line A F, which will bisect the angle as required.



Fig. 113.

To find the centre of a circle.

1. Let A B C D, Fig. 114, be a circle of which the centre is to be found. Draw and chord A C.

2. Bisect the chord at E, and draw B D perpendicular to it, bounded both ways by the circumference. Then B D is a diameter.



Fig. 114.



Fig. 115.

3. Bisect B D at F; this point will be the centre of the circle.

Or the following method may be adopted; and it is the more expeditious of the two:—

1. From any point B, Fig. 115, in the circumference, with a radius not greater than that of the circle, describe a circular arc.

2. From two other points, A and C, beyond this arc, one on each side, describe other arcs with the same radius, each cutting the first arc in two points.

3. Through the two points of intersection thus found

draw straight lines, meeting at the point O. This will be the centre of the circle.

To describe a circle that shall pass through three given points Let A B C, Fig. 116, be the three given points.—1. From



Fig. 116.

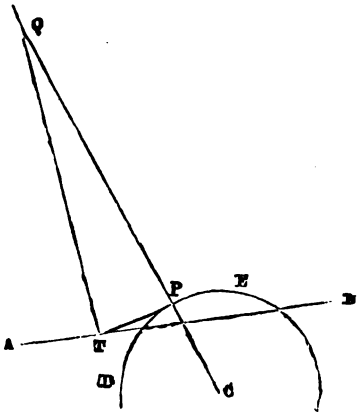

Fig. 117.

the points A, B, and C as centres, with the same radius, describe arcs intersecting each other at D E.

2. Through the intersections of any two pairs of arcs (two pairs being sufficient) draw straight lines; their intersection is the centre of a circle which will pass through the three given points.

To draw a circle which shall touch the given line A B, *and also a given circle* D E, *in* P, Fig. 117.

1. The centre of the required circle will be on C P produced.

2. Draw a tangent to the given circle at P, meeting B A in T. Then the required circle will touch the two lines P T and A B. Bisect the angle at T by a line T Q. Then the centre of the required circle will be on T Q. But it is also on C P; therefore it is at their intersection at Q.

To draw a number of radial lines upon the circumference of a circle, the centre being inaccessible.

If the radii are to be at equal distances, set off the equal parts on the circumference, as A B C, &c., Fig. 118.

On the points A B C, &c., as centres, with radii larger than a division, describe arcs cutting each other at *b c*, &c. Thus from A and C as centres describe arcs intersecting each other at *b*; and so on. Draw the lines B *b*, C *c*, &c., which will be radial lines, as desired.



Fig. 118.

To describe a regular pentagon on a given line.

1. Let A B, Fig. 119, be the given line, bisect A B at C, and draw C F perpendicular to A B. Set off on this line a length C D, equal to A B, the given side of the required pentagon. Draw A D, and produce it indefinitely; make D E equal to half A B. From A as a centre, with the length A E as a radius, describe the arc E F, cutting C F in F.

2. From A F and B as centres, with A B as a radius, describe arcs cutting each other in G and H.



Fig. 119.



Fig. 120

3. Draw the lines A G, B H, F G, and F H. A G F H B will be the pentagon required.

To describe a hexagon (Fig. 120).

Draw a circle, and with half its diameter, F E, in the compasses divide the circumference into six equal parts, and

complete the figure by drawing the lines between the divisional points, as shown in diagram.

To describe a regular octagon in a given square.

Let ABCD, Fig. 121, be the given square. Draw the diagonals AD and BC intersecting at E. Upon ABCD as centres, with a radius EC, describe the arcs LEH, NEK, GEM, and FEI. Join KG, HI, MN, and FL, which will complete the octagon.

Or, let ABCD, Fig. 122, be the given square. Draw the



Fig. 121.



Fig. 122.

diagonals AD and BC, and from the point E, where they intersect, as a centre, and with the radius EO, describe a circle, and where it cuts the diagonals at the points QPRS draw the lines HI and LF each parallel to the diagonal AD, and the lines MN and GK each parallel to the diagonal CB, which will complete the octagon.

If a circle is given in which to inscribe a regular octagon, it may be done in the following manner:—

1. Draw two diameters at right angles to each other.

2. Bisect the four arcs thus obtained, and draw chords to each—which chords shall form the octagon required.

To describe a duodecagon (Fig. 123).

If a circle is given in which to inscribe the required figure, it may be done in the following manner:—

1. Draw two diameters, AB and CD, at right angles to each other.

2. From the points A, B, C, and D, with half the diameter of the circle as radius, describe the arcs as shown.

3. Draw straight lines between the intersectional points of the arcs, as *e f*, &c., which will complete the figure.

To draw an ellipse.

Having given the two axes, set off from *c*, Fig. 124, half the major axis at *a* and *b*, which are the two foci in the ellipse, take an endless string, as long as the three sides in the triangle *a b c*, fix two pins or nails in the foci, one in *a*



Fig. 123.



Fig. 124.

and one in *b*, lay the string round *a* and *b*, stretch it with a pencil *d*, which will then describe the desired ellipse.

A figure which is often substituted for the ellipse for practical purposes, but is decidedly inferior to it in point of regularity and beauty of contour, may be drawn by means of circles in the following manner :—

1. Let A B, Fig. 125, be a given transverse diameter; divide A B into three equal parts A O, O V, and V B. From O and V as centres, with O A or V B as a radius, describe the equal circles D V F and E G O, cutting each other in the points I and K.



Fig. 125.

2. Draw the lines K O D, I V G, I O F, and K V E, cutting the circles in the points D E F and G.

3. From I and K as centres, with K D or I G as a radius,

describe the curvilineal tangents D E and F G, when the figure A D E B G F will be the ellipse required.

A common method of drawing such a figure is by placing a sheet of paper round a cylindrical object, and with the compasses describe the figure with the one radius at one operation from one centre.

Or by drawing it, as in subjoined diagram, Fig. 126, the ends *a b*, *c d*, being divided into the same number of

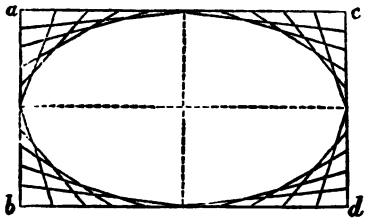

Fig. 126.

equal parts as the long sides *a c*, *b d*, which contain the larger equal divisions, and drawing the curve tangentially to the inner parts of the lines which are drawn between the several points.*

Cycloid.—A cycloid may be defined by supposing it to be formed by the motion of any given point on the float-boards



Fig. 127.

of a paddle-wheel running through the water (for finding the curve, see Chapter XIX.), or on the periphery of a cart-wheel rolling along a level road. Thus the circle A B, Fig. 127, may

* There are various methods of describing such curves geometrically and mechanically. The reader is referred to works on the subject.

be supposed to represent a cart-wheel rolling in the direction ABA, and A to be the given point in its periphery. Under these conditions the track of the point A during one revolution will be indicated by the curve line ACAGA, which is termed the cycloidal curve.

Epycycloid.—An epicycloid differs from the cycloid in this, that it is generated by a point in one circle rolling upon the circumference of another, instead of a level surface (Fig. 128).

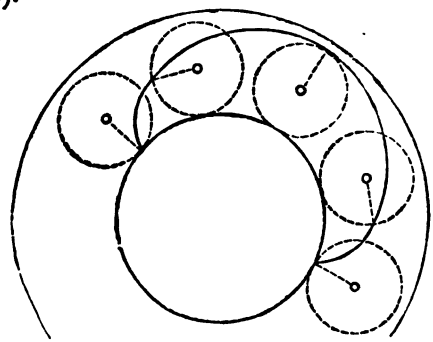

Fig. 128.

Catenary curve.—A curve assumed by a chain or cord of uniform substance and texture, when it is hung upon two points of suspension (whether those points be in a horizontal plane or not), and left to adjust itself in equilibrio in a vertical plane.

Sections.—If any object be cut through in any part, either of the two surfaces thus produced is called a *section*. If a cylinder be cut through the middle lengthwise, the section is a rectangle. If it be cut through parallel to its ends, the section will be a circle. If, instead of cutting the cylinder parallel to its ends, it be cut obliquely, as at BC, Fig. 129, the section will be an ellipse, as shown at A.



Fig. 129.

To describe the ellipse produced by cutting a cylinder obliquely.

Let A, Fig. 180, be the elevation of the cylinder, and *c d* the angle at which it is cut. Draw a half-plan B, of cylinder, divide B by any number of vertical lines from *e f g h i*, and produce them to meet the line *c d*, and through the points *m*, *a*, &c., where the vertical lines intersect it, draw the lines *l n*, *b p*, &c., at right angles to *c d*, and on each of these lines set off the points *a b*, *a p*, each equal to *g k* on half-plan, and *m l* and *m n* each equal to *f o* or *h r* in half-plan B, and so on with the remaining breadths from plan. A curve line passing through the points thus found will be the form of curve or ellipse at the section *c d* of cylinder as required.

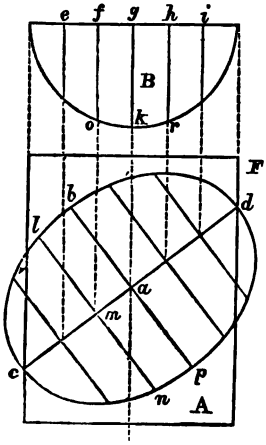

Fig. 180.

A conic section is the section obtained when a plane cuts a cone. Conic sections are of five different kinds, namely:—

1. Triangle, when the plane cuts the cone through its axis.

2. Circle, when the plane cuts the cone at right angles to its axis, as at *a b*, Fig. 181.

3. Ellipse, when the plane cuts the cone obliquely, passing through the two sides, as at *c d*.

4. Parabola, when the plane cuts the cone parallel to one side, as at *e f*.

5. Hyperbola, when the plane cuts the cone so as neither to meet nor be parallel to the opposite side, as at *a h*.



Fig. 181.

To describe the curves in cone sections.

Of a parabola, or section parallel to one side of cone:—Let A, Fig. 132, be the cone and *d e* the section parallel to *f b*, a front view of which is required. Draw a centre line *n′ o*, parallel to *d e*, cut the cone by the divisional lines *g h i k* parallel to the base *b c*, draw a half-plan of cone B, and with radii equal to

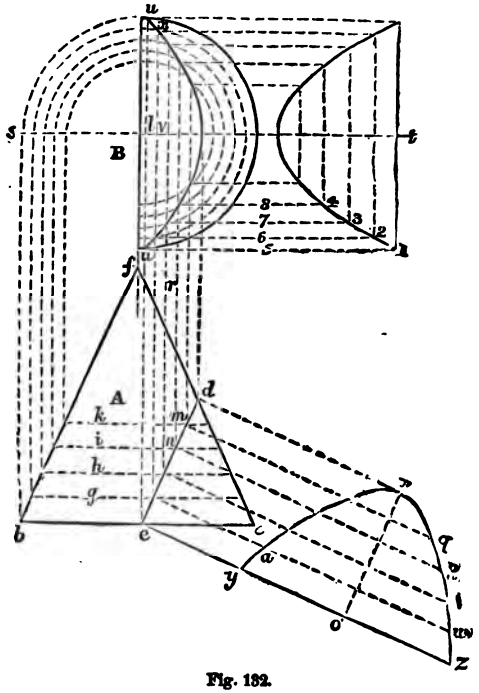

Fig. 132.

half-diameter of the cone at each of the horizontal sections *g h i k* describe the corresponding circles in plan B. From the points *m*, *n*, &c., in the horizontal lines *k*, *i*, &c., where the sectional line *e d* intersects them, draw the lines *m q*, *n p*, &c., at right angles to *e d;* and from the points *m*, *n*, &c., on sectional lines, draw vertical lines *r* to the plan, cutting their respective circles. Through centre of plan B draw

the horizontal centre line *s t*, corresponding to centre line *o n'*, on which the curve points are to be laid off; take the distance *l u* from plan B and set it off equally on each side of centre line *n' o*—at *y* and *z*—this will represent the breadth on the base line of figure; then transfer the distance *v x* from plan equally to each side of the centre line *o n'* at *a* and *w*, and so on, transferring each distance on plan to each side of the centre line *n' o*, on their respective lines. A curve line passing through the points will give the form of curve required. To find the form of curve in the same section *e d*, when observed from points at right angles to axis of cone, draw the vertical lines 1, 2, 3, 4, &c., at right angles to centre line *s t* of plan B, and at equal distances to *g h i k* in cone A, and from each of the points in the circles in the plan

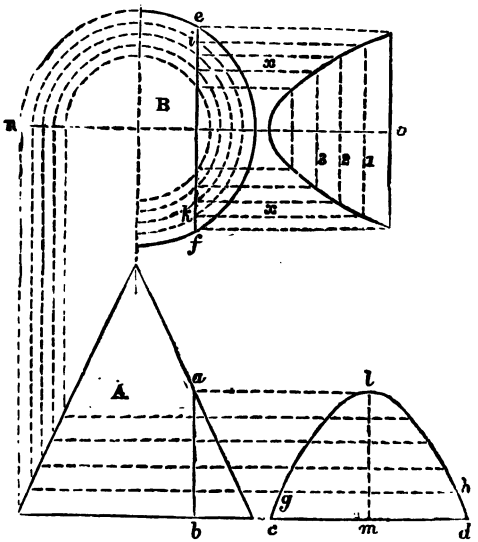

Fig. 133.

where the vertical lines *r* cut them, draw the horizontal lines 5, 6, 7, 8, &c., cutting their respective vertical lines 1, 2, 3, 4, &c. A curve line passing through the intersec-

tional points will give the curve required; a curve line passing through the points in the circles in the plan where the vertical lines *r* cut them, will also give a plan of the parabola at the sectional line *d e*.

In describing the curve of a hyperbola, or section of a cone already referred to, the same process is gone through as in the last example. Let A, Fig. 133, be the cone, and *a b* the sectional line. Draw a half plan B, and sectional line *e f*; draw a vertical centre line *l m*, on each side of which the curve is to be set off from the intersections in the plan B; make *c d* and *g h* each equal to *e f* and *i k* in the plan B, and so on, transferring the half-breadths from the plan B to each side of the centre line *l m* equally from it on their respective lines. A curve line passing through the points will give the form of hyperbola as required. Or, produce the horizontal centre line *n* of plan B to *o*, and draw the vertical lines 1, 2, 3, &c., corresponding to the horizontal lines on side view of cone A; and from the points in the circles in plan B, where the sectional line *e f* intersects them, draw the horizontal lines *x* to the respective vertical lines 1, 2, 3, &c. A curve line passing through the intersectional points will be obviously the same as that set off at the line *l m*.

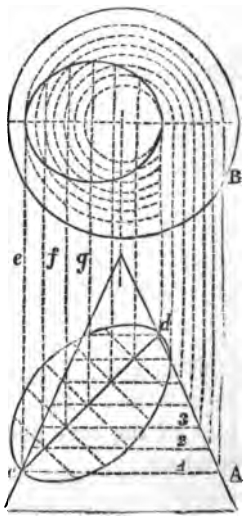

Fig. 134.

In describing the curve of an ellipse, or the oblique section of a cone, the same operation is performed for finding the curve points as in the previous examples, A, Fig. 134, being the cone, B the plan, and *c d* the oblique line of section, through which the horizontal lines 1, 2, 3, &c., are drawn, and to which the diameters of the circles in the plan correspond, as shown; the vertical lines *e*, *f*, *g*,

&c., from the points in cone A, where the section *c d* cuts the horizontal lines 1, 2, 3, &c., are produced to the plan, and intersect the respective circles; the half-breadths at the intersections are transferred to each side of the line of section *c d*, on the lines which are at right angles to it. A curve line passing through the points will give the form of ellipse as required;* a curve line passing through the corresponding points in plan, where the vertical lines intersect the circles, will give the plan of the ellipse.

ENVELOPES, OR COVERING OF SOLIDS.—*To find the envelope for a given cone.*

Let A B C, Fig. 135, be a cone whose diameter is B C, and slant side B A; it is required to find the envelope.

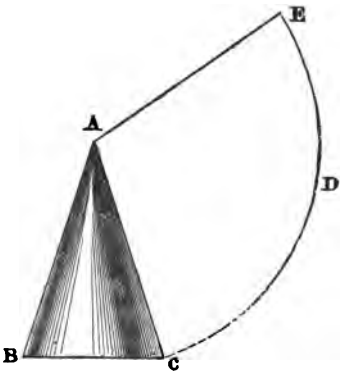

Fig. 135.

From A as a centre, with the radius A C, describe a circle C D E, make C E equal in length to the circumference of the base of the cone and join A E; the figure A C E will be the envelope.

* It may be necessary here to remark, that though the upper part of the section intersects the cone at a much less diameter in its length than at the lower part of the section, nevertheless each half of the [illegible] from the middle of its length is identical.

To find the envelope of a given frustrum of a cone.

Let F G B C, Fig. 136, be the frustrum of a cone whose base is B C, it is required to find the envelope.

Produce B F C G until they meet at the point A; from A as

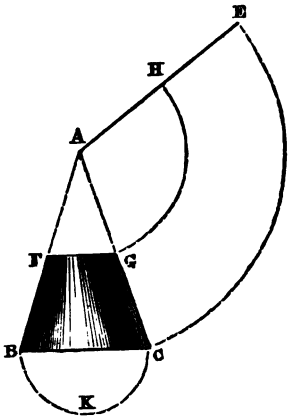

Fig. 136.

a centre, and with the distance A G as a radius, describe the circle G H; and from A as a centre with radius A C, describe the circle C E; make C E equal to the circumference of the base of cone and join A E; the figure G C H E will be the envelope required.

The length of C E may be found approximately by describing a semicircle B K C and dividing it into minute equal parts, and making the length C E equal to twice the number of such minute divisions, as in B K C.

To find the envelope for a cylinder having one of the ends cut off at an angle to its sides.

Let A D B C, Fig. 137, be the given cylinder, having one of its ends A D at an angle to its sides; it is required to find the envelope.

Upon the base B C draw a semicircle, which divide into any number of equal parts (the more parts the better), as at

1, 2, 3, &c., through these points draw the lines 1, 1; 2, 2; 3, 3, &c., parallel to the side A B of the cylinder; then mark off as in the right-hand diagram, the line H I K equal to the circumference of the base of the cylinder; or, otherwise, equal to twice the semicircle drawn on B C. Upon H I K set off on each side of I the same number of equal divisions as

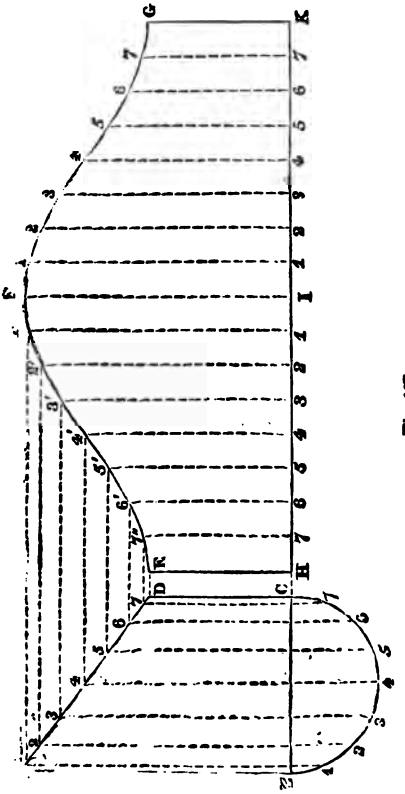

Fig. 137.

in the semicircle B C, and draw lines as I F, 1, 1′; 2, 2′; 3, 3′; &c., perpendicular to H I K. Make I F equal in length to B A, and H E and K G each equal to C D, also each of the perpen-

diculars equal to the lines in left-hand diagram, having the same figures, 1, 2, 3, &c.; a line drawn through these points will be the form of the required curve for one side of the envelope, the whole of which is contained in the figure H E F G K.*

To cover a dome having the joints in vertical planes, supposing the axial section given, and also the breadth of the base of the envelope.

Let A B C, Fig. 188, be the axial section, and K *f* the base of the envelope; the length C E is made equal to the curve A B C, and divided into the same number of equal

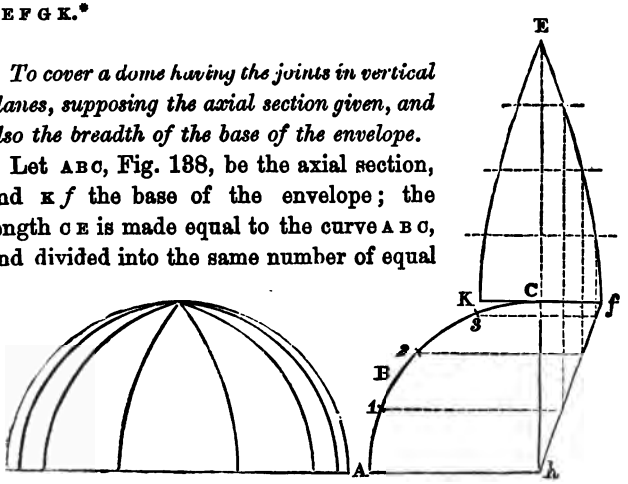

Fig. 188.

parts; join *f h*, and through the points of division, 1, 2, 3, draw lines parallel to the base A *h*, then the lines intersected between the axis *c h* and *f h* will be the half-breadth of the envelope at the corresponding divisions on C E, through which points draw the curve *f* E and K E, which will give the form of envelope required as E K *f*.†

* The foregoing is useful, practically, for making the elbows of pipes of sheet metal, saving much time and trouble, and avoiding waste of material.

† Much the same process is used in the formation of the spherical ends of round boilers, allowance being made for a greater diameter at one side than the other for overlap of plate for riveting.

Geometry, as applied to drawing ordinary engineering details, will be found in Chapter XIII.

CHAPTER XII.

DRAWING FROM A COPY.

COPIES to be drawn from should either be drawn by hand, or engravings or lithographs, but *not* wood-cuts, as their lines are never so fine, or their shadows as distinct. A beginner especially should never use wood-cuts to copy from, unless they are very plain indeed.

If there are several copies of the engraving or lithograph from which a drawing is to be made, the same copy should always be used, as rarely any two impressions of the same plate are exactly of the same length and breadth, on account of the inequality of the moisture, and consequent unequal expansion of the different sheets when printed.

In drawing, *time* is not so much an object as correctness, though in actual business, the quicker a plain drawing is made the better, if correct.

Before drawing from the copy (original), a cutting-off line should be drawn all round the stretched sheet a little way inwards from the part adhering to the board; in a large sheet it should be at least one inch inwards from the outer edge of the paper, so as to be quite clear of the gum joint.*

Nothing detracts so much from the look of a good drawing as a too small margin. A drawing occupying a space of 1 foot or 15 inches square over all, should have at least a clear margin of 5 inches equally all round, with the border line from 1½ to 2 inches from cut-off edge of paper; and other sizes in proportion.

By measuring, the middle of the sheet each way should be found; the centres also of all the views to be drawn should be put in from the copy.† Supposing there are to

* The space thus marked off is also useful upon which to try the drawing-pen before drawing a line when inking-in a drawing, or for trying the tint when colouring (when the drawing is not covered over in the manner described in a previous chapter).

† For a beginner, the drawing to be made should be of the same size as the copy (or original).

be three elevational views and a plan. It is usual in a properly got up enginering drawing to place the plan above the side elevation, and central on the paper if possible. End elevations, or sections, should be to the right and left of the principal elevation.

In copying from a tracing it is essential to put a sheet of drawing paper underneath the tracing; it not only shows the lines to more advantage, but prevents the compasses tearing it while taking off measurements.

All measurements should be taken in the exact direction of the distance to be measured, or an obviously incorrect distance will be the result. The same rule applies when transferring the distance to the drawing about to be made.

In taking a measurement from the copy, it is better to first open the compasses and then close them to the distance, than to place the leg point on one extreme of the distance, and then open them to the other; the right hand holding the compasses resting on the copy and also on the paper while transferring it. In making the mark, the compass point should never be pushed into the paper, a slight mark being all that is necessary; a fine pointed pencil will render the mark more visible if required.

From the centre of the copy the distance of the base line of the elevations should be found by foot rule or slip of paper, transferring the same to the sheet to be drawn upon, and draw the base line, holding the pencil as directed in Chapter X., and not pressing too heavily, or superfluous lines will be difficult to rub out, and the fine point apt to break. Take, by the same process, the distances from centre of copy to the centres, right and left, of the several views, transferring them to the sheet, and drawing in these respective centre lines of the views required to be drawn. Find the distances from base line to all the principal working centres, and transfer them to the sheet, as well as their positions laterally; and then general distances, and fill up between with the details, making it a rule to put in

centre lines for any objects which are to have both sides equally distant from it. Recourse must be had to light pencil centre lines on the drawing to be copied from, where necessary, to measure from. Pencil lines should exceed the proper length a good deal, so as to see where to terminate other lines meeting them. In making a wrong pencil line among finished pencil details it is better only to scroll it out with the pencil than to rub it out with the India-rubber, which is apt to obliterate more than is wished.

The centre lines in all cases, in machinery drawing especially, must be correctly placed, as, in making a real machine from a working drawing its correct working depends on that. When an object has both sides alike the half of the whole diameter, or breadth, should be taken from the centre line in copy, observing also that the same distance agrees with the other half from centre line before transferring it, thus proving it correct for such whole breadth. With the correct half of diameter the distance is then transferred to each side of corresponding centre line on sheet to be drawn upon. When drawing by artificial light, measurements can be taken with the fine point of the pencil of the compasses, which will show a mark when transferring a size to the paper, though this instrument should not be used if a mark from the compasses can be seen at all.

In drawing circular details, a little temporary pencil mark, as shown at *a*, Fig. 139, should be put around the centre of a circle while the eye rests on it, and arcs of circles which are united, having different radii, should have a temporary pencil line drawn from each centre to its respective arc, as shown at *b c* and *d*, so that when about to ink in the drawing, centres of the required circles can be readily found. In drawing large pencil circles with the large compasses, and more especially with a lengthening bar attached, the



Fig. 139.

pencil end should never be touched while drawing the circle, the compasses being held by the top only.*

In copying a plain drawing in a hurry, it saves much time to place the copy at the right hand side of the sheet, fair and square to the board, and held by weights or pins at the corners. With the T-square placed at the horizontal lines of the copy, corresponding lines can be drawn on the new sheet. Having done these, the copy can then be placed at the top of the sheet, and the vertical lines or breadths similarly drawn in with the T-square. Of course this method cannot be so well relied on; for, should the copy be a little incorrect, there is not the advantage of finding the exact measurement on each side of a centre of a whole breadth, neither is it good practice for a beginner, who has to learn to take correct measurements. When only one view of a steam-engine has to be made from a drawing where two or three views are shown, the side elevation (or the view showing the crank breadth) is the most likely to explain on what principle it is constructed. The side elevation of most machinery other than the steam-engine, would generally give the best idea of the construction, when only one view is to be shown.

In a drawing having a front and side elevation and plan, the former two should agree in all points in the several heights, and the breadths of the plan should agree in all points with the front elevation above which it is placed; and in making such drawings one measurement should be sufficient for a height for either a front or side view, or a breadth in side view and plan, the T-square being used to draw the respective height across for the two former, and placed vertically for the breadths of the two latter.

If two views are to be shown of the same machine, with

* If a circle has to be made larger than the ordinary lengthening bar will admit of, and to save the expense of beam compasses, already referred to in Chapter IV., a piece of flat wood may be tied securely to the compasses, having the ordinary pencil foot at the other end, and at the proper distance.

the working parts in a different position, having once got the centre lines in each view, one measurement by compasses should be applied to the corresponding part in each of such views, and thus save time by not doing the same thing twice over.

In making a full-sized copy of any irregular figure, it is sometimes the practice to lay the copy over a blank sheet and to prick it through with a fine needle* fastened in top end of pencil, or with the pricker generally attached to drawing-pen handles. This, however, is not so good as tracing the figure from the copy, then turning the tracing over, and retracing on the back of the figure first traced; lastly, laying the tracing in proper position on the drawing paper and going over the figure with a hard pencil, there will be left a sufficiently distinct line to ink in by.

The method of tracing is also useful in making an irregular figure, or combination of curves, when the same figure is to be shown on each side of a centre line. Having traced the figure on one side of the centre line by the pencil, draw a centre line also on it, and transfer the tracing to the sheet on which it is to be drawn—having also its centre line, with which the line on tracing must correspond—and proceed as before explained. In measuring an irregular figure from a copy, such as is shown in subjoined diagram, Fig. 140, draw



Fig. 140.

a line *a b*, and divide the line by any number of divisional lines across and square to *a b;* make similar lines on the part of sheet on which the figure is to be drawn; then measure from the line *a b* to edge where the cross lines intersect,

* Pricking through is generally resorted to by shipbuilders in making a copy of a drawing, but if frequently performed from the same original, the latter becomes so full of little holes as to destroy the drawing.

which will give all the points through which the curve is to pass. In a regular curve, the line can be drawn with a baton and weights, as shown at Fig. 141, or by the moulds described in Chapter IV.



Fig. 141.

In measuring lines from a copy when they are not continuous, as shown at *a*, Fig. 142, draw a pencil line to *b*, in direction *f a* in copy, and from *a* to *c* in direction *a e*. The measurement can then be taken from a given point, or centre line, *d*, in base line to *c*, and also from *d* to *b*. Producing *f a* to *b*, mark off the length *b a*, join *a c;* then mark off the length *c e*, and if *e g* is parallel to *a b*, take the parallel rulers, holding the bar of rulers next to you firm with the left hand, and set the edge of the other bar to *a b*, move back to *e g* by the right hand, and draw the line.



Fig. 142.



Fig. 143.

In drawing such objects as the side view of an oscillating cylinder, or anything similar, and inclined, a perpendicular should be raised for one line square to the centre line of the object, and any other lines which require to be so, made parallel to it.

In drawing the sides of any "barrelled" rod, those which are thicker at the centre than at the ends, such as connecting rods, the ends or necks *a f* and *e d*, Fig. 143, and the diameter

at the middle, *b c*, are first marked off, and if a circle, and not too large for the compasses, the radius is found as already described in the last Chapter (XI.). But if too large, recourse must be had to a mould, being the segment of a circle large enough. If not a part of a circle, probably a parabolic mould for one half of the length (being a varying curve) would suit; and if so, the form must be drawn only as far as *a b*, a mark being put on edge of mould at the centre line *b* (which is always better than at the extremes, as at *a* or *e*), and the mould then turned over and the mark on edge of mould being made to coincide with centre at *b*, the other half, *b e*, can be drawn, making the two ends of the curve equal. The process is performed again for *f c* and *c d*. A stiff baton and weights, as described in Chapter IV., might do very well, marking more diameters in the length of the object.

Reducing or Enlarging a Drawing from a Copy.—To make a drawing half the size* of copy, the half of everything should be taken, keeping to the same rule in regard to drawing in base line, centre lines, and general heights as has been already described. If a drawing is to be made twice the size of copy, whole diameters, &c., are taken and transferred on each side of the several centre lines, doubling the heights, &c. Proportional compasses (reference to which will be found in Chapter IV.) are generally used for such purposes.

When reducing by scales, it is not essential to use the same scale as that to which the original is made: for instance, if a drawing is to be made half the size of another drawing whose scale is 1 inch to 1 foot, instead of applying an inch scale to the original drawing, and using a half-inch scale for reduced copy, any scale may be applied to the original, the reduced drawing being made to another scale in the proportion of 1 to 2 to the greater.

* Which means half the scale of copy, therefore covering only a quarter of the area.

The same remarks apply to drawings to be made to a larger scale * than an original, proportion between the two scales being all that is required. When a drawing is to be enlarged to more than double, or less than half the size of the original, and if a scale or proportional compasses are not used for the purpose, it is better to take whole sizes from the original, and transfer such measurements to the margin of the sheet to be drawn upon, from which the desired proportion can be taken, as dividing by trial and error on a good drawing destroys its appearance by the numerous marks made by the compasses.

Before going into the process of inking-in a drawing, which will be treated of in Chapter XIV., preparation for drawing from a model or from large machinery, such as a steam-engine, requires some further instruction than in simply describing the making of a drawing from a copy.

CHAPTER XIII.

DRAWING FROM MODELS AND LARGE MACHINERY.

In drawing from a model, it is seldom necessary to make any sketch for marking the sizes on previously, a narrow strip of wood for taking off the heights, &c., compasses, external and internal calibers, being sufficient to transfer, as it were, the model to the paper.

In taking the measurements from a large engine or machinery to be drawn to a scale, more appliances are requisite; though in drawing to a scale we proceed much in the same way as in drawing from a copy, as regards all the centre-line work, &c. If a model is to be drawn to the

* If *twice* the scale of the original, it would be equal to four times the area.

same size, there is nearly as much merit in doing that well as when a greater or less size is wanted, correctness in either case being the principal thing. For large machinery it is necessary to be able to sketch well by hand, and this requires practice. Paper ruled down and across is frequently used—heavy lines showing feet, and light lines inches.* By rough measurements, a view can be sketched on the ruled paper bearing nearly the proper proportions of the parts, and on which the right dimensions are marked accurately after measuring more correctly. But the more common way is to make the sketches in a book having no ruled lines. The larger paged such book is, the better; and if less than half an inch thick it cannot comfortably be held flat for the operation. The following also are requisites:—a two-foot rule with slide, to go into narrow apertures, a straight-edge, a steel draw-point, a large workshop square, external and internal calibers, an ordinary pencil, and a tape line. In most cases an assistant is necessary; in others, a tape line with a hook (instead of a ring) will be found convenient; a light straight-edge, 10 feet long or so, with feet and inches marked on the side at edge, will also be found useful.

As it is necessary to have the entire arrangement of the machine before you when commencing to make your drawing to a scale, a complete sketch of side elevation or view to be drawn is to be made in the sketch-book. On this the principal lengths and heights over all are marked, and heights of working centres from a level line, such as the lower edge of bottom plate, if an engine, or bed plate of any machine; and, having found the centre of the machine, all the distances right and left from that centre to the working centres in feet and inches should be marked. In marking feet and inches, one tick above feet indicates feet, and two tinks above inches will indicate inches. The distances

* Price 1*s.* per sheet.

between two extremes are shown as in diagram, Fig. 144. If inches only have to be marked, a cipher and one tick placed above it should be put for *no* feet, and if feet and *no* inches are to be marked, a cipher and two ticks placed above it should be put for *no* inches. By observing this rule a deal of trouble will be saved; otherwise, when laying down the drawing to a scale from the sketch sizes, it is sometimes impossible to tell when only inches are intended; and, with the tick or ticks absent, whether such figure is for inches only, or for both feet and inches; for instance, 13, intended to be inches, may be taken for 1 foot three inches.



Fig. 144.

Having sketched in such different views in the manner described, with the general distances and dimensions, the different parts must then be sketched in detail, large enough to mark the particular sizes upon, and this on a fresh page of sketch book, placing all the different views of the one object together, as is represented in diagram, Fig. 145, show-

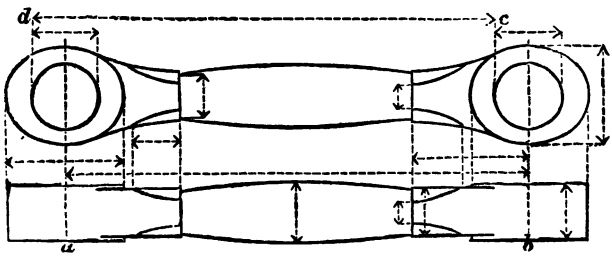

Fig. 145.

ing a common engine link,—the upper being the face, and the lower the side views. The distance between the centres *a* and *b*, if the eyes are of the same diameter, can be easily found, by measuring from the inner part of the diameter of one to the outer part of the diameter of the other, as at *c d*; if both ends are alike, of course it will only be necessary to

mark the sizes once, though all the sizes may be distributed in both ends and marked so in sketch. In taking diameters with the calibers, they should just touch, and never be pressed on, or they would give the size inaccurately, in consequence of their springing again inwards when removed from the object.

In drawing an object like that described to a scale, the centre lines in the long direction should be first drawn, then the centre lines across at each eye, and from these centres the other lengths follow as measured. In a full-sized working drawing on paper, the centre lines should be put in in red ink, and iron and brass sections by their respective colours. In sketching circles from 2 to 6 inches diameter, a very round one can be made by holding the pencil in the same way as in writing, and placing the little finger in position as a compass-leg and turning the paper round upon a smooth surface by the left hand and holding the pencil steadily with the right.

In measuring toothed wheels, the diameter is taken at the pitch line, as shown at *a d*, Fig. 146, which coincides with the line of contact of teeth when geared. The pitch of teeth, or distance from the centre of one tooth to the centre of tooth



Fig. 146.



Fig. 147.

adjoining, as at *b c*, is also measured on the pitch line. For form and proportion of teeth see further on.

In measuring inconvenient objects and distances, as, for instance, between two columns *a* and *b* (Fig 147), take two pieces of convenient material, or straight-edges, *c* and *e*, which, for obvious reasons, must be of greater length than half the distance between the columns; place the one above

the other, as shown in diagram, and their extremities in contact with the columns, and either measuring the distance on the straight-edges while so held, or by putting a mark with the draw-point or pencil at the end of upper straight-edge *c* at *e*, they can then be taken down and the length measured; and adding half a diameter of each column for the distance from centre to centre, if such measurement is required, or if the columns are of the same diameter, add one diameter only. If the columns are tapered, care must be taken to mark the exact place on the columns where the distance was taken, so as to take the diameters at the same place.

The subjoined diagram, Fig. 148, shows another way of measuring objects similar to that which has just been described, though in this case some assistance is required. By placing a long parallel straight-edge against the two columns, and with



Fig. 148.

a square placed in the positions as shown, and by making a mark on straight-edge at *a* and *b*, if the columns are of the same diameter, this one measurement will give the distance from centre to centre.

In taking the outside diameter of a large round object, such as a cylinder five or six feet diameter, when it cannot be measured across at either end conveniently, the easiest way is to place straight-edges, one on each opposite side of the cylinder, and so held as to be firm enough to measure the distance between the straight-edges by another straight-edge at their extremes. If the distance between is the same at each end, that will give the outside diameter. This is more in reference to a cylinder placed vertically. If lying horizontally, and the ends, from their surroundings, cannot be conveniently got at, a stout straight-edge should be set

firmly across the top side and propped up below to keep it quite level, which it must be; a plummet can then be held against the straight-edge and one side of the cylinder, and the place of the string marked on the straight-edge; by repeating this process for the opposite side of cylinder, the distance between such marks will be the outside diameter. If a cylinder has a square flange at top or bottom it generally facilitates the measurement of the diameter, as the length of the sides is easily taken, and the distance measured from them to outer diameter of cylinder.

In measuring any irregular figure, as in the subjoined diagram, Fig. 149, place a straight-edge in a convenient posi-

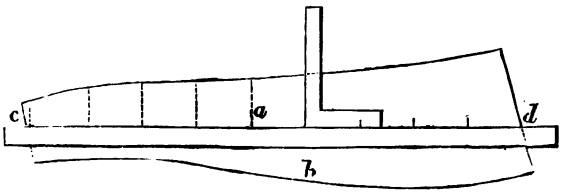

Fig. 149

tion, and hold firmly by weights on the object, then mark off any number of divisions along the edge *c d* (the distances between which should be marked on the sketch in notebook), the lines *a* from divisions being drawn with a square by chalk or a draw-point; having completed these lines all along the length of object, the breadths can be measured on these lines from the straight-edge to the side of the object, and each marked on its corresponding divisional line in sketch. Having drawn a line at *c d* the straight-edge can then be removed, and the lines *a* produced across to the side *b* of the object, and the breadths measured on that side from the line *c d* to the edge.

It is hardly necessary to add, that the first thing to be done in making the drawing of such object to a scale is to draw the straight line *c d*, with the divisional lines following.

In taking the size of a six-sided nut of which a drawing is to be made, the measurement should be taken across its greatest diameter, as at *a*, Fig. 150.



Fig. 150.

Longitudinal sectional elevations (or objects cut through lengthways vertically), longitudinal sectional plans (or objects cut through lengthways horizontally), and transverse sections (or objects cut through across vertically), are necessary drawings at all times, and to get measurements from the actual engine to make such drawings is often an impossibility, however essential it is to show internal arrangements, often made in the casting of a piece of machinery and never seen again unless broken up. There is often no other way of showing the thickness of material than a section. If the object in question is in process of construction in the factory the only resort for what is required for the purpose is the large original working drawings which show the structure of the interior parts.

In drawings of machinery it is usual to place the plan above the side elevation and central on the paper if possible. End elevations or sections should be to the right and left of the principal elevation, and adjoining the end of the elevation which they severally represent.

When only one view of a steam-engine has to be made, the side elevation (or the view showing the crank breadth) is the most likely to explain on what principle it is constructed. The side elevation of most machinery, other than the steam-engine, would generally give the best idea of the construction, when only one view is to be shown.

If two views are to be shown of the same machine, with the working parts in a different position, having once got the centre lines in each view, one measurement by compasses should be applied to the corresponding part in each of such views, and thus save time by not doing the same thing twice over.

Different views of the same object on the same sheet should be equidistant from their several extremes, and if there are to be two or three sets of views of different objects on the same sheet there ought to be a greater space between each set than the distance between the individual views of each set. If on the same sheet of paper different details are to be drawn to different scales, the things of most importance and those most intricate should be drawn to the larger scale.

Sections surrounded by other views of the same object should have it stated where it is taken through, the letters having reference to the other views which have corresponding letters where such section is taken.

In finished *pictorial* sections, the parts that would be visible in the real machine, beyond and around the section, are generally shown, though in a sectional working drawing for the workshop the section only is all that is necessary, it not being intended to produce a pictorial view, but to show the actual thickness, &c., of material at the part sectioned.

In the little example of sections subjoined, Fig. 151, the

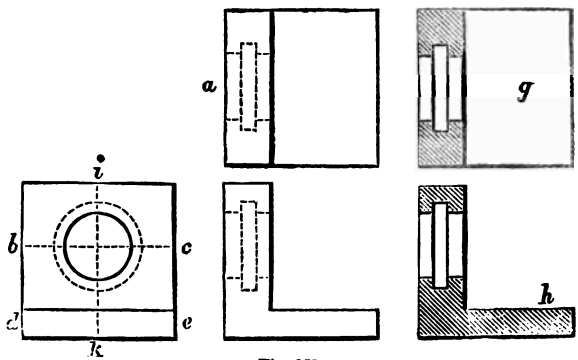

Fig. 151.

part *g* is seen projecting beyond the sectional part, being a plan of the base adjoining. In actual working drawings for factory use it would not be necessary to show it, if the sectional part only was required. If the dimensions of *g*

were really required, it can be got from the sectional elevation at *h*, and in front view from the breadth *d e*; the sectional plan shown at *g* being through *b c*, and the longitudinal section at *h* through *i k*.

In some cases dotted lines suffice to show an internal part, as in the three views of the objects shown at Fig. 151, if the drawing is merely an outline; but it is more satisfactory to have it in section, as shown at *g* and *h*. A pictorial drawing should never have dotted lines.

When all the necessary dimensions are carefully noted down in the sketch-book, and the paper stretched on the board ready for drawing on, the scale must be chosen to suit the number and size of the views to be drawn, and the dimensions of the paper to be drawn upon (though the former generally determines the latter). Find how much the entire length and height will occupy to the scale, allowing for the necessary space between each view to be drawn, so as to place the whole in the middle of the sheet, leaving an equal margin around, as described in the preceding chapter.

If instead of using the ordinary scales referred to in Chapter V., it is found more convenient to make a scale suitable for the required purpose, it is better, instead of making the permanent scale at first, to make it on the margin of the sheet on which the drawing is to be made, as it has to undergo a good deal of tear and wear from the compasses; and when the drawing is finished a scale can easily be copied from the margin scale into its proper place on the drawing. In making such scales to any part of a foot, for instance a scale of a quarter of an inch to the foot, it would not be so correct to take a quarter of an inch by the compasses from the foot rule to divide the scale line into the number of feet required. Supposing 20 feet are necessary to the scale line, it is the more correct way to mark off the whole measure for 20 feet, or 5 inches, and to divide this into five equal parts, and these again into four equal parts or quarters of an inch—the whole will then be 20 feet as required. A scale for a

plain engineering drawing should be one fine straight line divided into the required number of feet, leaving the inches clear of the first foot and shown to the left, thus :—



Scale ½ inch = 1 foot.

Fig. 152.

The inch divisions at 3, 6, and 9, should project up a little beyond the intervening inches, as it facilitates taking a measurement in inches.

It is better to say how much the scale is to the foot, underneath it, when it is to any known part of a foot, which it is better to be, as the foot rule can be applied to any part of the drawing of greater length than the scale attached to it.

In taking a measurement by the compasses from the scale, they should be opened sufficiently wide, so that when one leg point is put on the division for feet the opposite leg is closed to the inches; this being more convenient than opening them to the exact divisions of the scale. (See Scales, Chapter V.)

To find the centre line of cylinder and fly-wheel shaft in a beam engine.

Let the horizontal line *c e c*, Fig. 153, be the centre line of beam or lever when at half stroke—and *e* the centre. With the half length of beam *e c*, and from *e* as a centre, describe the radius *f c g* at each end, as shown; set off the extremities of the stroke or *vibration* of beam at *f* and *g*, a half on each side of centre line *c e c*, and join *f g* by a vertical line, intersecting the horizontal line *c e c* at *i*; bisect *c i* at *d*, and through the point *d* draw the vertical line *d k*, which will be the centre lines of cylinder and crank shaft.* To find the position of crank at half stroke.—With half stroke (or distance *i f*) as a radius, and on the line *d k*,

* The centre of shaft is sometimes placed vertically from the end of lever.

from l as a centre, describe the circle n—indicating the path of crank. The length of the connecting rod is taken from the point c to the centre of shaft l. With the radius $c\ l$

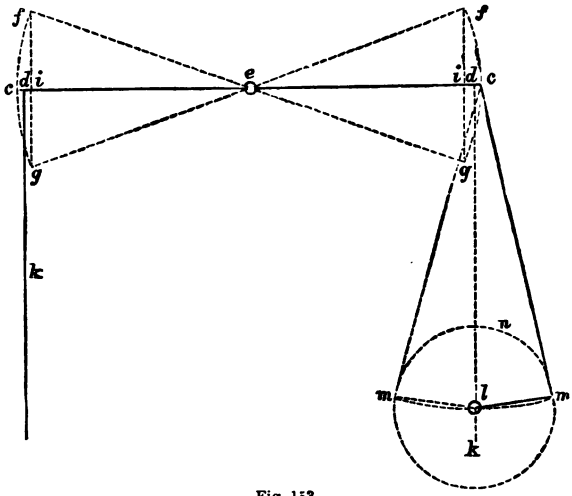

Fig. 153.

describe the arc $l\ m$, cutting the circle n at m, and join $l\ m$ by a straight line, which will be centre line of crank at either side of the shaft, when the lever is at half stroke.

In condensing engines the centre of air-pump is found by describing an arc from e as a centre, through the given centre for working the pump, on lever between e and c, in the same manner as for the cylinder centre line. In marine side-lever engines the annexed diagram applies equally, the lever being placed below the crank being the only difference. The position of the crank of an oscillating, or of any description of connecting rod engine at half stroke is the same.

The civil architecture most frequently adopted in framework and columns for engineering purposes are the Tuscan, Grecian, and Roman Doric orders.*

Regular mouldings are eight in number, and are named—

* For examples of which, with their proportions, see Appendix, Part I.

the Fillet, or Band, the Torus, the Astragal, or Bead, the Ovolo, the Cavetto, the Cyma-recta, the Cyma-reversa, or Talon, and the Scotia.

The Fillet, *a*, Fig. 154, is the smallest rectangular member



Fig. 154.



Fig. 155.

in any composition of mouldings. When it stands upon a flat surface its projection from the surface is generally made equal to its height. It is frequently employed to separate other members.

To describe the Torus, Fig. 155, let *a b* be the vertical diameter from which the Torus projects; bisect *a b* in *c*; from *c*, with the radius *c a* or *c b*, describe the semicircle *b d a*, which will be the profile of the Torus. This is surmounted by a fillet *b e*, and being of a rope-like shape (like the Astragal) is intended to bind and strengthen the parts to which it is applied.

The Astragal is described in the same way as the Torus, the only distinction between them being that, when employed in the same order, the Astragal is smaller than the Torus. The latter is generally employed in the bases of columns, the Astragal both in bases and capitals.

The Roman Ovolo consists of a quadrant or a less portion of a circle, and is described at A, Fig. 156, the height and projection being given. First, let the height be equal to the projection, draw *a b* equal to the height, and *b c* at right angles with, and equal to, *a b*, for the projection. The quadrant *a c* described from the centre *b*, with a radius *b a*,

or $b\,c$, is the contour of the Ovola. But when the projection is less than the height, as in B, draw $a\,b$ and $b\,c$ as before, at right angles, $a\,b$ being the height, and $b\,c$ the projection. From the point a draw an arc of a circle $b\,d$, with the radius



Fig. 156.

$a\,b$, and from the point c, with the same radius, describe another arc, cutting the former arc at d; the point d is the centre from which the Ovolo is to be described, with the radius $d\,a$ or $d\,c$.

The Greek Ovolo, Fig. 157, unlike the Roman Ovolo, cannot be described by means of circular arcs, but must be described by finding a number of points in it. For this purpose draw the line $a\,c$ from the lower extremity a, indicating the inclination of the curve at that point; draw also the vertical line $d\,b\,c$ through the extreme point b, or projection of the curve. Draw $b\,e$ parallel to $c\,a$, and $a\,e\,f$ parallel to $c\,b$; make $e\,f$ equal to $a\,e$; divide the lines $e\,b$ and $b\,c$ into the same convenient number of equal parts; draw straight lines from the point a to the points of division in $b\,c$, and similarly, draw straight lines from the point f, through the points of division in $b\,e$, meeting successively

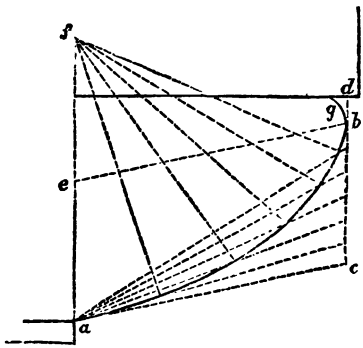

Fig. 157.

the lines drawn from *a* to *b c*; the points of intersection of the pairs of lines thus drawn will be as many points in the contour of the moulding, and a curve line drawn so as to embrace these points will be the greater part of the contour.

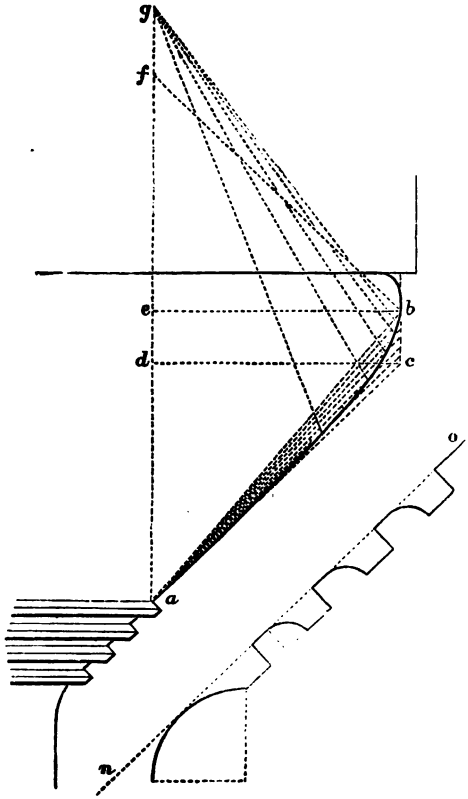

Fig. 158.

The remaining part *b g*, if required to be determined in the same manner, may be found by drawing lines from *a* instead of *f*, through the points in *b e*, and from *f* to *b d*, instead of from *a* to *b c*; of course this will give a good deal more of the curve than is necessary. The curve drawn in this

manner is a portion of an ellipse, somewhat greater than a fourth of the whole circumference. The recess of the moulding, *b g d*, at its projecting point is denominated a *quirck*. Fig. 157 is from its great projection relatively to its height, adapted for capitals of Doric columns. With less projection it would be suitable for entablatures.

To describe the hyperbolical Ovolo, Fig. 158, as employed in Doric capitals; having given the projection *b* of the curve and the lower extremity *a*. Draw the line *a c* in the direction of the lower end of the curve, and *b c* vertically through the point *b*; draw *a g* vertically from *a*, and *b e* and *c d* perpendicular to *a g*; set off *e f* equal to *a d*, and *e g* equal to *a e*; join *b f* and divide *b f* and *b c* into the same convenient number of equal parts; draw straight lines from *a* to the points of division in *b c*, and also straight lines from *g* through the points in *f b*; the successive intersections of these lines, as in the foregoing case, are the positions of as many points in the contour. This is the general form of the Ovolos in the capitals of the Grecian Doric. It will be seen that the lower part towards *a* is nearly straight, and is succeeded by four fillets, shown in section on a large scale, and rounded away on the under sides into the fundamental line *n o*.

The Cavetto, Figs. 159, 160, 161, is the reverse of the



Fig. 159.



Fig. 160.

Ovolo, and both in regard to form and to the weakness of the extreme parts, is well adapted for purposes of shelter for the other members. It is always employed as a finishing, and is

applied where strength is required. It is never used in bases or capitals, but frequently in entablatures; thus, in the Roman Doric order, it forms the crowning member of the cornice, and is evidently employed to overhang and shield the under members.

The Cavetto is described in the same way as the Roman Ovolo, by arcs of circles, which may be either full quadrants or less. The Greek Cavetto, Fig. **161**, is somewhat elliptical, and may be described by a combination of two circular arcs, thus: Let *a b* be the projection of the moulding, and *a c* the vertical line; from the point *b* draw *b d* vertically from *b*, and make it equal to *b e*, which is two-thirds of *b a*; from the centre *d* describe the arc *b i*; draw *i n* perpendicular to *e i*, make *n o* equal to *n i*, draw *o p* perpendicular to *a c*, and meeting *e d* produced in *p*, and from the centre *p* thus found describe the arc *i o*. The contour *b i o c* will represent the Greek Cavetto.



Fig. 161.

The Conge or Scape, Figs. 162 and 163, is a species of Cavetto, and is not recognised as a distinct moulding. In section it is partly concave and partly straight, the latter being vertical. It is employed in the columns of some of the orders, for joining the capitals and bases to the shafts. Let *a b*, Fig. 162, be the projection of the moulding from the vertical line *a e*, which it is required to touch; and first, if the projection *a b* is equal to the height of the curve, make *a c* equal to *a b*; and from the points *b* and *c* as centres, with *a b* or *a c* as a radius, describe the arcs intersecting at *d*; from *d* with the same radius describe the arc *b c*, which will complete the contour of the Conge. Or the centre *d*

may likewise be found by drawing *b d* vertically, and making it equal to *a b*.

If the Conge contains less than a quarter of a circle, as in Fig. 163, let *b e* be the tangent to the curve at the point *b*; on the vertical *a f*, set off the distance *c d* equal to *c b*; draw



Fig. 162.



Fig. 163.

b e at right angles to *b c*, and *d e* at right angles to *c d*; from the point *e*, as a centre, describe the arc *b d*, which will complete the contour of the moulding *b d f*.

To describe the Roman Cyma-recta, or Ogee, Fig. 164, join the point of recess *a* to the point of projection *b* by the line



Fig. 164.



Fig. 165.

a b; bisect *a b* in *c*; with the distance *b c* from the points *c*, *b*, describe the intersection *e*; and from the points *a*, *c*, with the same distance, describe the intersection *d*; from *d*, with the

distance *d a* or *d c*, describe the arc *a c*; and from *e*, with the distance *e b* or *e c*, describe the arc *b c*; and *a c b* will be the contour of the Cyma-recta required. The projection of the upper end of the curve over the under, as *n b*, Fig. 164, is generally equal to the height of *a n* of the moulding. If the curve is required to be made rounder, we have only to use a less radius than that of *a c* or *c b*, in order to describe the two portions of its contour.

The same description applies to the Cyma-reversa, Fig. 165, letter for letter.

The Greek Cyma-recta is little different from that just described, except that its projection over the under fillet is less than that of the latter, and that its curvature is also less.

The nature of the Greek Cyma-reversa, or Talon, is represented in Fig. 166. To construct the moulding, join the points *a b*, the extremities of the curve; bisect *a b* at the point *c*; upon *b c*, as a diameter, describe the semicircle *c d b*, and on *a c* describe the semicircle *a e c*; draw perpendiculars *d o* and *e f* from any number of points in *b c* and *c a*, meeting the circumferences of the semicircles; from the same points draw a series of horizontal lines, as represented in the figure, equal in length to the corresponding perpendiculars, *o n* equal *o d*, *f e* equal to *f g*, &c. The curve line *b n c g a*, drawn through the extremities of the lines, will be the contour of the moulding.



Fig. 166.

The curve might be made flatter by using arcs of circles of a greater diameter than *a c* or *c b*, as the height, *o d*, of the arcs would not be so great as it is in the figure. This will be exemplified in describing Fig. 169 following. If the upper part *b n c* be required to be larger than the under part

c a, of the contour, this may be effected by shifting the point *c* nearer to *a* before drawing the circular arcs.

The Cyma, like the Cavetto, is always used as a finishing, and never applied when strength is required.

To describe the Scotia, Fig. 167, *the extremities* a *and* b *of the curve being given.*—Draw the perpendicular *a c*, then *b c* is the projection of the curve or moulding; draw the perpendicular *b e;* add one-half of *a c* and two-thirds *b c* into one length, which set off from *b* to *d*; from the centre *d*.



Fig. 167.



Fig. 168.

with the radius *b d*, describe the semicircle *b f e*; join *e a*, and produce it to *f*; then join *d f*, cutting *a c* in *g*; from *g*, as a centre, describe the arc *a f*; this arc, in conjunction with *b f*, forms the contour, *a f b*, of the Scotia.

Another mode of describing the Scotia is shown in Fig. 168. Join *a* and *b*, and bisect *a b* in *c*; draw *e c d* horizontally, and make *c d* equal to the required recess of the curve, and *c e* equal to *c d*; draw *f d g* parallel to *a b*; divide *a f* and *a c* into the same convenient number of equal parts, and to the points of division in *a f* draw straight lines from *d*; draw also straight lines from *e* through the points in *a c* till they meet successively the lines drawn to *a f*. Having performed the same operation on the upper side, the series of inter

sections thus found are points in the curve, and by drawing a line through them the contour will be obtained.

In Fig. 169 a method is given somewhat similar to that used at Fig. 168. Join *a b*, upon which describe the semicircle *a d b* from the centre *c*; draw a series of lines perpendicularly from *a b*, meeting the circumference *a d b*; draw also a series of horizontal lines from the same points in *a b*, as shown in the figure, making these lines equal to the corresponding lines in the semicircle, *c e* equal to *c d*, &c.



Fig. 169.



Fig. 170.

The extremities of these lines will be as many points in the curve. If the recess of the curve is required to be less than *e c*, as, for instance, *c n*, then set off *c o* equal to *c n*, and describe an arc *a o b* from the centre *i*. By the method in the former case we find the contour *a n b*.

The mode first described, to produce a graceful contour, should be confined to medium proportions. For example, in Fig. 167 the projection is two-fifths of the height.

To find the gradation of the flutes on the elevation of fluted columns.

Firstly. When the column is parallel.

Let A, Fig. 170, be the elevation, having its opposite sides parallel. On its centre line *n*, and with a radius

equal to half diameter of column, draw a half-plan B, (a half being sufficient for the purpose). Divide this semicircumference into the required number of flutes, *r*, *s*, *t*, &c., and from these flute points draw the vertical lines *e*, *f*, *g*, &c., in elevation of column A. In making the plan of the flutes, describe the arcs as at *c*, *m*, &c., with the same requisite radius from each division on the circumference, and from the intersections *c*, *m*, &c., describe the circle of flute as at *d*, *k*, &c., between each of the divisions.

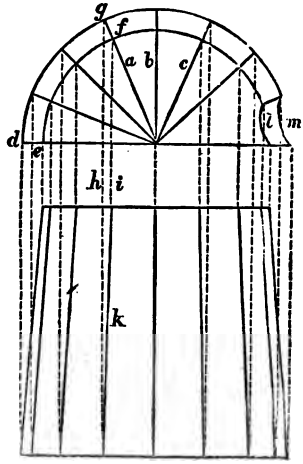

Fig. 171.

SECONDLY. When the column is tapered, Fig. 171.

Draw the half-plan of top and bottom of column as at *e* and *d*, divide the larger semicircle *d* into the required number of equal parts for the flutes, and from which divisions draw to the centre the radial lines *a*, *b*, *c*, &c., and which will divide the lesser semicircle *e* at the same time, and from the points *f* and *g*, where the radial lines intersect the circles, draw vertical lines as at *i* and *h*, &c., which will give the points on top and bottom of elevation, between which, when the lines *k*, &c., are drawn, will be obtained the elevation of the flutes as required. A plan of a tapered fluted column, when divested of initial circles *e*, *d*, and radial lines *a*, *b*, *c*, &c., will be as represented in part at *l m*.

THIRDLY. When the column is barrelled, Fig. 172.

The process is somewhat similar, only the elevation A must be divided into a number of horizontal parallel lines *a*, *b*, *c*, &c., to represent the different diameters, and which are necessary for intersectional points. In the half-plan B draw the semicircles equal to the diameters *a*, *b*, *c*,

&c., on elevation, and as indicated by the dotted vertical lines *d*, *e*, *f*, &c. The lines at *g h* being squared down from the points where the radials cut the respective circumferences to the horizontal lines *a*, *b*, *c*, &c., on elevation A, give the several points for the curve. The process is the same at each radial line, giving the curve points for each flute in elevation. The curves are drawn in by the moulds described in Chapter IV.

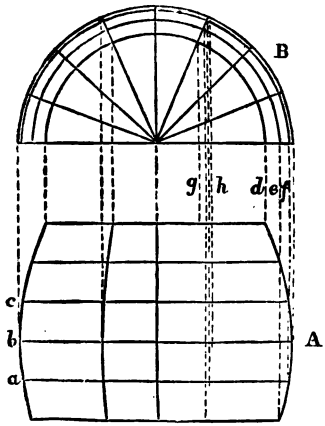

Fig. 172.

In the diagrams just described the figures are exaggerated in their proportions in order to render the process more distinct.

Wheel Work.—In drawing the plan or end view of a spur wheel, Fig. 173, the process is the same as at Fig. 170.

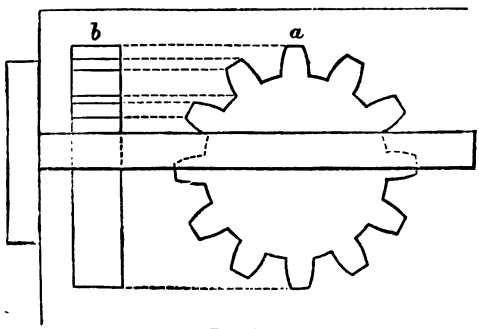

Fig. 173.

The T-square is placed at the several points of the teeth in view *a*, and the horizontal lines drawn in the end view *b*, as shown in diagram. In spur wheels and pinions the diameter (as has been said elsewhere) is always taken

at the *pitch line*, *a*, Fig. 174, which line runs through the broadest part of the upper halves of the teeth, and is coincident with the line of contact with the wheel or pinion with which it is intended to work. The distance between the centres of each pair of teeth *b c*, *c d*, &c., is measured on this line, and is called the *pitch*. The form of tooth, though variable, is usually similar to that shown in diagram Fig. 174. Having divided the pitch line into the number of equal divisions for number of teeth, and the half breadth of the tooth having also been marked off on each side



Fig. 174.

of its centre on the pitch line, with the radius *c g*, and from *c* as a centre on every tooth, describe the arcs *g* and *i*, which give the form of the lower part of the teeth; then with the radius *c e*, with *c* as a centre on every tooth, describe the arcs and *f*, which give the form of the upper part of the teeth. The pitch line being kept nearer the outer edge than the middle of depth of tooth, gives a broader base to them for strength. In proportioning the teeth of wheels, the application of the following rule has been found in practice to work well:—

Depth from point to pitch line . .	$5\frac{1}{2}$	parts.
,, pitch line to root of tooth	$6\frac{1}{2}$	,,
Whole depth of tooth	12	,,
Working depth	11	,,
Thickness of tooth	7	,,
Width of space	8	,,



Fig. 175.

If a plan *a* as well as a front view *b* of a spur wheel is required (Fig. 175); having once found the front view of the teeth at *b* from a face view *c*; it is unnecessary to repeat the process by drawing a temporary face view of wheel opposite *a* for again finding the lines of teeth, the lines can be easily

marked off from *b* on the straight side of a slip of thin paper and transferred to the view at *a*.

Bevel wheels and pinions and mitre wheels, the latter being two of the same diameter working together, are simply frustrums of cones, the line of contact of teeth of either class terminating in the same centre or apex, as shown in Figs. 176 and 177, the former showing wheel and pinion, greater and



Fig. 176.



Fig. 177.

less, and the latter mitre wheels. In either case a good deal of care has to be exercised in projecting the teeth properly.

It is easier to draw a pair of mitre wheels in gear, than bevel wheel and pinion, as one face view of one of the former serves to project the teeth for the other of the same size working into it; but in the latter a face view (or half, which is sufficient) has to be drawn of both wheel and pinion. In every case where side views only are shown, the teeth can only be projected from a face view, even though it has to be effaced again after the operation. As the process is the same for each of these classes of wheels, the explanation of the subjoined diagrams, Figs. 178 and 179, of mitre wheels will be sufficient.

1. Having determined the diameter of pitch line, draw a vertical line—on which set off the diameter A B, Fig. 178, bisect A B in *c*; from *c* as a centre, and with radius *c* A or *c* B, draw the circle or pitch line A *d* B *e*.

2. Through *c* draw the centre line *d e* at right angles to A B.

3. Draw the vertical tangent line fg of a length equal to A B, and which will be one pitch line of side view.

4. Join, by straight lines, fc and gc, which will form the

Fig. 178

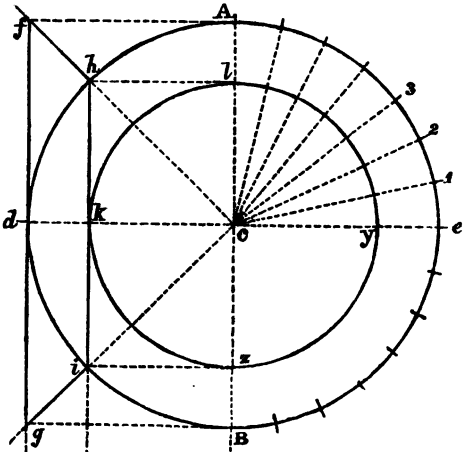

Fig. 179.

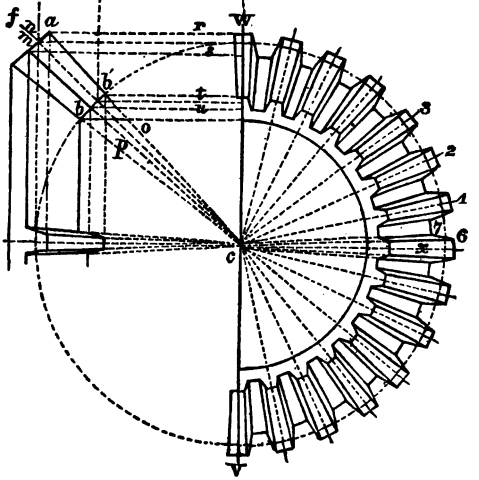

sides of the cone, or the angle of line of contact of the teeth.

5. Having fixed on the length of teeth fh, draw the line

h i parallel to *f g*. This line will be the pitch line of teeth at inner diameter of side view of wheel; and through the point *k*, where it cuts the centre line *d e*, and with radius *c k*, draw the inner pitch line circle of face of wheel *k l y z*.

6. Having fixed on the dimensions of teeth, space, and pitch; on the greater pitch line A *d* B *e* pitch off the centres of teeth as at 1, 2, 3, &c., and through these centres draw the radial centre lines of teeth *c* 1, *c* 2, &c.

7. On line *f c*, Fig. 179, corresponding to the line *f c* in Fig. 178, mark off the length of tooth *a b*, draw in the ends at right angles to the line *f c*, on either side draw in the depth of tooth *m n*, and from the top and bottom points draw the radial lines *p*, *o*, to the centre *c*; from the same points draw the horizontal lines *r*, *s*, and also the lines *t*, *u*, from the points *b′b* to the vertical centre line w v of face of wheel, and from *c*, as a centre, describe the semicircles corresponding to these half-diameters *c r*, *c s*, *c t*, and *c u*, which will give the face view of the line of top and bottom of teeth.

8. On face view, from radial line mark off the half thickness of tooth on each side at pitch line,* and at top and bottom of outer end of each tooth at 6 and 7, Fig. 179, on the circles corresponding to *r* and *s*.

9. From these points draw in the radial lines towards the centre *c*, into which centre, with great advantage, a fine needle may be put to bear the front of straight-edge, and thus complete the sides of teeth as at *x*. The points for the smaller ends of the teeth will be found from the radial lines cutting the respective inner circles. The side view of tooth at *m* being simply drawn in to assist in finding the diameters of the circles in face view, will be almost hidden by the other teeth when all are projected back from face view.

Having drawn in the body of side view of wheel on which the teeth are to be projected from face view, and the line of top and bottom at each end of teeth as at *a b c d*, Fig. 180,

* When of the curved form to a large scale.

square the points *e f* and *p o* on face view to *g h* and *i k* on the vertical lines of side view, and join *g h* and *i k*. The lines

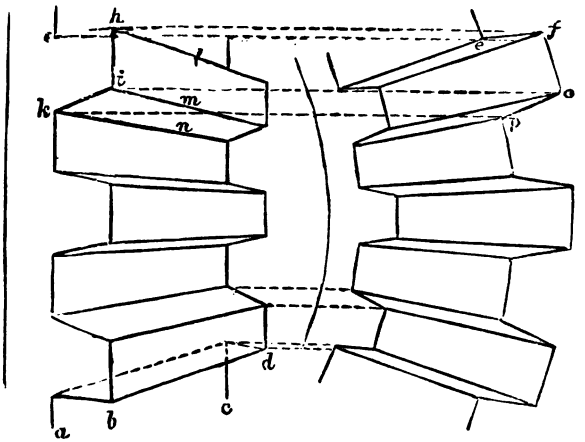

Fig. 180.

l m n, drawn from the points of large end of tooth *h i k*, and from the corresponding points on every tooth, are all radiated to the same centre, as were the centre lines and sides of teeth in face view, the points for the inner ends of the teeth, as already referred to, finding themselves both in face and side view. As the process is the same in each tooth as in that just described, the one definition, with the aid of the dotted lines as shown in Fig. 180, and with an example drawn in fully as at Fig. 181, will be found sufficient. If a face view is not required, but only a side view, then the four points *e f o p*, Fig. 180, of each tooth are all that are necessary in a temporary face view from which to draw in the teeth of the side view.

If the face view is to be shown in conjunction (or *geared*) with a side view, and not two side views, then the teeth which were first drawn in on the face view for projecting the side view must be drawn in where the spaces were between each tooth for the finished drawing of such face

view; if drawn in as at first projected for finding the points for the teeth in the side view, it would not present the spaces for the teeth of side view of wheel to work in. The relative change in position of teeth will be observed in the diagram of mitre wheels at *a*, Fig. 181, they having the same diameter and number of teeth as in diagram Fig. 179.

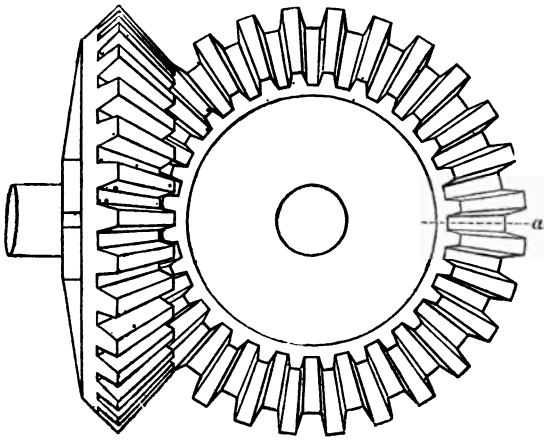

Fig. 181.

If only two side views and no face view is required, having found one side view from the points on the latter (temporarily drawn for the purpose), such points from the one finished side view can be transferred on the straight edge of a strip of thin paper to the other side view to be drawn. It would look more uniform to have a tooth exactly in the centre, which must be arranged at the beginning of the process. In projecting the teeth on side view as in Fig. 180, the points should be found and the teeth drawn in on each side from the centre outwards, as they gradually conceal each other in receding from the centre. By observing this, much rubbing out of useless lines will be avoided.

In drawing mitre or bevel wheels in an oblique position,

much the same process as that just described is applicable; with this difference, that the circles when viewed in their obliquity are ellipses, and which the following diagram, Fig. 182, will further explain.

A is a side view of the wheels (the teeth being drawn in complete in each, from a face view, as previously described). Directly over A is the required view B. (To find the ellipses, see diagram following, Fig. 183.)

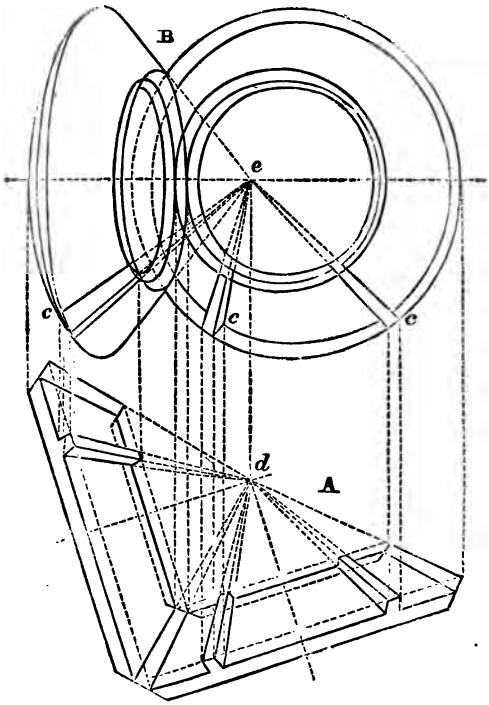

Fig. 182.

The several points of the teeth as at *c*, *c*, in view B, on their corresponding circumferences (the ellipses) are set off vertically from the several points of the teeth in view A; vertically, also, over the point *d* on horizontal centre line of

wheels B is the point *e*, to which all the lines are drawn from the several points on the ellipses in both wheels, and as described at Fig. 179.

It is a convenient and more correct method, where the teeth points come closer together towards the edges of the wheels A, to have the side view of the wheels set off vertically at either side of view B (or a face view would be equally suitable) for laying off the points horizontally on the right and left sides of the ellipses.

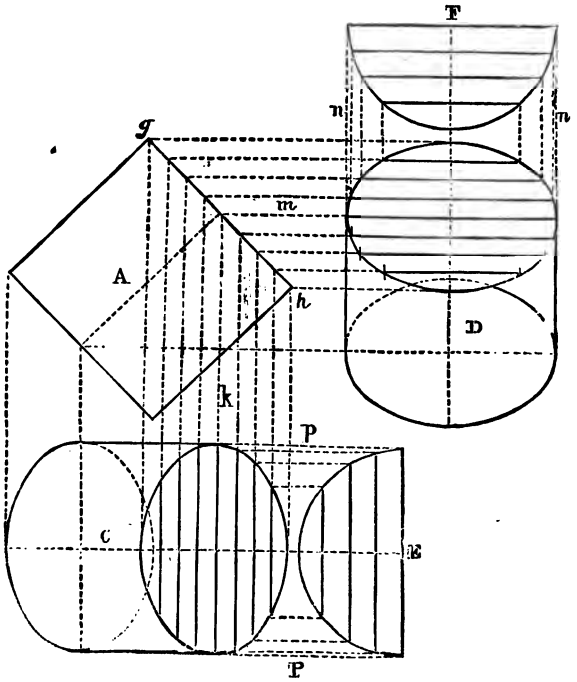

Fig. 183.

To draw the plan, or front view of the end of a cylinder lying obliquely, such as in those of oscillating engines.

Draw a side view A of the cylinder, Fig. 183, at its re-

quired inclination, and at a convenient distance from the required position of the plan C or front view D.

To find the points of the ellipse; on the centre lines of C and D, draw semicircular plans E and F equal to diameter of cylinder opposite each view C and D; divide the line *g h* on side view A into any number of equal parts, and divide E and F into the same number of equal parts of equal widths with the other, as represented by the parallel lines in each; from the points on the line *g h* on side view A draw the vertical lines *k* to C on plan, and from the points where the parallel lines intersect the semicircle E draw the horizontal lines *p p*, cutting the vertical lines *k*. A curve line drawn through the intersectional points will give the plan of end lying obliquely as required.

From the same points on *g h*, on side view A, draw the horizontal lines *m* to D, or front view, and from the points where the parallel lines intersect the semicircular plan F draw the vertical lines *n n*, cutting the horizontal lines *m*. A curve line drawn through the intersectional points will give the front view of end lying obliquely as required. The curves at the opposite ends in each view are the same. In drawing the lower ends of such cylinder, a pencil tracing of the curve found for one end can be transferred to the other end of the same view by turning the tracing upside down, taking care that the centre lines, which must be put on such tracing, come exactly over the centre lines of the curve to be drawn. If the back of the pencil curve on the tracing is gone over with a fine-pointed pencil, it will leave a sufficiently clear line to ink it in by, and save repeating the process just described twice over. Indeed, in all curves where both sides are alike, if one-half only is found and traced, this method saves time by rendering points for both sides unnecessary.

NOTE.—In any diagrams such as that described, it is not absolutely necessary that the parallel lines referred to in the semicircular plans E F should be equidistant, only that they

should agree in each relative view or plan. It is usual to make them equidistant, as it is more symmetrical, and in one sense easier, one width in compasses serving for the whole.

It frequently occurs that in oscillating engines the slide valve casing is to the right or left of centre of front of the cylinder. The projection in a front view for an inclined position is found in a similar manner to that when such object is in the centre of the cylinder.

Let A, Fig. 184, be the front view of the cylinder on which the object is required to be projected. Draw a plan B, of

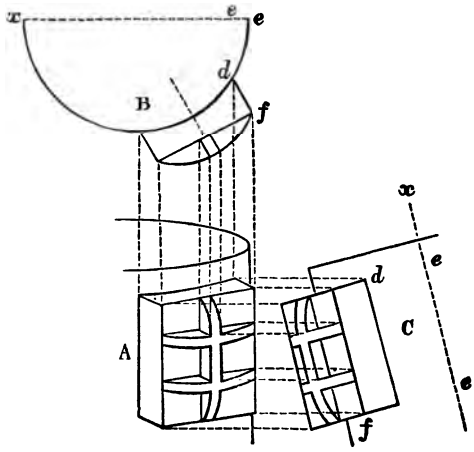

Fig. 184.

the object in its position, also a side view C, of the object at its required inclination, the distances *e d* and *e f*, &c., in such side view C, corresponding to the distances *e d* and *e f*, &c., in plan B, each being measured from and set off at right angles to the respective centre line *x e*. From the several points of the object in side view C draw the horizontal lines as shown (dotted) to front view A; also the vertical lines as shown (dotted) from the several points of the object in plan

B, to front view A. Their intersections with the horizontal lines from C will give the points of projection for the object on front view as required. If the cylinder and casing were in a vertical position, the plan B only would be necessary, as the heights of required object would be set off on the front view, instead of on a side view, as at C, when inclined.

Other objects under similar circumstances would be projected in the same manner as that just described.

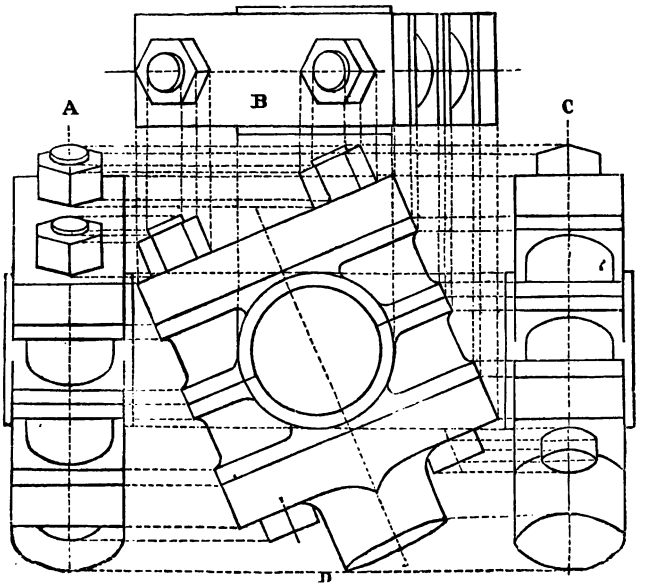

Fig. 185.

In drawing the front or back view, or plan of the engineering detail, shown in accompanying diagram, Fig. 185, when the object is lying obliquely, the points for such views have to be projected, as in similar cases, from another view than any of those named, even though it has to be effaced again after such process, if not required for the drawing. The view required for finding the points of those in Fig. 185, at

A, B, or C, would be a side view, as shown at D. Such views as A, B, and C have their right breadths or thicknesses put exactly on them throughout. The dotted lines will be quite sufficient to show without further explanation how the oblique positions of the parts in the several views are found, the lines from the central figure D to the views on right and left of it being horizontal lines, and those upwards to the plan B being vertical lines, or at right angles to the right and left horizontal lines.

To find the curve at either end of the side view of a crank web.



Fig. 186.



Fig. 187.

Let A, Fig. 186, be a part of the side view of a crank. Draw a corresponding part B, of plan of crank. From the centre K of crank eye, with any radii (so that it is on the curved part of web), describe the arcs, as at *c h*, &c.; from *c* draw a vertical line, cutting the profile of curve at *f*; from the point *f* draw the horizontal line *f g*; and from the point *h*, where the arc *c h* cuts the side of the crank web, draw down a vertical line, cutting the line *f g* in *i*; *i* will be one point for the required curve. Repeat the process from any other arcs, as from *d*, &c., which will give other points for the curve required. The same process is applicable to the ends of rods where they change from the circular into the flat butt, as shown at B and A, Fig. 187, giving plan and side view.

In projecting rivets of the conical form on the side view or plan of a round boiler, the process is similar to that for finding the points at Fig. 173. The rivets, other

than those immediately in front of the observer, where the diameters are seen equally, as they recede, appear elliptical; the horizontal diameters* are all of the same breadth, their diminishing diameters being in the vertical direction.

Let A, Fig. 188, be a side view of the object referred to. Draw part of an end view B, of outline of boiler, on which to pitch off the rivets at their required distances; also a longitudinal section, C, on which to project the heads of the rivets in interior view, each view in a direct line with exterior side view A.

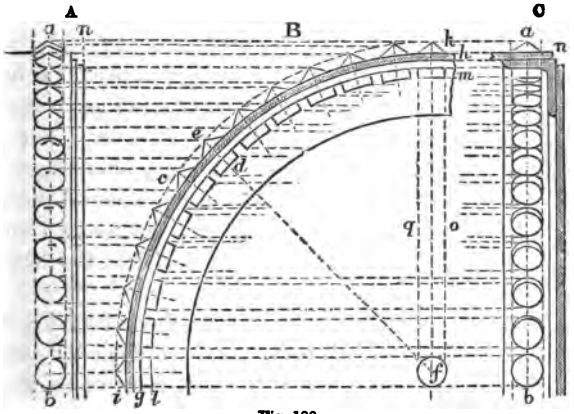

Fig. 188.

The rivets on end view (or section) B having been equally divided from centre to centre, draw a centre line through each point as shown at *e f*, the point *f* being the centre of the circle or quadrant *g h*. Set off the height of a rivet outside, and thickness of a rivet head inside of section B, and draw the circle *i k* passing through the point of height of rivet, and which, cutting all the radial centre lines, will set off the height of each rivet at one operation for outside, and the inner circle *l m* for the thickness of heads inside. Take the half diameter of bottom of rivet (or the base of the

* Supposing the views referred to are drawn horizontally as in diagram.

cone), and lay it off on each side of its centre line. Draw the sides of each rivet from these points of its diameter at base to the point of its height already found by the circle *i k* cutting the radial or centre lines. For the head, lay off each half diameter, *a c* and *a d* (as shown on a larger scale at Fig. 189), from their centre lines *i k*. Draw lines *c e* and *d f* through these points and parallel to the centre line *i k*, or, in view B, from *f* as a centre, describe a circle equal to the diameter of rivet or head; and having set the parallel rulers to the centre *f* and centre line of rivet, draw the outer diameter of each rivet, as at *q o*, equal to the diameter of circle at *f*. The point *b*, Fig. 189, through which the circle passes (as already referred to), being the thickness of head from *a*. Set the parallel rulers to the points where the circle *l m* cuts the side lines of diameter of head *e f*, and draw the line *g h* through the point *b* parallel to *e f*, which will complete the head of rivet.



Fig. 189.

In views A and C, Fig. 188, the centre line *a b* having been drawn in vertically at its proper distance from the end *n*, set off the lines for the half breadth of rivet on each side of it, and square across the points from the top, bottom, and centre of each rivet from outside of view B, as indicated by the dotted lines *c*, to side view A, and from the heads inside at *d* to interior view C. For a drawing to a small scale it may suit the purpose to draw in the ellipses through the four points thus found for each rivet head by hand; but for a full-sized rivet, the process of drawing in the ellipses correctly requires further explanation, as more than one vertical and one horizontal diameter is requisite.

In Fig. 190 the process for finding the points of the ellipses (or bases) of the rivets as they recede is shown more distinctly by using a larger scale.

Let A be the side view, B the end view, and C the interior

view of the iron plating, of which the lines *d e* and *f g* in end view B represent the outer and inner surface.

As in the previous instance, draw in the form of rivet *l m n*, on end view B, and draw the lines for breadth (or horizontal diameters) of rivets *h i* on side view of plating A. Draw the semicircle *h k i* equal to the horizontal diameter, or breadth of rivets; divide *t h* and *t i* into two parts, it may be equal, or if nearly so, will suit the purpose, *t p* and *t r*

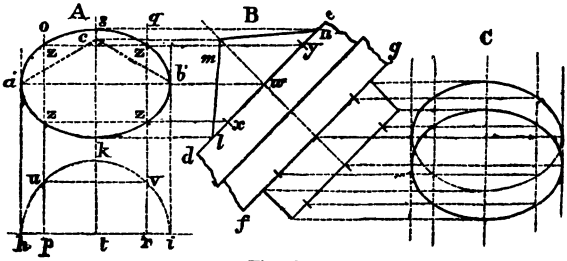

Fig. 190.

being equal; draw the vertical lines *p o* and *r q* (which will be parallel, of course, to the vertical centre lines *s t*), cutting the semicircle at *u* and *v*.

On end view B mark off the points *w y* and *w x* equal to *r v* on side view A; from the points *y* and *x* draw the horizontal parallel lines to side view A, and where the vertical lines *o p* and *q r* cut the horizontal lines from *y* and *x* at *z*, will give four more points through which to draw the ellipse than could be given in the small scale of the first diagram. The dotted lines *c a'* and *c b'* in view A indicate the centre line of the object viewed obliquely, and are found by drawing the horizontal lines from *m* and *w* respectively; no such lines, however, should appear in a finished drawing, the apex only being indicated by a point at *c*.* In each rivet the same process is applied. What has been already

* The natural form of such objects in a similar position is best shown by shading, in a shaded drawing. The same remark applies to the front view of the lower part of the stuffing-box of a cylinder cover, &c., lying obliquely.

explained in regard to the top of the rivet is equally applicable to the head, as shown at C, the dotted lines being presumed a sufficient guide, and the whole process being somewhat similar to that described at Fig. 188.

In the view B the lines *d e*, &c., are assumed for such short length of curve having a large radius to be straight lines, and which for all practical purposes would be sufficient; but in a *quick* curve, as in diagram D, Fig. 191, the following rule is observed:—

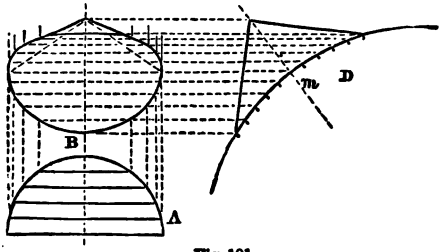

Fig. 191.

Divide the half diameter A by any number of horizontal divisions (equal being convenient), and with the same distance in the compasses from the centre line *m*, and on each side of it, on the curve, set off an equal number of divisions, proceed as shown in diagram, Fig. 188. The curve line B passing through the intersectional points will be the view required.

NOTE.—The curve is simply that of a circle bent round a cylinder; were it the curve produced by a regular cone (which that described is not), intersected by a cylinder at right angles to axis of cone, the process would be as follows:—



Fig. 192.

Through any point, *x* or *y*, Fig. 192, draw a straight line at right angles to centre line of cone *m*, intersecting the sides of cone at *a b*. At any convenient distance on centre line *m* draw a circle of corre-

sponding diameter to *a b* in section of cone; from the point *y* draw a straight line *y l*, parallel to centre line *m*, intersecting the circle at *u l*; *u l* will be the distance horizontally between two points of the curve relatively, as *z* in view A, Fig. 190.

To find the horizontal diameter at *w*.—Through the point *w* draw a line parallel to *a b*; the diameter will be the distance between the points of its intersection with the sides of the cone.*

In making a drawing of a six-sided nut, the half of diameter *a*, Fig. 193, is taken as a radius from the scale with the

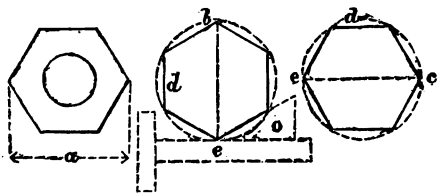

Fig. 193.

pencil-bows, and a circle drawn of the proper diameter. A vertical line *b e*, or horizontal line *e c*, is next drawn through the centre of the circle and depending on the position the angles of the nut are required to be shown; then, with half the diameter in the compasses, the circumference of circle is divided from *b*, *c*, or *e* into six equal parts, and between the points, the straight lines, as at *d*, &c., are drawn, completing the hexagon; or the T-square and angle of 30° may be employed (as indicated in the diagram at *o*), without dividing the circumference by the compasses.

The side view of the nut is completed as in subjoined diagram, Fig. 194, the dotted lines sufficiently explaining the different radii for the curves.

In drawing a side view of any object where a front view

* For a similar object on a larger scale more intersectional points than those given, as at *x* and *y*, would be necessary to insure correctness, and may be chosen anywhere in the curve.

is also given, as, for example, in Fig. 195, *a* is the proper position for the side of the nut, of which *b* is the front view. In the diagram adjacent to it the side view *c*, should never be drawn as shown, with its back turned on its front view *d*.



Fig. 194.



Fig. 195.

This principle holds good in all larger objects of the same kind, especially in finished drawings, and referred to previously in this chapter in regard to end views with elevations.

NOTE.—If a temporary plan, &c., is necessary simply for finding points in an intersection or other view, it is quite immaterial where it is placed, if it is in a position suitable for the required purpose.

INTERSECTIONS.—In the details of machinery there are numerous instances where one part appears to be fitted or mitred upon another, and sometimes one portion seems to be penetrated, or completely passed through by another. All such appearances of the interruption or penetration of parts by one another may be called the penetration of solids, and the lines of intersection where these solids meet and run into one another are the intersection of solids.

In a side view of such a common object in engineering as a round pipe joined at right angles, or square to another round pipe of the same diameter, the formation of the joining is an operation simple enough to perform, as it will

be a straight-line joint, as at *a* and *b* in each of the sub-joined examples shown in Fig. 196, and of which *d e f* are the respective plans. The diameters being alike, the points *c* terminate vertically and horizontally in the centre. But,

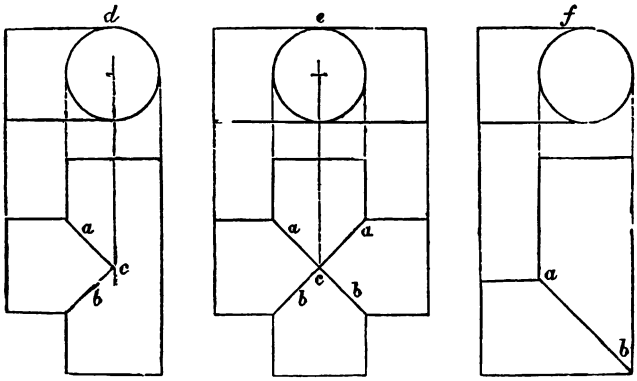

Fig. 196.

when a smaller cylindrical object is joined at right angles to a greater, as in Fig. 197, the operation is not performed with so much facility, as the joining in the side view is a curved line.

To find the intersectional curve of two cylinders of unequal diameters joined together at right angles.

Let A and B, Fig. 197, be the side elevation of the objects on which the curve is required to be drawn, and of which *c d* and *e f* are their respective centre lines. Draw a half-plan G, of the objects. On centre line *e f*, with radius equal to the half diameter of smaller cylinder B, and at any convenient distance from it, describe the semicircle H.

Divide the half diameters *e p* and *n m* into the same number of corresponding divisions as at 1, 2, 3, 4 and *l, k, i, g*. From the points *g, i, k, l*, draw horizontal lines to the circumference *z* of larger cylinder; from the points in the semicircle H, where the vertical lines 1, 2, 3, 4, intersect it, draw

the horizontal lines as at *w*; from the points where the horizontal lines from *g*, *i*, *k*, *l* intersect the circumference *z* of larger cylinder, draw vertical lines *x* intersecting the horizontal lines *w* at 5, 6, 7, &c., through which points draw the curve line *y*, which will be the intersectional curve required.

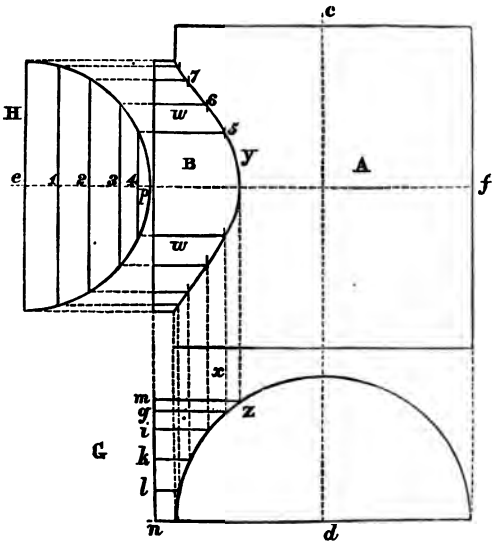

Fig. 197.

To find the intersection of a rectangular object with a cone, central and at right angles to the axis of cone.

1. Draw a vertical centre line, Fig. 198, on which set off the height of the object A; draw the horizontal lines for the ends of object, and on these lines set off the half of each diameter for each end from the centre line, as at *a b* and *c* (as described in Chapter XII.), and join *a c* and *b d*. Draw in its position, the depth of the rectangular part of the object *e f g h*.

2. At any convenient distance draw a horizontal line *v w*, as a centre line for the plan B of the object, and on which the halves of whole diameters or breadths are to be

laid off on either side of it. (An inverted plan will be more convenient for the required purpose.)

3. At the central point *z*, and with a radius equal to half of *a b*, draw the circle *n*, and with radius equal to half of *c d*, draw from the same centre the circle *o*—corresponding severally to greatest and least diameter of conical object.

4. From *z* as a centre, draw the dotted circles *q* and *r* of diameters corresponding to *l m* and *i k* of side view.

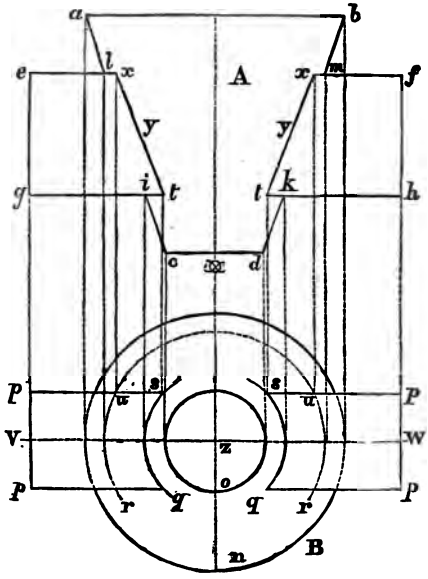

Fig. 198.

5. On plan B draw the breadth, or plan, of passages *p p*, and where the lines *p p* at inner ends cut the lesser circle *q* at *s*, it will give the point *t* on line *g h* on side view; and where the lines *p p* cut the greater dotted circle *r* at *u*, it will give the points *x* on line *e f* on side view.

6. Join *x t* by the lines *y*, which will be the termination or intersection of the inner ends of rectangular passages with

conical object, as required.* These points can be measured from their respective centre lines on either view, applying such measurement to the other; or by squaring them up or down with the T-square.

In engineering objects of a similar description to the foregoing, the object intersecting the cone is more frequently cylindrical than rectangular, and joined to the cone as in the

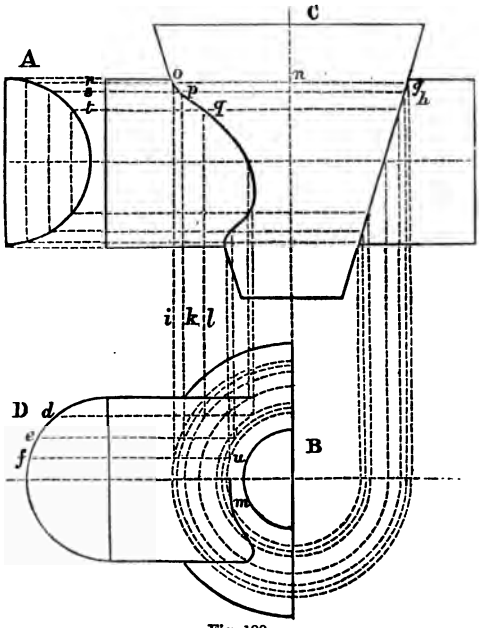

Fig. 199.

former case at right angles to its axis. The cone in accompanying diagram, Fig. 199, is enlarged, to render the process of finding the intersection, which is a curve, more distinct.

To find the curve.

1. Let c be the side view on which the curve is to be

* On a small scale the lines *x t*, for all practical purposes, may be drawn straight, the curve (which is hyperbolic) is so slight. See Chapter XI., Fig. 133.

drawn. Draw a half of front view A, of cylinder, also a half-plan B, of conical object inverted (the half of each of these being sufficient for the purpose).

2. Proceed exactly in the same way as in the case of the two cylinders (described at Fig. 197), but extend the horizontal parallel lines *r*, *s*, *t*, &c., from the points where the vertical lines intersect the circumference of front view of cylinder A, right across the diameter of cone to *g h*, &c.*

3. With the half *n g*, &c., of each of these diameters as a radius, draw the dotted circles in plan B.

4. For convenience, transfer front view of A to D.

5. Produce the parallel lines *d*, *e*, *f* in view D to the plan B, and from the points where they intersect their respective circles draw the vertical lines *i*, *k*, *l*, &c., cutting the corresponding lines of the diameters *g* and *h*, &c., at *o p q*, &c.; and having similarly found all the points on the respective diameters of the cone from the plan B, a curve drawn through them will be the required line of intersection.

In inverted plan B, a curved line *m*



Fig. 200.

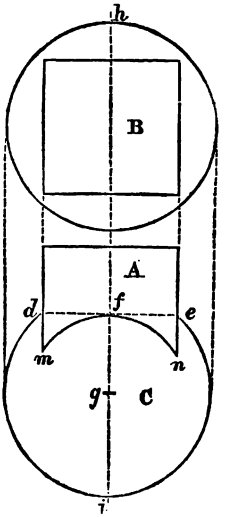

Fig. 201.

passing through corresponding points as those already found

* Or the lines in cylinder A may be drawn horizontally across, in which case, when transferred to position D, they would be vertical, or the reverse to that shown, the intersections producing similar results to that described.

on opposite side of centre line at *u*, &c., will be the inverted plan of intersectional curve.

In Fig. 200, the side view of a cylindrical object A joined vertically to a sphere B, the intersection is represented by a straight line *c d*.

In Fig. 201, the side view of a rectangular object A (and of which B is a plan) joined vertically to a sphere C, the intersection is represented by a part of a circle. To find which—

1. Draw in a centre line *h i*, and from the points *d* and *e*,

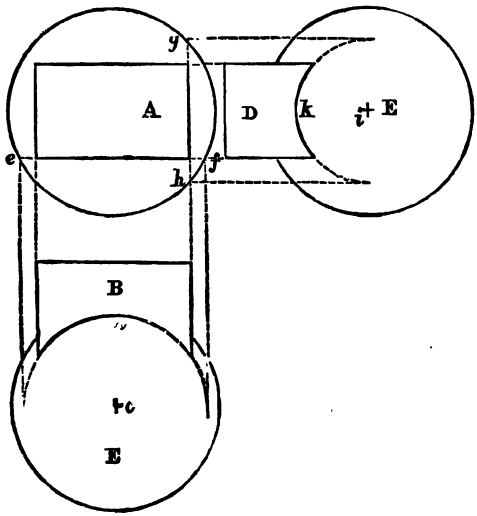

Fig. 202.

where the sides of rectangular object cut the circumference of the sphere, draw a horizontal line *d e*, cutting the centre line at *f*.

2. From *g*, the centre of sphere, and with the radius *g f*, describe the required circle *m f n*.

In Fig. 202, the side and end views of a rectangular object, of which A is a plan, B a side view, and D an end view,

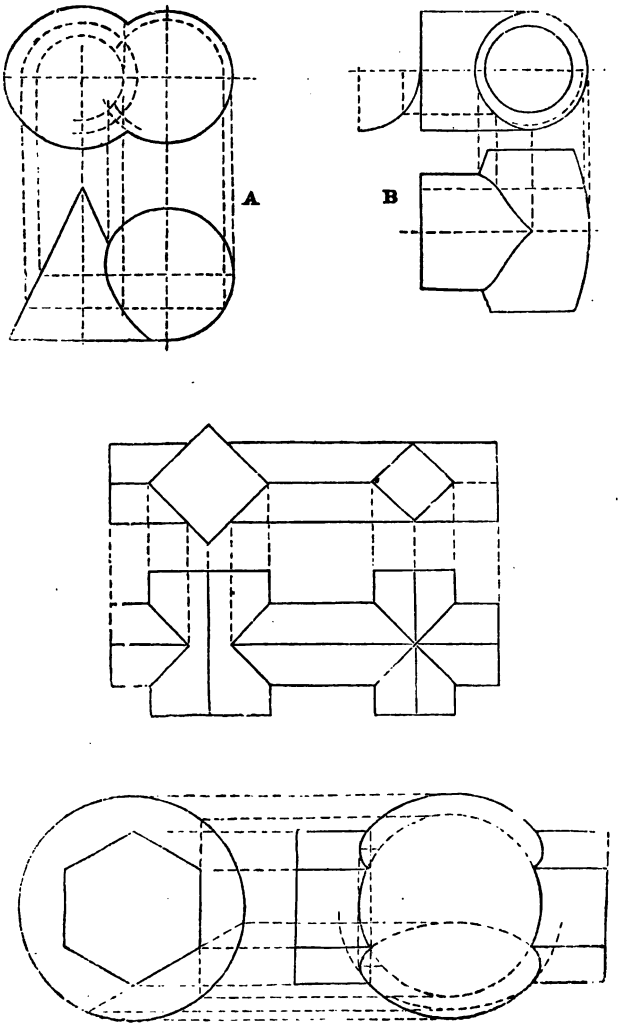

Fig. 203.

joined to a sphere E, and central on its axis, the intersection at such side and end view will each be part of a circle.

In side view B, the diameter of the circle required, of which *c m* is the radius, is equal to the diameter *e f*; and in the end view D, the diameter of the circle required, of which *i k* is the radius, is equal to the diameter *g h*, each described from the respective centres *c* and *i* of spheres E.

From what has already been described in the foregoing diagrams, it is presumed that in those which follow, in Fig. 203, the dotted lines will explain sufficiently. In the first diagram A (which is a cone intersected by a sphere), and in the second diagram B, additional sectional lines to those shown may be made, to render the curves of the intersections more accurate.

HELIX (OR SCREW).—*To find the points for drawing in the curve of a common square-threaded screw.*

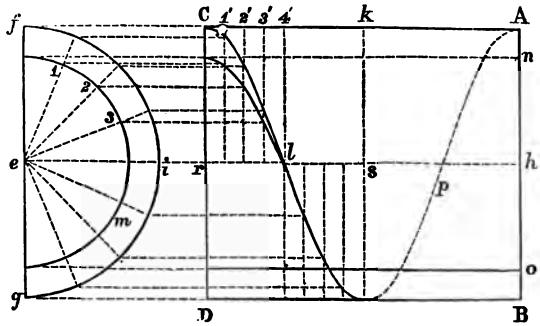

Fig. 204.

Let A B, Fig. 204, be the diameter outside the thread, and *n o* the inner diameter, C A the pitch (or the distance passed through by one revolution of screw, which for distinctness is here shown to be greater than it would be for an ordinary screw). Draw a vertical line *f g*, equal to diameter of screw, opposite its side view C D, the centre

line *e h* being common to both. On *e* as a centre, with the radius *e f*, or *e g*, describe the semicircle *g i f*, which will represent the outer circumference of thread, and on *e* as a centre, and with radius *h o* or *h n* describe the semicircle *m*, which will represent the inner circumference of thread; bisect the pitch C A in *k*, which will be the distance of half a revolution of screw—one half being sufficient for the purpose—and the part really visible to the eye of the observer, the other half being represented by the dotted line P; divide the quadrants *g i* and *f i* into any number of equal parts represented by the radial lines 1, 2, 3, &c. Bisect *r s* in *l*, and divide *r l* and *l s* into equal divisions as at 1′, 2′, 3′, &c., corresponding to the number of the radial lines with similar figures in semicircle (and which semicircle corresponds to the half revolution *c k*). Draw vertical lines through these divisions, and from the point where the radial 1 intersects the larger semicircle draw a line parallel to *e h*, cutting the vertical line 1′ of its corresponding division; this will be one of the points for the curve.

From the points in the larger semicircle intersected by the radials 1, 2, 3, &c., draw lines parallel to *e h*, cutting their respective vertical lines 1′, 2′, 3′, &c., and a curve passing through these points will give one quarter of the curve. The points in the lower part, completing the half revolution, are found exactly in a similar way from the lower half *i g* of semicircle or quadrant. Having found one half thus, for practical purposes, when the remaining half is required to be drawn, it is easy to trace it, turn over the tracing, and prick it through, or rub the back of tracing, leaving the pencil mark, which will complete the curve for a whole revolution.

The curve of the inner part of the thread is constructed precisely in the same manner. From the points intersected by the radials 1, 2, 3, &c., in the inner semicircle *m*, lines drawn parallel to the others for the outer part of thread, and cutting the same verticals 1′, 2′, 3′, &c., as in the other,

will give the required curve, as shown in diagram. It may be mentioned that the same semicircle with its divisions is the same for any pitch, the diameter being the same. For triangular-threaded and internal screws, as in sections of nuts, the process is exactly similar.

In a series of threads, as in Fig. 205, for the outer part, the



Fig. 205.

outlines of each side of each thread are exactly alike, and the curves of the inner part *a b* on each side are also alike. In making a drawing of a screw such as that represented in accompanying diagram, the simplest way is, after having found (by the process described at Fig. 204) the part of the curve from *c* to *d*, to trace this half diameter and prick through the traced line to a piece of cardboard or thin wood, and having cut the curve out as a mould, by reversing it and turning it upside down, it will be suitable for drawing in both sides, and both edges of every thread, the centres of each thread and space being drawn in previously as represented by the vertical lines *e*, *f*, *g*, *h*. It will be found the easiest way to pursue the same method for the curves *a* and *b*. In drawings to a small scale, the front view of the threads is generally drawn straight and at an angle.

NOTE.—For drawing in the proper number of threads to the inch to a given diameter of screw the following table will be found useful for the two kinds of threads in common use :—

V-THREADS.				SQUARE THREADS.	
Diameter in Inches.	Threads per Inch.	Diameter in Inches.	Threads per Inch.	Diameter in Inches.	Threads per Inch.
$\frac{1}{4}$	20	$1\frac{7}{8}$	$4\frac{1}{2}$	$\frac{5}{16}$	9
$\frac{5}{16}$	18	2	$4\frac{1}{2}$	$\frac{3}{8}$	9
$\frac{3}{8}$	16	$2\frac{1}{4}$	4	$\frac{7}{16}$	8
$\frac{7}{16}$	14	$2\frac{1}{2}$	4	$\frac{1}{2}$	7
$\frac{1}{2}$	12	$2\frac{3}{4}$	$3\frac{1}{2}$	$\frac{9}{16}$	7
$\frac{9}{16}$	11	3	$3\frac{1}{2}$	$\frac{5}{8}$	7
$\frac{5}{8}$	11	$3\frac{1}{4}$	$3\frac{1}{4}$	$\frac{11}{16}$	7
$\frac{11}{16}$	10	$3\frac{1}{2}$	$3\frac{1}{4}$	$\frac{3}{4}$	6
$\frac{3}{4}$	10	$3\frac{3}{4}$	3	$\frac{13}{16}$	6
$\frac{13}{16}$	9	4	3	$\frac{7}{8}$	6
$\frac{7}{8}$	9	$4\frac{1}{4}$	$2\frac{7}{8}$	$\frac{15}{16}$	6
$\frac{15}{16}$	8	$4\frac{1}{2}$	$2\frac{7}{8}$	1	5
1	8	$4\frac{3}{4}$	$2\frac{3}{4}$	$1\frac{1}{4}$	4
$1\frac{1}{8}$	7	5	$2\frac{3}{4}$	$1\frac{1}{2}$	4
$1\frac{1}{4}$	7	$5\frac{1}{4}$	$2\frac{5}{8}$	$1\frac{3}{4}$	3
$1\frac{3}{8}$	6	$5\frac{1}{2}$	$2\frac{5}{8}$	$1\frac{1}{2}$	3
$1\frac{1}{2}$	6	$5\frac{3}{4}$	$2\frac{1}{2}$	$1\frac{5}{8}$	$2\frac{3}{4}$
$1\frac{5}{8}$	5	6	$2\frac{1}{2}$	$1\frac{3}{4}$	$2\frac{1}{2}$
$1\frac{3}{4}$	5				

The angle of the V-thread is generally 55°, and the depth of the nut equal to the diameter of the bolt.

In drawing the elevation of a circular staircase turning either to the right or left, of which Fig. 206 is a view of the latter, A being a half-plan, the same process is applied as in drawing the thread of a screw, Fig. 204, and will be understood by the dotted lines.



Fig. 206.

To draw a front view or plan of a worm, or screw wheel.

The first part of the process consists in simply drawing a portion of the thread of a screw, its full diameter being cut off at each side, at *a* and *b*, Fig. 207, by the breadth of wheel *c d*—*c d* being less than the diameter *e f* of screw.

Let *g c h d* be the profile of worm wheel, and I the end view of screw, or *worm*, draw a half-face view K of the wheel, having the same centre line common to both views; draw the centre line *l m* through the side view of wheel and screw, and when required to be very accurate for the process on a larger scale then *m c* and *m d* may be bisected, and lines drawn through the bisection parallel to *l m*, making semicircles in half-plan K to correspond; one line *l m* is

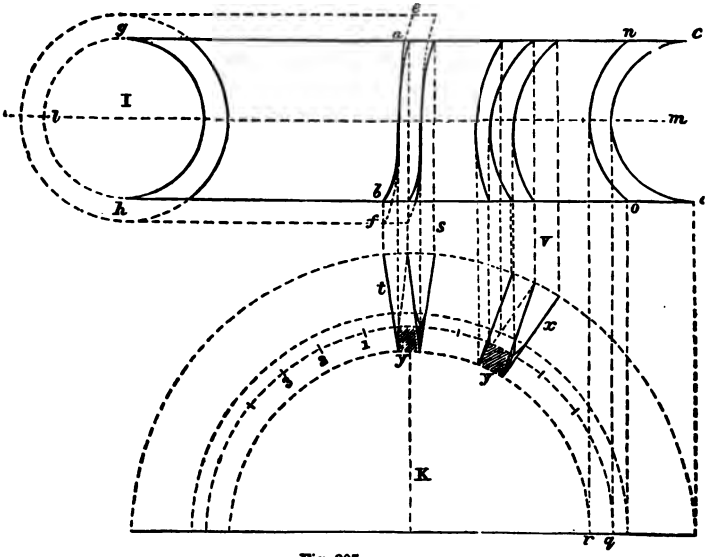

Fig. 207.

sufficient in the present instance to show the process. The line *n o* is the bottom line of tooth, the dotted semicircles *r q* representing the same in face K. Complete one tooth in centre of wheel as at *e f*, in the same manner as in drawing the threads of a screw from an end view I, and as described at Fig. 204; from the points where the curve cuts the centre line *l m* and side lines *g c* and *h d*, draw down vertical lines *s* to face view K. The position of middle part of tooth requires to be shown distinctly (for

the process only) as in sectional lines in K at *y*. This process will give all the points for the end view of the curved tooth as shown at *t*. Having previously divided or pitched off the centres of the teeth as shown at 1, 2, 3, &c., transfer the identical form of the tooth at *t*, to each division at 1, 2, 3, &c.; from the corresponding points in each tooth, as at *t*, draw vertical lines up to profile view, which will give points for the proper form of each tooth, as it recedes to the right or left of centre of wheel, and as shown by the dotted lines V, drawn from a tooth *x* placed in its position at one of the divisions. Of course, no two curves of the teeth on profile are alike. These varying forms are drawn in with the moulds referred to in Chapter IV., and when thus completed such representative lines as the dotted ones *n o*, being only pencil lines for finding diameters in the face K, are not retained. Fig. 208 is a finished view of a worm wheel made according to the process just described.

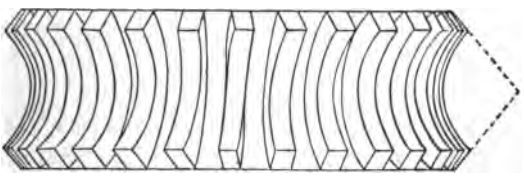

Fig. 208.

The delineation of screw threads, &c., just described naturally leads to the subject of screw-propellers, which is simply the common screw with a flat thread, the body or inner diameter of which is necessarily small in proportion to those in the examples already described.

If it is required to find the sections at two or three places in the length of arm or blade of a screw-propeller, and to show the same in plan, proceed as before by drawing a half end view, as at A E B, Fig. 209, and make C D half the length of pitch, having the same number of divisions, 1, 2, 3, &c.,

as in the semi-circumference A E B. From the points H and I draw the horizontal lines F H and G I, intersecting the semi-circle at F and G, which will be the end view breadth of blade of screw. Complete the sides of blade to inner diameter M and N, to which also the points K and L correspond. If the section is in the position O P or Q R produce the horizontal lines as shown from the points O Q and P R

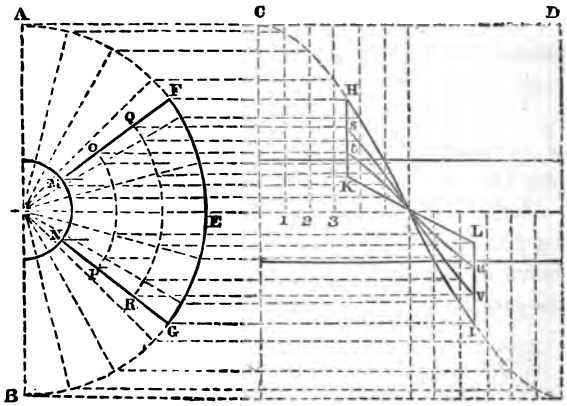

Fig. 209.

to *s t*, *u v*, in the sides of blade H K and L I in plan, and complete the curves between *s v* and *t u*, which will give the section at the parts required. These sections are found as before, from the points where the radial lines in end view cut the sectional arcs O P and Q R, by producing horizontal lines from such points, cutting the corresponding vertical lines 1, 2, 3, &c., in plan, which are common also to any diameter of thread less than A B, having the same pitch.

In the subjoined diagrams, Figs. 210, 211, 212, are represented front and side views of screw-propellers having two, three, and four blades respectively. The dotted lines from the front views showing the corresponding points in the side views of each.

In any long objects, such as shafting, when too long to

admit of full length to the scale on which the drawing is being made, the ordinary way is to show it as if broken



Fig. 210.



Fig. 211.



Fig. 212.



Fig. 213.

through. For iron work, it should never appear too ragged at the break. The break is made in the middle of the length shown, as at *a* in diagram, Fig. 213, or at any other convenient place, depending on its surroundings. If it is a round shaft, it is better to show the section as in adjoining diagram—of an elliptical form, and more especially so if the drawing is only to be an outline—the extreme ends being finished similar to the object represented. If it is a square shaft, or any other square object,—as at section represented at *b b*; if a hollow beam, or square pipe,—as at *c*; or a round pipe, or cylindrical object,—as at *d*; greater thickness of material should be shown at the top and bottom than at the sides, in the two latter instances, thus showing a little perspective. Breaks in wood, and graining to represent oak, as in subjoined diagram, Fig. 214, are

executed by the drawing pen; and in doing more than one plank, as shown in diagram, Fig. 215, at *a b c*, where they are



Fig. 214.



Fig. 215.

joined at the sides, the break at the ends should be such as to show each distinct from the one adjoining it; and in showing a portion of iron plates, where two or three are joined together, the distinction of each plate at the ends should be clear, as in diagrams A and B, Fig. 216.



Fig. 216.

In any object where the full length is not to be shown, it is better to represent it broken off than squared off, as the latter course would indicate the termination of its length.

CHAPTER XIV.

INKING-IN A DRAWING.

As a drawing is a series of boundary lines, the lines should be as fine as possible, especially for a drawing which is to undergo the process of shading. The ink should not be so black for the latter purpose as for a drawing that is to be only an outline, so that the light lines may blend into the colouring. Lines for such drawings should be as nearly as possible "length without breadth."* Summer is the best

* Lines should never be drawn of such a thickness all over as to suggest the question, Whether the right size is to be obtained from the outer or inner side of line?

for outlines; for the paper being more dry, a clearer line can be drawn. In winter the paper will get damp under the best circumstances. A clean sponge, a tumbler of clean water, and a sheet of clean white blotting-paper, should always be within reach, in case of any accident happening to the drawing.*

Before rubbing down the Indian ink, it is necessary to have the palette quite clean and free from dust.†

In not inking-in a drawing of an intricate kind until all pencilled in, the first pencil lines are apt to get obscure and cause confusion, to obviate which it is better to ink-in such a drawing as the pencilling proceeds, taking care always to put in the parts of the object supposed to be nearest you first. This method is especially advisable when the drawing has to be in hand for a lengthened period

The ink should be at least a quarter of an inch up the pen or compass ink-foot. If a little brush is used, with which to supply the pen, it is better to keep it exclusively for such purpose, as it will be almost useless for any other after. A little slip of paper may be used, but the common plan (*not the most cleanly*) is to moisten the ink-foot in the mouth, so that capillary attraction will cause the ink to ascend. The mouth should be well washed out with water after meals, as, if the pen is the least greasy, the ink will not flow freely. The superfluous ink should be wiped clean off from each side of the pen, or it will probably blot the drawing. It is

* Should a drawing get an ink blot, the blotting-paper should be applied first, and if clear of any lines on the drawing the place sponged immediately after, and if among lines, the part should be washed with a small hard brush instead of using the sponge, and the line renewed with very thin Indian ink, or with a hard fine-pointed pencil, or it will never be one with the other lines owing to the roughness of the part after the process named.

† A common card, bent up half an inch at one end, will be found useful upon which to place the Indian ink cake immediately after using, otherwise it is likely to soil everything with which it comes into contact.

NOTE.—A little ox-gall mixed up with the ink assists it to flow more freely from the pen. It is sold in little pots at 8*d.* each.

better always to try the pen or ink-bows on the margin of the paper, taking care not to come within the cutting-off line of paper referred to in Chapter XII., before drawing the required lines or circles, so as to regulate the pen to the proper fineness. All ink circles or curves should be put in before any lines,* and any parts of circles inconveniently small for ink-bows should be put in with a fine-pointed metallic *crow-quill.*

In using the ink compasses, the lower part of the legs should be as nearly vertical as possible. If it is attempted to draw too large a circle, the legs being at a great angle, a large hole will be made in the paper at the centre of the circle; in a proper drawing the compass centre marks should hardly be seen. The ink leg, especially for small circles, should be shorter than the other. In drawing a circle the compasses should be held by the top, by the right hand (without holding the centre leg during the process in its position by the left hand); and in inking, the ink leg should be made to bear as lightly on the paper as is necessary to produce the circle. It is always necessary to see that the radius of ink compasses fits the pencil circle all round before touching the paper with the ink point. The reason for drawing in the circles before the lines is, it is easier to join the lines to circles the least thing "*out*" than to join circles to lines a little out of the right place.

In drawing a series of concentric circles, when not of large diameters, it is better to make the smallest first; for if the compass leg enlarges the hole in the centre, which it is likely to do after describing many of them, it would be more difficult to draw in the lesser circles correctly.

* If a larger circle has to be made than the ordinary lengthening bar will admit of, and to save the expense of beam compasses already referred to in Chapter IV., a piece of flat wood tied securely to the compasses, and having the ordinary ink-foot tied at the other end at the proper distance for the required radius, will be found to answer the purpose.

The drawing-pen should be held as nearly vertical as possible; but to get the point close to the lower part of the edge of the square—the top of the pen should be held with the least inclination outwards. The pencil line should just be visible; the square should be held firm in position to the board by the left hand, as in pencilling; and in drawing the line, if the points of the drawing-pen are not held in the direction to be drawn, it will leave the edge of the square (supposing the forward edge of points are inclined *outwards*). As a safeguard against such mistakes, some pens have the holder made with a part of it square. The pen should not be pressed unduly on the paper, or it will make a rough line. The line should be drawn always from left to right, and never in the opposite direction. After having got in all the circles, it will be found convenient while the square is on the board in one direction to draw all the horizontal lines first, beginning at the top, until the lowest is reached; and then, with the T-square shifted to the bottom edge of the board, beginning at the extreme left, draw in all the vertical lines.

A wrong line should never be scraped out with a knife, neither should an ink eraser be applied, especially in a drawing to be coloured. It is best to wash out a wrong line with a small hard brush, and slightly sponge over the place, through a hole of the requisite size cut in a scrap of drawing-paper to save the other parts of the drawing. A needle point will take out a short line in a way which leaves little trace of the error. If a line has to be drawn after washing out, it should be with thin Indian ink, or a hard fine-pointed pencil, as before stated.

In sections of boilers, &c., where the thickness of iron plate is shown in section to any scale under three-eighths of an inch, it is better to make it a thick black line, a little thicker than any shade line, if any, in the drawing. Sections of the same material, when the scale is above three-eighths of an inch to a foot, should have a double line.

In office outline drawings for reference, it is frequently the custom to outline the cast iron in Indian ink, the malleable iron in blue, the brass in yellow, and the copper in red.

A drawing to be coloured should never have any dotted lines indicating parts of the machine not visible to the eye, as those parts are made visible by the lines. A highly-finished coloured drawing may not be a perspective view, but still it is intended to be a picture. Dotted lines, therefore, should only appear in common or working drawings intended for reference, where they are very useful.

Sections of end wood should be circular, especially if the drawing is only to be outline, to distinguish it from iron or other section, which should be straight and at the angle of 45°. The wood can be done with the ink compasses and Indian ink if for outline drawing only, and with wood colour if a coloured drawing. In drawings to about one inch to a foot, if the grain circles are to be equidistant, spring bows are the best for the purpose, as one whole turn of the nut will open the ink foot to the required distance after drawing each circle. If more than one beam end is shown, the centre of the grain circles should be in a different position in each section; and there is more need for this variety when the ends are joined close together, as at *a*, *b*, *c*, Fig. 217.



Fig. 217.

Sometimes wood sections are shown by alternate thick and thin straight diagonal lines, as at *d*, either in Indian ink or wood colour. These can be made with either parallel rulers, or with a little wooden angle of 45° moved along the edge of T-square, kept firm on the board by a weight on each end, and which is more to be depended on than the former, or with T-square set at the proper angle by shifting the stock, drawing all the lines fine in first process, and making each intermediate line thicker after. It frequently happens

that beginners cannot do these lines very equally apart, and when two lines are much wider than they should be they fall into the second error of bringing the next line closer than all the rest to make up for the wide space, instead of gradually coming to the proper width again. When two sections or more of end material come close together, it is better to reverse the angled lines of section, leaving a clear little space at top and left side (or side the light is supposed to come from), as shown at *a* and *b*, Fig. 218.



Fig. 218.

In every section of the same kind this should be observed. The light space should not be shown where they join when flush or straight across. This will be more particularly referred to in Chapter XVI., on shading and colouring. In engraved work of machinery, &c., where there are sections across material like that already referred to, it is a common thing to have the angled lines in the same direction throughout, as shown at Fig. 219; and it seems to look better thus in an engraving than in a drawing owing to greater regularity. This process is called hatching. It is almost needless to remark that no such sectional lines on transverse sections are ever pencilled in before inking in drawings under one inch to a foot, though large sections with the distance between each sectional line being $\frac{1}{8}$th or $\frac{1}{4}$th of an inch, would, to look symmetrical, be divided by the compasses.


Fig. 219.

A drawing gone over in the manner described, with fine ink lines, may be considered for some purposes a finished drawing, without shade lines, colouring,* or printing,† the superfluous pencil lines being rubbed out previously to cutting off the sheet.‡

* If the drawing is to be shaded, and should the lines not be so fine as they ought to be, a slight sponging over them will take off the superfluous ink, which would be apt to *run* in shading.

† For which see Chapter XVII.

‡ For cutting off see Chapter XXIII.

*Shade lines.**—Shade lines, especially in an outline drawing, are considered by competent judges of such matters to be an improvement. They seem to throw out the projecting objects, as well as give effect to a recess, the line thicker than others adjoining showing apparently the side of the object very much foreshortened ;† for which reason it is not correct to put a shade line on the side of anything cylindrical, though for uniformity's sake a line a little thicker than the fine lines of the drawing, but not so thick as on the objects with a square side, is necessary. If they are to be put on an outline drawing it is better to finish the drawing first by the ordinary fine lines than altering the pen for thick and thin lines every minute. Shade lines are frequently objected to in either outline-finished, or coloured drawings; they are a matter of taste. When coloured drawings are to have such dark lines they should never be put on till after colouring, otherwise the brush in coming over them would cause them to *run* and blot. The ink for such purposes should be as thick as it will flow from the pen. A single shade line put on the wrong side of any part of a drawing by mistake would destroy the effect of the whole, whether for an outline only or a coloured drawing.



Fig. 220.

In engineers' drawings the shade lines are generally put on the right and bottom sides of projections, as shown at *a* and *b*, Fig. 220 (the same as the shadows in their shaded drawings), the tops and left sides being opposite the light.

In drawing a shade line on a circular projection, as at *c*,

* If a drawing is to be varnished, the shade lines should not be put on until after the sizing; and in all shade-line work indigo should never be used instead of Indian ink.

† Shade lines are therefore not suitable for isometrical or perspective drawings, the sides, &c., of the objects in such drawings being fairly represented. Drawings for working to should never have them.

Fig. 221, or on a circular recess, as at *d*, the thick lines should gradually terminate at a line drawn through the centre of the





Fig. 221.

circle at the angle of 45° to a horizontal line *e f*. This will be better understood after a perusal of Chapter XV., on Projection of Shadows. Shade lines should never be put on any plan of a pyramid or conical projection, or recesses of similar form to those having the sides bevelled to the extent shown in diagram A, Fig. 222. A projection or a recess having as little bevel as at *c* might be improved by having slight shade lines. In drawing the shade line on a circle a fine line should be made first, the ink points should then be opened a little after each time, and coming two or three times over where the line is to be thickest. The thickness ought to lessen gradually to the points already described, and should never exceed the half circle.



Fig. 222.



Fig. 223.

In shade lining a cylindrical object, as A, Fig. 223 (of which B is an end view), if the plane *e* was in a line with the centre, as shown in view B, or above it, as at *f*, there should be no shade line from *g* to *h*, where the plane intersects; but if the plane was below the centre of cylindrical object the shade line should be continuous on it.

In a figure such as a hexagon or six-sided nut there would be three different thicknesses of shade lines, that at *a*, Fig. 224, furthest from the light, being the thickest; the line *b*,

approaching nearer to the light, being finer, *c* finer than *b*, and *e*, *e*, *e*, more or less nearly opposite the light than the others, being ordinary fine lines. Each individual straight shade line should be of uniform thickness. Every shade line



Fig. 224.

should be of a thickness regulated by its being more or less from the light side, as shown in the last and adjoining diagrams, Fig. 225.

In making a shade line on a short length of a segment of a circle, of large radius, a mould will be found more convenient than any compasses.



Fig. 225.

The shade lines on *breaks* of wood or iron should have as much care as the shade lines on any piece of machinery adjoining. It is by attention to the details of apparently little things as well as of the apparently greater, that makes an effective whole. There should never be a shade line as a base line for any elevation supposed to be standing on any thing.*

CHAPTER XV.

PROJECTION OF SHADOWS.

The rays of an artificial light placed near to any object at right angles to a plane and of itself parallel, project a radiated

* Before laying aside the pallette it should be washed clean, as old dried ink when moistened again is apt to *run* in the colouring, and for an outline only it will not flow from the pen so freely.

shadow, as shown in diagram, Fig. 226, *a* being the position of the light, *b* the object, and *c* the shadow of the object

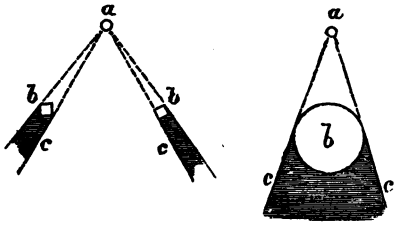

Fig. 226.

projected by the light, the sides of the shadow being in a direct line with the light.

In projecting shadows in mechanical drawings the light is supposed to be at such a distance as to come in apparently parallel rays; and assuming for our purpose that they are so, it is obvious that the projection of the shadow will be in parallels, as at *e f*, Fig. 227; or let *e*, Fig. 228, be a cylindrical object, and *a b* a plane placed at right angles to the rays of light *d h* or *c i*, the exact diameter of the object *e* will be projected on such plane at *l m*, and the sides of the shadow will be parallel to each other whether the plane is or is not parallel to the cylinder. If the plane be oblique to the rays of light as shown at *f g* the shadow is increased on the plane to the breadth *h i*, the shadow having its sides parallel whether the plane *f g* is or is not parallel to the cylinder.



Fig. 227.



Fig. 228.

In engineering drawings the shadows are generally understood to be projected at the angle of 45°, and inclined also at that angle from a projecting object towards the right hand.

The angle of inclination at 45° is projected with facility

by setting off equal distances on the base and vertical lines of any rectangular part in a drawing. The length of the shadow is measured from the object on the diagonal (or angle of inclination), and is equal to the projection of the object from the plane.*

It is impossible to project the shadows of any object correctly on any drawing of which there is only one view, and which is to be shaded, if the several projections on such view are not exactly known. In such instances the only alternative is to make undefined shadows as to their length or breadth at the ordinary angle from any of the parts obviously known to project, and to soften them off with the water brush. In intricate drawings of machinery, even where all the projections are known, if every shadow were projected and put in distinctly with a hard edge of the proper outline (as would be done in a plain drawing having few parts and details), it would have much the same effect, when shaded, as a well-used sheet of blotting-paper; in such cases it is better to soften off most of the shadows.

PROJECTION OF SHADOWS.—FIRST SERIES.—The plans and elevations being given, in all cases the plans are invariably understood to be directly opposite their elevations, and their side views opposite their front views. In projecting the following shadows the angle of 45° is that in which the parallel rays of light are supposed to come.

In the following examples the plane on which the shadow is projected may be considered either horizontal or vertical, the shadows (according to the ordinary system) being identical.† In drawing the angular lines the T-square and little wooden set square, having an angle of 45° bearing on it, as

* Frequently in architectural and other drawings the shadow, measured from the object on the angle of inclination, is of greater length than the projection of the object from the plane; neither is the angle of inclination in such drawings always 45°. See also note, Fig. 260.

† The process in the Second Series of the Projection of Shadows is also applicable to the examples given in this First Series; but the shadow being projected on a horizontal or vertical plane, renders such application less necessary.

indicated in position in the following diagram at *e*, Fig. 229, should be used throughout as being best calculated to facilitate the operation.

To project the shadow of a square column, having its opposite sides parallel, on a plane at right angles to it.

Let A, Fig. 229, be the plan, and B the elevation of column. From the points *h*, *m*, *k*, draw the lines *h i*, *m n*, and *k l* at the aforesaid angle; on the line *h i* from the point *h*, set off the height of column *c d* at *o*; repeat the same from *m* at the point *p*, and from *k* at the point *r*; join *o p* and *p r*; *h o p r k* will be the projection of shadow required. It will be obvious that the termination of the shadow is a fac-simile or counterpart of the plan of column. The process described is given as being more explanatory, but in the examples which follow it will be quite unnecessary to repeat it. In actual practice, having first found the length *h o*, equal to the length of column *d c*, the point *o* would be quite sufficient for finding the other points at *p* and *r*, for *o p* being parallel to the sides of column *m h*, the right-angle side of set square bearing on the T-square and placed at the point *o*, would, by drawing the line *o p*, find the point *p*, and since *p r* is also parallel to the side of column *m k*, the T-square placed at the point *p* already found would draw the horizontal line *p r*, thus completing the required shadow without setting off the lengths at *p* and *r*, as in the first process shown.



Fig. 229.



Fig. 230.

To project the shadow of a cylinder on a plane at right angles to its axis.

Let A, Fig. 230, be the plan, and B the elevation of cylin-

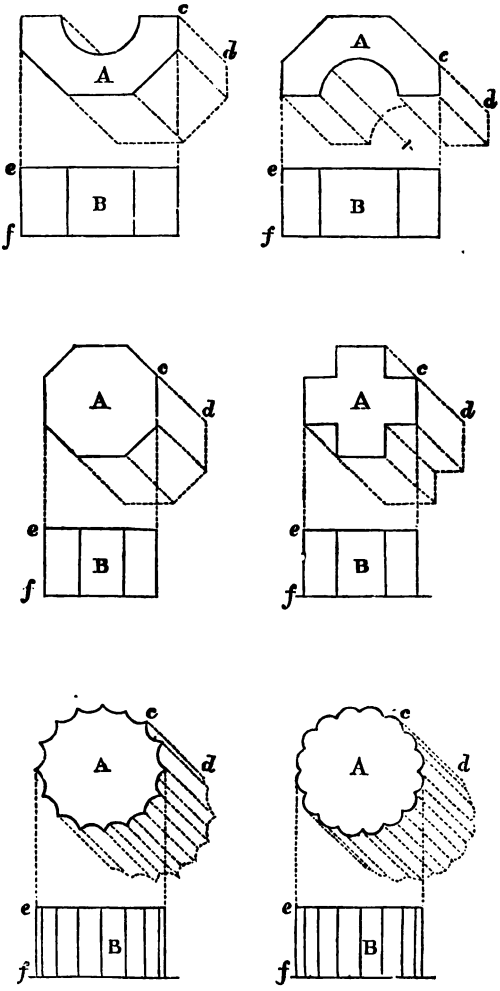

Fig. 231.

der. From the point *e*, the centre of cylinder A, draw the

diagonal *e g*; from the point *e* set off the distance *e f* equal to the height *e d* of elevation B; from the point *f*, with a radius equal to half the diameter of cylinder, describe the semicircle *k l m*; from the points *k* and *l* draw the lines *i* and *h* parallel to *e g*, which will be the projection of shadow required.

In the preceding examples, Fig. 231, the projections of their shadows are found in a manner similar to those already described, and will be understood by the dotted lines. A are the plans, and B are the elevations of the several objects, which are at right angles to the plane on which their shadows are projected; and in each case the length *c d* in plans A is equal to the height *f e* of elevations B.

To project the shadow of a square tapered column on a plane at right angles to it.

Let A, Fig. 232, be the plan, and B the elevation of column. From the three points *l*, *m*, *n*, in top of column C, draw the diagonal lines—as if the column were parallel; on these lines, from the points *l*, *m*, *n*, set off the distances *l i*, *m d*, and *n k*, each equal to the vertical height *e f* in elevation B. Join *g i*, *i d*, *d k*, and *k h*, which will be the projection of shadow required.



g. 232.

To project the shadow of an obelisk on a plane at right angles to it.

Let A, Fig. 233, be the plan, and B the elevation of object. As in last example, Fig. 232, set off the length of the sides at *h* and *i*, equal to the vertical height *l k* in elevation B, and from the centre *o* of plan A set off the distance *o g* on central diagonal line equal to entire height *f e* of elevation B from

base line. Join *d h*, *h g*, *g i*, and *i n*, which will be the projection of shadow required. The projection of the shadow at the side of the pedestal in plan A is equal to the heights *a* &c., in elevation B set off on the diagonals *r s t* and *u v y*.

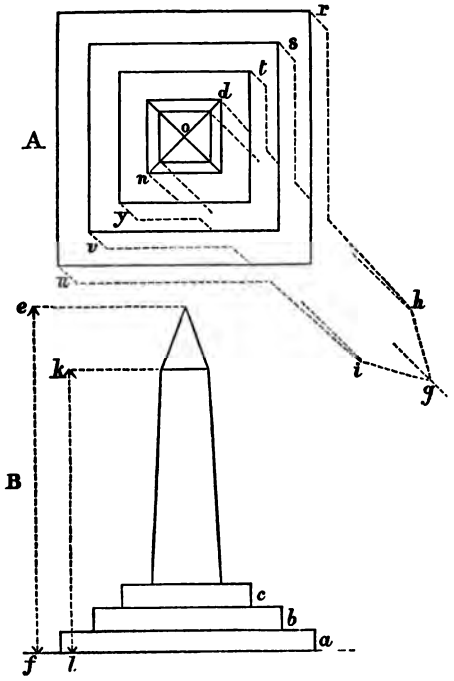

Fig. 233.

To project the shadow of the side of a cylindrical recess between two planes at right angles to it.

Let A, Fig. 234, be the plan, and B a section showing the depth of the recess. It is required to project the shadow of the upper part *f g k* on the inner plane C.

Through the centre *h* of circle, or recess, draw the diagonal; from the centre *h* set off the distance *h i* on the diagonal

equal to the depth *d e* of recess in section B; from *i* as centre, and with a radius equal to half the diameter of recess, describe the circle *l m n*, which will be the projection of shadow required.

To project the shadows in a series of square recesses, the planes of each being parallel.

Let A, Fig. 235, be the plan of the object, and B a section



Fig. 234.



Fig. 235.

showing the several depths. Draw the diagonal *c d*; set off the distance *c n* equal to the depth *g h*, in section B, *e o* equal to the depth *h i*, and *f p* equal to the depth *i k*; from the points *n*, *o*, and *p* in plan A draw lines parallel to *c m*, and also from the same points lines paralled to *c l*, which will be the projection of shadows required.

To project the shadow of a vertical square parallel column into a parallel plane recess, and upon the plane adjacent.

Let A, Fig. 236, be the plan, and B an elevation of the object. Proceed as in Fig. 229, making the distance *c d* in plan A equal to height *e f* in elevation B; *c d g h i* will be the projection of shadow required.

To project the shadow of a vertical square parallel column into an adjacent parallel plane recess.



Fig. 236.

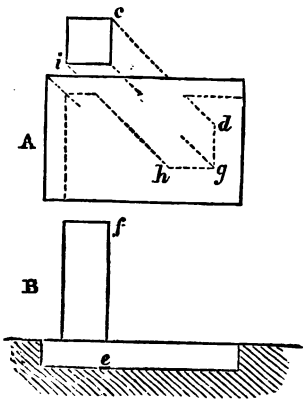

Fig. 237.

Let A, Fig. 237, be a plan, and B an elevation of the object. Proceed as in Fig. 229, making the distance *c d* in plan A equal to the height *e f* in elevation B; *c d g h i* will be the projection of shadow required.

To project the shadows of square parallel columns lying obliquely to a plane.

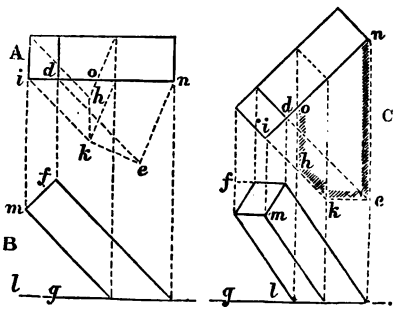

Fig. 238

Let A, Fig. 238, be the plans, and B the elevations of the

objects. From the points *d* and *i* in plans A draw the diagonals, set off the distance *d e* equal to the height *g f* in elevations B, and *i k* equal to the height *l m*, and join *k e*, *k h*, also the sides *n e* and *h o*; *n e k h o* will be the projection of shadow required.

NOTE.—When the object is at the angle of 45° with the plane, and also inclined in the plan at that angle, as in the diagram at C, the sides of the shadow will be vertical as shown.

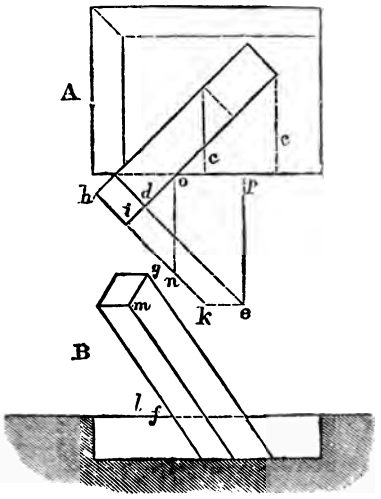

Fig. 239.

To project the shadow of a square parallel column on two parallel planes recessed, the column being oblique to the planes at an angle of 45°, *and also inclined at* 45° *in its plan.*

Let A, Fig. 239, be the plan, and B the elevation of the objects. In plan A the dotted lines *c c* will represent the shadow as projected on the inner plane (as in last example, Fig. 238). For the projection of the shadow on the upper or outer plane, set off the distance *d e* on the diagonal equal to the vertical height *f g* in elevation B, and the distance *i k*

equal to the vertical height $l\ m$; also set off the same distance $h\ n$ from the point h; from the points e and n draw the vertical lines $n\ o$ and $e\ p$, which, with those at $e\ k\ n$ and $c\ c$, will be the projection of shadow required.

To project the shadow of a square parallel column on two parallel planes recessed; horizontal in plan, and inclined between 90° and 45° in its elevation.

Let A, Fig. 240, be the plan, and B the side elevation of the objects. Set off the length $c\ d$ on plan A equal to the vertical height $e\ f$ on elevation B; draw $g\ h$ in the direction $g\ d$, and

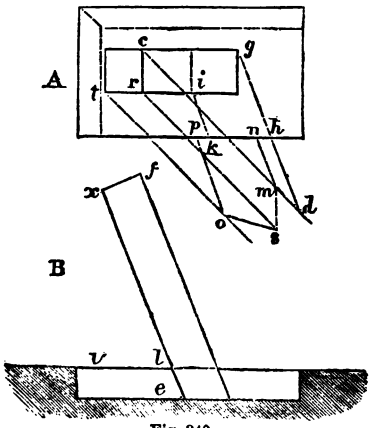

Fig. 240.

draw $i\ k$ parallel to $g\ h$; $g\ h$ and $i\ k$ will be the projection of the shadow on inner plane. On first diagonal line $c\ d$ set off the distance $c\ m$ equal to the vertical height $l\ f$ in elevation B, draw $m\ n$ parallel to $g\ d$, also set off the same distance $l\ f$ from r at s, and the distance $t\ o$ equal to the vertical height $v\ x$; draw $o\ p$ parallel to $m\ n$, and join $m\ s$ and $s\ o$; $n\ m\ s\ o\ p$ will be the projection of the shadow on the outer plane, which with that on the inner plane will be the shadow on both as required.

To project the shadow of a square parallel column on a pedestal, being a plane, also on a plane adjacent and parallel to it; the objects being horizontal in plan, and the column inclined between 90° *and* 45° *in its elevation.*

Let A, Fig. 241, be a plan, and B the elevation of the objects. Draw the diagonals from *c*, &c., on which set off the distances *c d* and *c′ w*, each equal to the vertical height *e f* in elevation B, and the distance *v x* equal to the vertical height *b z*, and join *d w* and *w x*. In plan A produce the line *c l* to *k*; *k* being the point on base of column if produced to lower plane (corresponding to the point *i* in side-view B). From the point *d* in plan A draw *d n* in the direction *d k*, and from the point *x* draw *x o* parallel to *d n*; this will complete the projection of shadow on lower plane, which will terminate at *n o*, being its intersection with the line of shadow of pedestal *t u*. From the point of intersection of column with upper plane at *l* (corresponding to *m* in elevation B) draw *l h* parallel to *k d*, and from the point of intersection of column with upper plane at *a* (corresponding to the point *a′* in elevation B) draw *a g* parallel to *l h*. *l h* and *a g*, on upper plane, and *n d w x o*, on lower plane, will be the projection of shadow required.

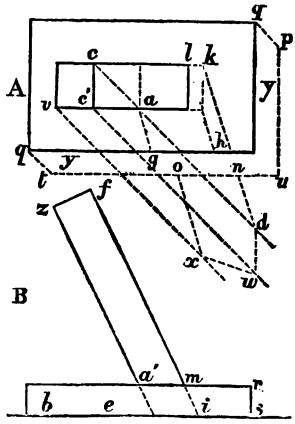

Fig. 241.

The projection of the parallel shadow of pedestal at *y y* is found by setting off the height of pedestal *s r* in elevation B, on the diagonals *q p* and *q t* in plan A.

NOTE.—The projections of the shadows of inclined objects of various cross sections are found in a similar manner to the preceding; that of an inclined cylinder is found by completing the ellipse (see Chapter XI. Fig. 180) at its intersection with

the plane, and drawing lines tangentially (as at Fig. 230) for the two sides of the shadow to the projection of its upper end, which will be at 45° from the top of the object; the shadow will be broader than the diameter of the cylinder if inclined otherwise than directly from, and towards the light.

To project the shadow of a square knee—in its section square, on a plane at right angles to it.

Let A, Fig. 242, be the front and B the side view of the



Fig. 242

object. On the diagonal from *d* set off the distance *d e* equal to length *f g* from the plane in side view B, set off the same distance from *n* at *m* and from *k* at *l*, join *e m* and *m l*. Also with the length *a c* in side view B set off the distance *d r* and *x o* in front view A, and join *o r*; from the point *o* draw a vertical line, and from the point *t* (corresponding to the upper edge *a c* in side view) draw a diagonal parallel to *d e*, intersecting the vertical line drawn from *o* at *s*, completing the projection of shadow required.

To project the shadow of a square parallel object, inclined, and projecting from the side of a plane at right angles to it.

Let A, Fig. 243, be the side view, B the front view of the object, and F the plane upon which the required shadow of the object is to be projected. From the points *d* and *h*, where the vertical line (or side of plane) *c e* intersects the side view of object A, draw the horizontal lines *d g* and *h i*; and from the points *k*, *l*, *m*, in the end of front view B draw the

diagonals; with the horizontal distance *r s*, in side view A, from the point *k* in front view B, set off the length *k n*; and with the horizontal distance *t u* from the points *l* and *m* set

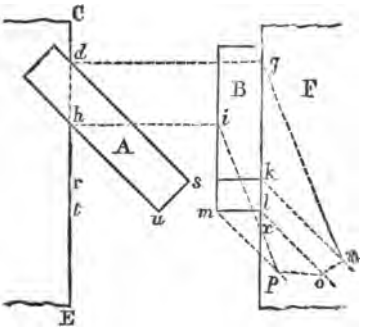

Fig. 243.

off the length *l o* and *m p*; join *g n*, *n o*, *o p*, and *p i*, the latter intersecting the side of plane at *x*. *g n o p x* will be the projection of shadow required.

To project the shadows of parallel objects radiated from a common centre, whose lengths are equal from the centre, and projecting from the side of a plane at right angles to them.

Let A, Fig. 244, be the side, B the front views of the objects, and F the plane upon which the shadows are to be projected. From the point *k*, corresponding to the point *s* in side view of object A, draw the diagonal; from the point *h*, where the side of the plane *c e* intersects the radial line *w s*, draw a horizontal line *h g*, intersecting the line of plane *i x* at *g*; from the point *k* set off on the diagonal the length *k l*



Fig. 244.

equal to the horizontal distance *r s* in side view A, and join

g l. *g l* will be the projection of the shadow on the plane F of the radial *h s* in side view A. Proceed in the same way with the other radials; *m n o p q* will be the projections of the shadows required.

NOTE.—When these radial lines or arms have a periphery, as shown in Fig. 245, of which A represents the side and B the front views; if lines, as at *d f*, at any distance apart be drawn at right angles to C E (instead of being radiated as in the other), and produced horizontally to *i x*, and diagonal lines, as *g h*, &c., be drawn from the several points of intersection, and the horizontal lengths *d f*, &c., be set off upon the respective diagonals, it is obvious that they would give points for a curve coincident with a curve projected from a periphery, on the extremities of the radiated lines as in Fig. 244, the position of plane, centre of circle, and radius being the same in either diagram.



Fig. 245.

To project the shadows of semicircular objects on the three sides of an octagon at right angles to the plane bounded by the three sides.

Let A, Fig. 246, be the plane upon which the shadows are to be projected, *f* the plans of the objects (supposed to be of imperceptible thickness). On each plan of object *f* draw their elevations B, C, D: divide them by any number of equally distant lines *f e*, and at right angles to the sides of the octagon. (Equally distant lines, though not quite essential, are convenient, for when each of the objects is similarly divided from its centre, one measurement on one divisional line on either side of its centre line will set off six of the

equal lengths required on the diagonal). From each of the intersectional points on the lines *f* draw the diagonals; set off the lengths *f g*, &c., equal to the corresponding heights *f e*, &c., a curve line passing through the points will be the projection of shadow required.

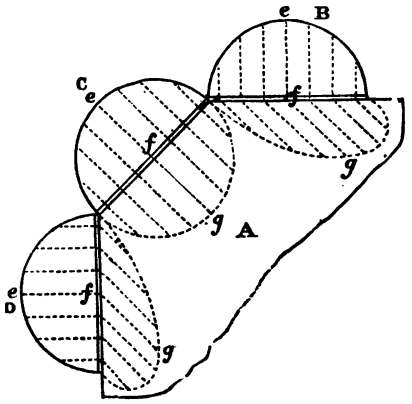

Fig. 246.

NOTE.—It will be obvious that the shadow projected from the semicircular object C will also be a semicircle, and the curve projected from B and D also similar to each other but in different directions. For any figures of irregular form the process would be the same.

To project the shadow of a half cylinder on a plane at right angles to its ends.

Let A, Fig. 247, be the plan of the object, and D the plane upon which the shadow is to be projected: draw a semicircular elevation B and C on each end of object, and proceed exactly as in Fig. 246, with the divisional lines on the elevations, drawing diagonals from their intersectional points,



Fig. 247.

and setting off the heights on the respective diagonals. It will be observed that the inner circle B is chiefly that which is required, only a part of the upper semicircle C being requisite for projecting the part of its shadow towards the right hand; curved lines passing through the points, joined at their extremes by the vertical line *e f*, will be the projection of shadow required.

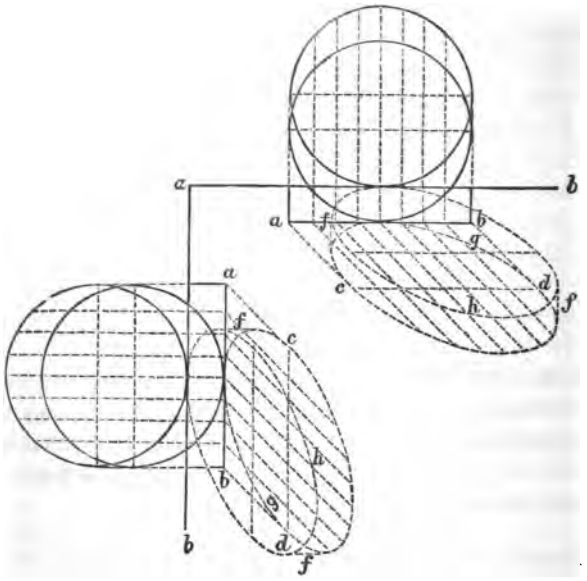

Fig. 248.

*To project the shadow of a cylinder on a plane parallel to its axis.**

From the preceding examples, the shadows projected by entire discs or cylinders, as in the accompanying example, Fig. 248, will be easily understood by the dotted lines, much further explanation being unnecessary: the lengths in the elevations of the objects being set off on their respective diagonals as

* Another method of projecting a similar shadow will be found in second series of shadows, Fig. 276.

heretofore, either from a base line *a b*, or the half breadths of the circles at their divisional lines, may be set off on a projected centre line *c d* on the corresponding diagonals. Having thus found the several points and drawn in the curves, the extremes of each pair are joined by the straight lines *f*, vertical and horizontal in the two diagrams respectively. As in a previous example (Fig. 247), it is only a part of each circle that is required for projecting the entire shadow, that, as projected at *g h*, drawn simply to show the process, being discarded. To prevent confusion the diagonals are omitted from the outer circles, the process being the same as for the

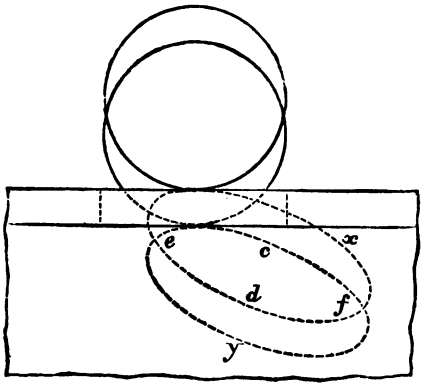

Fig. 249.

inner circles. Having found the several points as indicated, the outer curves passing through them will be the projection of shadow required.*

NOTE.—In drawing the curves projected by the rays of light through a circular aperture having its sides parallel, in any material object of parallel thickness at right angles to a plane, as shown in the diagram, Fig. 249, the process for

* In projecting such shadows in a drawing where there are a number of curves similar to each other, having projected one correctly, the simplest way is to trace it and transfer it to any other positions where requisite. Such process is referred to in Chapter XII.

finding the points of projection would be similar to that just described at Fig. 248; the difference being in the retention of the part of the ellipses *c d* in the present instance, discarded in the last example, and also the discarding of the parts *x* and *y*; neither would there be straight lines at the extremes of the curves. *c d e f* would be the projection required.

To project the shadow of a bracket on a plane at right angles to it.

Let A, Fig. 250, be the front view of the object from which the projection of shadow is required. Draw a side view B of

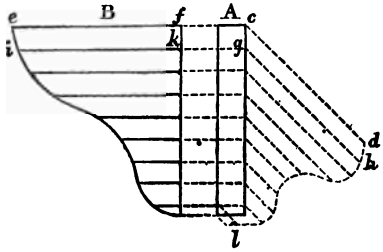

Fig. 250.

the object; divide it by any number of horizontal lines as shown; produce them to the right-hand side of front view A; from the points of intersection draw the diagonals; set off the length *c d* equal to the distance *e f*, *g h* equal to *i k*, and so on. A curve line passing through the points *d h*, &c., will be the required curve for the right-hand side of the object. As the projection of a part of the lower left-hand side of bracket is required, repeat the process, using the intersections of the horizontal lines on left-hand side of bracket, join the lower extremes of the curves by a horizontal line *l*, which will complete the projection of shadow required.*

In *ogee* mouldings the projections of their shadows are

* In actual practice, having found the shadow of lower part of bracket for right hand side, transfer by tracing for the left hand side, and join them by the horizontal line *l*. Process explained in Chapter XII.

similarly performed, as shown in subjoined diagram, Fig. 251, A being end views, and B plans of the objects referred to. Transfer the end views A to the plans B, as shown by the dotted curve lines *e*; divide *e* by vertical lines as shown, draw the diagonals from the intersectional points in the lower lines *c c*, set off the several heights on their respective diagonals (if each of the dotted end views at *e e* are equally divided, the same lengths on the corresponding diagonals are applicable in each); curved lines passing through the points will be the projection of the shadows required.



Fig. 251.

To project the shadow of a straight flange on a plane, being parallel and at right angles to it.

(NOTE.—The flange may be either horizontal or vertical, as in subjoined diagrams.) Let A, Fig. 252, be the front view of

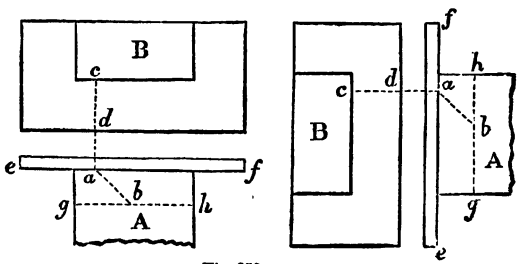

Fig. 252.

the plane on which the shadow of the flange *e f* is to be projected, and B a plan of the objects; draw the diagonal on front view A, on which set off the length *a b* equal to the distance *c d* in plan B, and through the point *b* draw the straight line *g h* parallel to the line of flange *e f*; *g h* will be the projection of shadow required.

NOTE.—A plan is not required as far as regards the projection of the shadow on a front view, when the projecting part of the object is straight and parallel to the plane on which the shadow of the vertical or horizontal object is to be projected, if the projection is known. For instance, if the distance of the projecting part *g h*, Fig. 253, is known to be 6 inches, then 6 inches taken from the scale to which the drawing is made and set off on the diagonal at *c d* would give the point through which to draw a line *e f* parallel to the projecting part *g h*, as explained at Fig. 252, the projection of shadow required on the plane A.



Fig. 253.



Fig. 254.

To project the shadow of a bevelled flange on a plane at right angles to it.

Let A, Fig. 254, be the front view, and B a plan of the object. From the points *a* and *c* on the lower line of flange *e f* in front view A draw the diagonals, from the same points *a* and *c* draw the vertical lines *a i* and *c k*; with the distance *l i* in plan B set off the length *a b* on the diagonal, also the distance *m k* on the diagonal *c d*. Through the points *b* and *d* draw the line *g d*, intersecting the side of plane at *h*; *g h* will be the projection of shadow required.

To project the shadow of a circular flange on a plane at right angles to it.

Let A, Fig. 255, be the front view, and B a plan of the object. Produce the line *c d* in plan B to *i*, divide the line *i d* into any number of parts by vertical lines, as shown at

h n, &c.; produce them to the lower line of flange *e f* in front view A; from the points of intersection draw the diagonals; with the distance *h g* in plan B set off the length *l m*, also with the distance *n c* set off the length *o p*, each on their respective diagonals, and so on with the other distances in plan B on the diagonals in front view A. A curve line *m k* passing through the points will be the projection of shadow required.



Fig. 255.

To project the shadow of a ring on a plane at a given distance from and parallel to it.

FIRSTLY, having its section rectangular (upper diagram.)

Let A, Fig. 256, be a plan, B a side view of the object, *c d* the line of plane, and *f e* the distance of the object from the plane. Through the centre of ring *i*, in plan A, draw the diagonal; from the centre *i* set off the length *i k* on the diagonal equal to the distance of ring *e f* from the plane *c d*; also from the point *i* set off the length *i l* on the diagonal equal to the distance *h g* (the distance from the plane *c d* to the top of the ring B); from the point *k* in plan A, with a radius equal to the radius of outer part of ring, describe the semicircle *m n o*, and from the point *l*, with the same radius, describe the semicircle *p q r*; join with straight lines *o r* and *m p*, the two semicircles described. From the point *l* on the diagonal in plan A with a radius equal to the radius of inner part of ring describe the part circle *s t u*, and from the point *k* with the same radius describe the part circle *s v u*, which, with the outer part already described, will be the projection of shadow required.

SECONDLY, having its section circular.

Let A (lower diagram) be a plan of the ring. Through the centre *w* of the ring draw the line *x y* in the direction of the light, also through the centre *w* draw a line *z a* at right

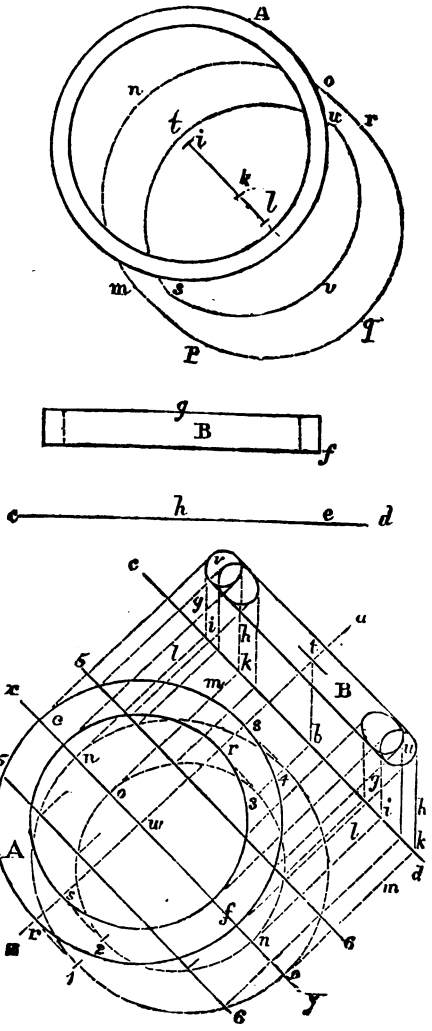
A
n
o
w
r
t
i
k
l
m
s
v
P
Y
g
B
f
c
h
e
d
c
v
g
i
h
k
l
m
u
t
B
b
x
e
s
r
n
o
w
s
A
f
r
2
1
n
6
o
Y
6
y
i
h
k
l
d
m

Fig. 256.

angles to $x\,y$. At any convenient distance draw a line of plane $c\,d$ parallel to $x\,y$. On $z\,a$, as a centre line, draw a side view, B, of the ring at its distance from the plane $c\,d$. At each end of the side view B draw sections v and u of the ring corresponding to the sections e and f in the line $x\,y$. To these draw tangentially, at the angle of 45° to the plane $c\,d$, the lines g and h, intersecting the line of plane $c\,d$ at i and k. From the points i and k draw lines l, m, each parallel to the line $z\,a$, intersecting the line $x\,y$ at n, o, which will be points for the shadow. From each side of the thickness of ring r and s, on either side of the diameter of ring in plan A, draw lines parallel to $x\,y$, and from the corresponding point t in the centre of the thickness of the ring in side view B, draw the diagonal $t\,b$ intersecting the line of plane $c\,d$ in b, from which point draw a line parallel to $z\,a$ intersecting the lines drawn from r and s at 1, 2, 3, 4, which will also be points for the shadow. Take any other sections in the plan of ring A, as at 5-6, and draw corresponding sections (see subjoined note) in side view B as shown, and proceeding as before for additional points, curve lines passing through which will be the projection of shadow required.

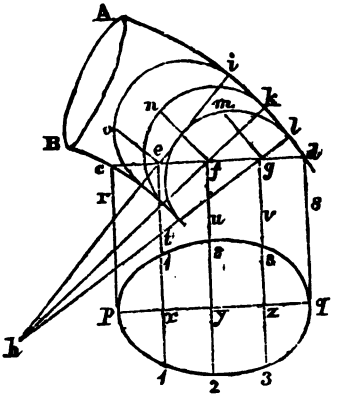

Fig. 257.

NOTE.—To find the points for describing sections such as that referred to, let A B, Fig. 257, be the outer and inner circumferences of a ring, circular in section, and $c\,d$ the line of section in plan of ring. Through any points e, f, g, in $c\,d$, draw the radial lines $h\,i$, $h\,k$, and $h\,l$ from h, the centre of the ring. On each of the radial diameters draw semicircles as shown, and from the intersectional points e, f, g, draw the

lines *e o*, *f n*, and *g m*, at right angles to the respective radial diameters. Let *p q* be the centre line of the figure to be described. From *c* and *d* draw the lines *r* and *s* at right angles to the line *p q* (Fig. 103, Chapter XI.), giving intersectional points for the length of the figure. From the points *e*, *f*, *g*, draw lines *t*, *u*, *v*, each parallel to *r* or *s*, intersecting the line *p q* at *x*, *y*, *z*. From the point *x* with the distance *e o* set off *x* 1 equally on each side of the line *p q*. From the point *y* with the distance *f n* set off *y* 2, and from the point *z* with the distance *g m* set off *z* 3. A curve line drawn through 1, 2, 3, and the points of extreme length already found, will be the figure required.

To project the shadow of a sphere on a plane.

Let A, Fig. 258, be a plan of the sphere from which the shadow is to be projected. From the centre of sphere *b* draw the diagonal *c d*, and through the same centre *b* draw a line *e f*, at right angles to *c d*. At any convenient distance draw a line *g h*, parallel to *c d*, which will represent the side view of the plane upon which the shadow is to be projected. From the point *i*, as a centre, draw the side view B of sphere tangentially to the line *g h*; divide the diameter of sphere A equally on each side of centre line *c d*, and draw the lines *l m*, &c., through the divisional points, and parallel to *c d*. From the centre *i*, in side view B, with half the diameters of *n o*, *p q*, &c., in plan A, as radii, draw the circles *r*, *s*, &c. At the angle of 45° to the line *e f*, and tangentially to the circles or diameters *r*, *s*, &c., draw the lines *u*, *v*, &c., to the line of plane *g h*, and from the points of intersection 1, 2, 3, &c., draw the lines 1-4, 2-5, &c., parallel to *e f*. Through the points where these lines intersect their corresponding diagonals, *c d*, *l m*, &c., a curve line *z* (ellipse) passing, will be the projection of shadow required.*

* The shadow may also be projected by the process described at Fig. 294.

NOTE.—The shadow of a sphere projected at the same angle as at Fig. 258, just described, is identical with the ellipse produced in a cylinder cut through at an angle of 45°. If the sphere were placed in a tube of the same diameter, and at the angle named (or in a direct line with the light), the tangential line of the sphere with the tube would be as indicated by the dotted line 6-7 in plan and side

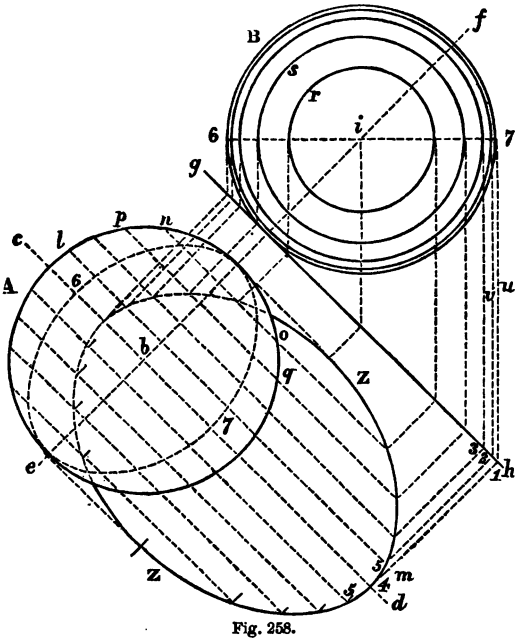

Fig. 258.

views A and B, Fig. 258, dividing the light from the dark side of object; and which tube, if produced and intersected by the plane, would be coincident internally in every point with the projection of the shadow of the sphere.

Objects such as that described will only project a shadow identical with their outline when the plane is at right angles to all the rays of light from the several points of the object.

To project the shadow in a hollow half sphere (or semicircular cup) of its side.

Let A, Fig. 259, be the plan of the object in which the shadow is to be projected. Through the centre *k* of the object draw the diagonal *b c*; divide the object equally on each side of centre line *b c* by any number of lines as at *l v*, &c. Through the centre *k* draw a line *f r*, at right angles to *b c*. At any convenient distance from plan A draw a line *d e*, parallel to *b c*. On the line *d e*, and from the intersectional point *y*, with radius equal to radius of plan A,

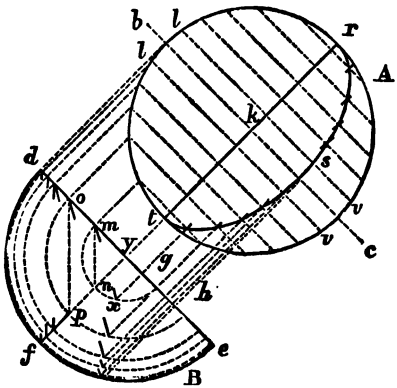

Fig. 259.

draw the semicircle *d f e*, which will represent a side view B, of the object. From *y*, as a centre, and with radii equal to the half diameters of the lines *l v*, &c., describe the semicircles in side view B, and from each of the points of intersection, *o*, *m*, &c., on the line *d e*, draw the diagonals *m n*, *o p*, &c., each at an angle of 45° to the line *d e*. It will be seen that the points *n*, *p*, &c., where the respective diagonals intersect their respective semicircles, are also the intersectional points of the centre line *f r*; the projection of the shadow required will therefore be the straight line *t r*.

NOTE.—If the angle of the light were greater or less than

45°, as shown at *m x* in side view B, the shadow would be a curved line in each instance, the greater angle projecting a concave and the lesser a convex shadow, as represented by the line *s* in diagram, the process being the same for finding the points in the curve as in that already described, and as indicated by the dotted lines *g h*, &c.

PROJECTION OF SHADOWS.—SECOND SERIES.—In the examples of the projection of shadows in the first series, the angle of 45° only has been employed, as from the nature of the projections it alone was requisite; but in the projection of shadows of a more intricate sort, as of those which follow, there are required in addition a plan and side views of the angle in its inclination, the relative angle of light in such views being similar. Suppose the object A, in diagram, Fig. 260, to be the front view of a little set square at the ordinary inclination of 45°, and also having the requisite angle of 45°, the side of which would be as represented by the dotted lines *f c g*. In looking from a position *e*, above it (supposing it possible to look in parallel lines at every point, as is supposed in mechanical drawings), it would present the angles as in plan B. It would also present similar angles viewed from the positions *l* or *p*. To project the angle—from a point *f* draw the diagonal, on which set off any length, *f g*; at any convenient distance draw a horizontal line or plane *h i*; from the point *f* draw a vertical line *f n*, intersecting the line *h i* at *n*; on the line *f n* from the point *n* set off the length *n m* equal to the length *f g*; and from the point *g* draw a vertical line *g d* intersecting the line *h i* at *d*, and join *m d*, which will be the plan of the angle of 45° as required.*



Fig. 260.

* In projecting shadows at any other angle or other inclination in a front view, it is obvious that the relative angle in the plan or side

As an application of what has just been explained to a mechanical object, and an illustration of the necessity of the projection of the plan or side view of the angle already referred to, let A, Fig. 261, be a cylindrical object or shaft (horizontal or vertical), and B a plane parallel to axis of shaft. The projection of the shadow of shaft is required on the plane B. Draw an end view C of the shaft,* and also

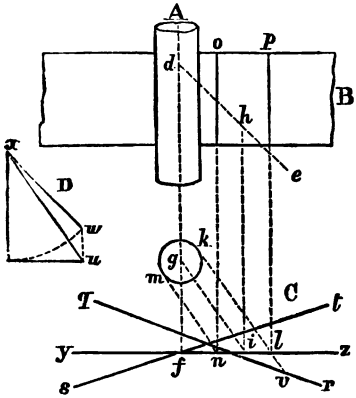

Fig. 261.

the horizontal line of plane $y\,z$ at its distance $f\,g$ from centre of shaft. In plan A from any point d (shown in this instance on centre line of shaft) draw the diagonal of 45°, which is the direction of the light; from the point d, with the distance $f\,g$ in end view C set off the length $d\,h$; from the point h draw the vertical line $h\,i$ intersecting the plane $y\,z$ at i, and join $g\,i$, which will then represent a side view of the angle of

view of the object must correspond to it, and is found in a similar manner. In some drawings the relative angle of light in plan or side view is as great as 45°, and the angle of inclination of shadow in front elevation also 45°, resulting in the projection of a longer or broader shadow than that described (Fig. 260). The latter is generally considered preferable, is more easily understood, and has therefore been adopted throughout this chapter.

* If A were a vertical view, C would be a *plan* as well as an end view. If A were a plan or horizontal view, then C would be an *end* view only.

45°, whose length of base is *d h* in plan A. Set the parallel rulers to the line *g i*, and from the diameter *m k* of the shaft, draw the lines *k l* and *m n* parallel to *g i*; and from the intersectional points *n* and *l* in plane *y z*, draw the vertical lines *n o* and *l p*. The vertical lines *o* and *p* will be the projection of shadow required on the plane B. If the plane were placed obliquely, as at *q r*, the breadth of shadow would be increased on it, as shown by the line *k l* produced to *v*; or if placed as at *s t*, it would have less breadth than in position *y z* in the first instance. At whatever angle the plane is placed the same process would be applicable, a horizontal and vertical line being always necessary* on which to erect the side view of the angle from its plan as at *d h*, and as explained at Fig. 260. The line of plane in example *y z*, as also the centre line of shaft, is taken advantage of in such instances, being ready drawn to hand, and being convenient lines; though in this and in many of the examples which follow, the angle may be projected anywhere in close proximity to the place where it is required, so that the requisite lines from the points of the object can be drawn with facility parallel to the plan, end, or side view of the angle of 45° referred to. In the example given, Fig. 261, the height *g f* is taken in the end view C from the plane *y z* to the centre of the shaft *g*. There is no other reason than that given why this height should be taken; any height would do equally well, so that the same distance is set off on its corresponding view of it as at *d h*. It may be projected in the position shown at D, Fig. 261, and by drawing *k l* and *m n* in end view C, parallel to *x u*, it will render the diagonal *d e* in plan A unnecessary, being drawn at *x w* for projecting the line *x u*.

To facilitate such process in the projections of shadows, where there are many lines to be drawn parallel to each other at the given angle on the plans and side views of the

* In the absence of a little set square having the proper angle, to bear on the edge of T-square.

several objects, it will be found convenient to use a little set square of the proper angle (and which would be as represented in Fig. 260 at *d m k*) to bear on the edge of the T-square in the several positions shown in the following diagram, Fig. 262, and which are also indicated in all the

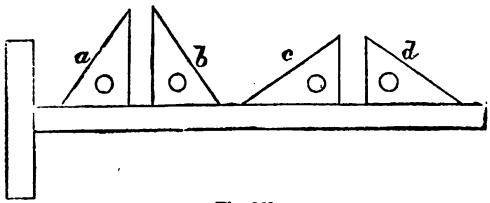

Fig. 262.

diagrams which follow, in the position suitable for drawing the lines of the relative angle of the light in the plans and side views of the objects, those in the front elevations being always at 45°.

The position of the set square *a*, Fig. 262, is suitable for drawing in the relative angle of the light in a plan placed either above or below the front view of the object on which the shadow is to be projected.

That in position *b* for the angle of light in projecting the shadow of a horizontal line on an inclined plane, &c.

That in position *c* for side views placed to the left of the object on which the shadow is to be projected.

That in position *d* for side views placed to the right of the object on which the shadow is to be projected.

In drawings of an engine, or other machinery containing different views of the one object, representing plans, elevations, side and end views, &c., it is the common practice to project all the shadows at the same angle as a matter of convenience. The shadows thus projected in one view have no relation whatever with the shadows of the view next to it, and on the same sheet of paper. In which case, each view must be considered as belonging to another object of similar construction and size, and all placed in the same light. It

would be quite unsatisfactory otherwise, as the following explanation will show. Let A, B, and C, Fig. 263, be the plan, front, and side elevations of three walls of parallel thickness at right angles to a plane. The shadows shown are projected in the ordinary manner in engineering drawings, all being at the angle of 45°, and also inclined at that angle. If the shadow in the front elevation B had any relation to the



Fig. 263.

shadow in the plan A, the part X in front elevation B would be all dark to correspond with the shadow from line of wall H in plan A, the front elevation of wall *e e* would also be correspondingly dark; the side view C would also be dark, corresponding to the shade side *l d* in plan A. The shadows thus carried out would never make a desirable drawing, and if left to choice, it would look better to produce an outline drawing only.

In Fig. 264, the shadows of the three views of the same object are projected in relation to each other, the diagonal *f g* being the same (45°) as in last diagram, and made equal to the length *x y* in plans A in each diagram, Figs. 263 and 264. It will be observed that the relative shadows in the plan A, Fig. 264, are at the opposite side of object, and at a different angle from that at Fig. 263 (that in the present example being the same angle as the one referred to at Fig. 260), and the end view C is dark, or in the shade, to correspond with the shadow projected by *l d* in plan A; and though it might be

convenient to have the shadows in plan to correspond thus with the front elevation, still, if C was also made to correspond, it would be as represented, all dark.



Fig. 264.

In the plans and front views of the following projections of shadows, though each series of diagonals in their respective views must be drawn parallel to each other, the distances between one couple and the couple next to them are not of necessity the same, except for uniformity of appearance, but they must agree relatively, those in the plan or side view with those in front elevation.

To project the shadow on a vertical cylinder of a circular flange which is at right angles to the axis of cylinder and projects equally around its circumference.

Let A, Fig. 265, be the front view of cylinder upon which the shadow of the flange *ef* is to be projected.



Fig. 265.

1. Draw a plan B of the cylinder and flange on a centre line common to both views, A and B.

2. With the set square bearing on the T-square in position E draw the relative angle of light in plan B as at *r s*.

3. From the point *r*, where the line *r s* cuts the outer circumference of flange in plan B, draw the vertical line *r x*.

4. From the point x, where the vertical line $r\,x$ intersects the flange $e\,f$, draw the ordinary diagonal in front view A.

5. From the point s in plan B, where the line $r\,s$ intersects the cylinder, draw a vertical line intersecting the diagonal from x at u; u will be one point for the shadow.

Proceed in the same manner for finding other points as at n, o, &c., through which a curve line passing will be the projection of shadow required.



Fig. 266.

NOTE.—In objects such as that described, when horizontal, as at Fig. 266, the process is almost the same, the only difference is, the shadow is at the opposite side to that at Fig. 265.

The following examples, Figs. 267 and 268, will be found useful for reference. The shadows being projected similarly to that at Fig. 265, further explanation will be unnecessary.

The plan of each object is above its respective front view, or elevation.

To project the shadow of a square flange on an inclined plane, the flange being at right angles to the plane and parallel to it.

Let A, Fig. 269, be the front view of the object on which the shadow of the flange $c\,d$ is to be projected, and B the side view at the required inclination. From the point e in side view B draw the relative angle of light intersecting the line $f\,g$ at h; from h draw the horizontal line $h\,k$, intersecting the side of front view A at l; from the point c in front view A draw the diagonal intersecting the line $k\,l$ in the point i; from any other point n in side of flange in front view A draw another diagonal line $n\,o$ parallel to $c\,i$; from n draw a horizontal line intersecting the under side of flange in side view B at p; from p draw a line parallel to $e\,h$ intersecting the line $f\,g$ at

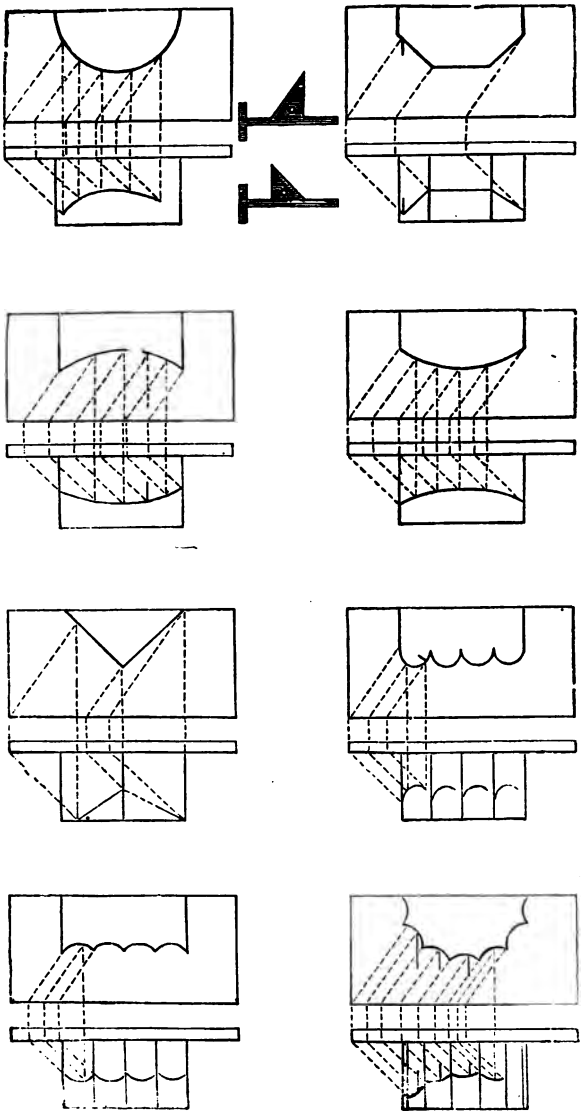

Fig. 267.

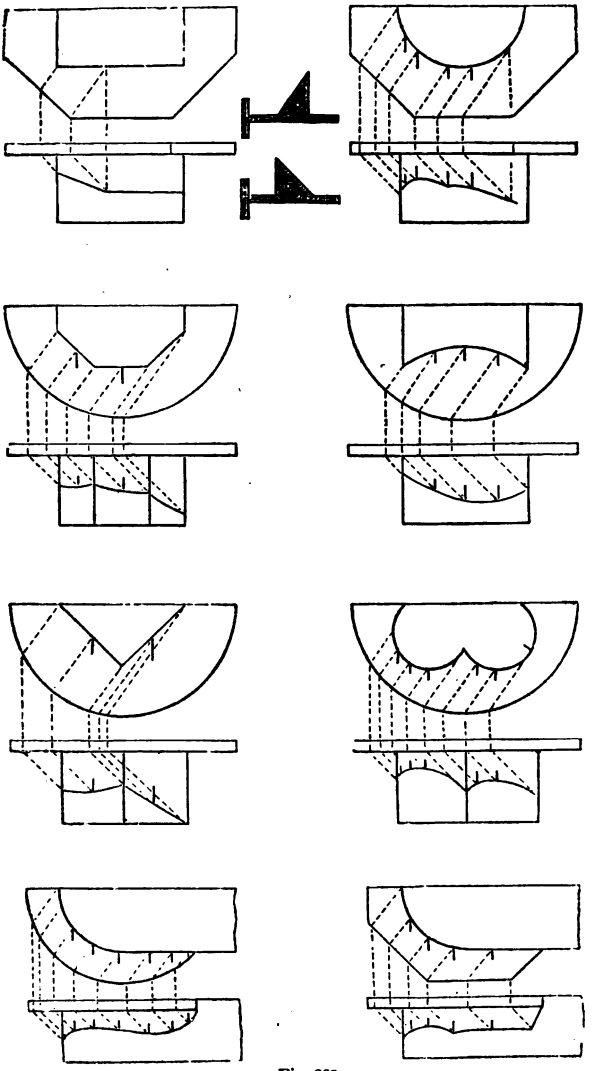

Fig. 268.

r; from *r* draw a horizontal line intersecting the line *n o* at *s*, and join *s i*, intersecting the side of object at *t*; *t i l* will be the projection of shadow required.

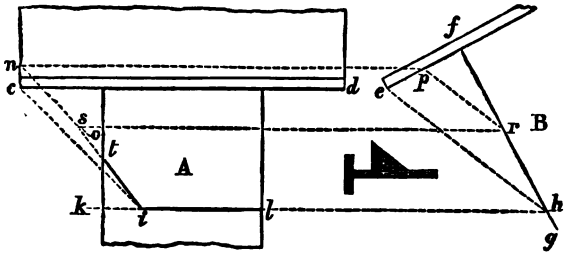

Fig. 269.

To project the shadow of a circular flange on an inclined plane, the flange being at right angles to the plane.

Let A, Fig. 270, be the front view of the object on which the circular flange *c d* is to be projected,* and B the side view at the required inclination. On front view A from any points *k*, *i*, *g*, on flange *c d*, draw the diagonals, and from the same points on flange *c d* in front view A draw the horizontal lines *k m*, *i n*, and *g o*, intersecting the side view of flange

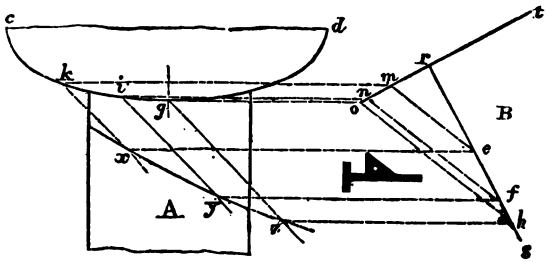

Fig. 270.

o t in side view B at *m*, *n*, and *o*; from the points *m*, *n*, and *o*, draw the relative angle of light towards the line of inclination *r s*, and from the points of intersection *e*, *f*, *h*, draw the horizontal lines intersecting their respective diagonals in

* To find the curves in this, and those which immediately follow, see Chapter XIII., Fig. 183.

front view A from k, i, and g, at x y z; through which points a curve line passing will be the projection of shadow required.

To project the shadow of a circular flange on an inclined cylinder, the flange being at right angles to the axis of the cylinder and equidistant from it.

Let A, Fig. 271, be the front view of the object on which the shadow of the flange n y is to be projected, and B a side view at the required inclination. Draw a plan C of the object on a centre line common to both views, A and C, as if it were a plan of a vertical cylinder, or as viewed in the direction e f in

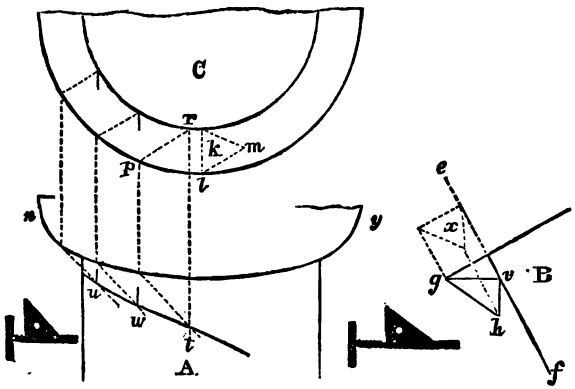

Fig. 271.

side view B. From the point g in side view B draw the relative angle of light; and (to render the process more explanatory) let the triangle g v h represent the side view, inclined, of a set square having the angle of 45°. Draw a plan of the triangle as shown at x, and transfer it to position k, in plan C; l m will be the relative direction of the light. Draw any number of lines p, r, &c., parallel to l m, and proceed in the same manner to find the points of the shadow as in example, Fig. 265. A curve line passing through these points, u, w, t, will be the projection of the shadow required.

NOTE.—The direction of the light, *l m* in plan C, is the same relative angle as in the other examples; it is observed in this instance in the same direction as the inclination of the cylinder, instead of being observed from a position vertical to the object as in the other examples.

To project the shadow of a round flange on a tapered (or conical) stuffing-box, the flange being at right angles to the axis of the cone and equidistant from it.

FIRSTLY, when in a vertical position, Fig. 272. Let A be the front elevation of the object on which the shadow is to be projected.

On a centre line common to both views, A and B, draw a plan B of stuffing-box and flange, on which draw the relative angle of light from any points on the circumference of flange, as at 1, 2, 3, &c. It is then required to draw lines on elevation A coincident severally with the relative angle of light, 1, 2, 3, &c., in plan B, and which lines will be curves in their front view. On elevation A, at convenient distances apart, draw the horizontal lines *d*, *e*, also their plans as indicated by the dotted circumferences in plan B. From the intersectional points of the angle of light with the several circumferences, as at *g*, *f*, &c., draw vertical lines intersecting their relative horizontal lines in elevation A at *h*, *i*, *k*, *l*, through which points draw the curve line. From the point 1 on circumference of flange in plan B draw a vertical line intersecting the lower edge of flange in elevation at *m*, from which draw the diagonal intersecting the curved line *l h* at *n*, which will be a point for the shadow; proceed in the same manner to find other points from the relative angle of light, 2, 3, 4, &c., as at *o*, *p*, &c., through which a curve line passing will be the projection of shadow required.

SECONDLY, when inclined, Fig. 273. Let C be the side view of the object at the required inclination, from which is drawn a corresponding front elevation A and plan B; proceed exactly as in the other, Fig. 272, and, as shown by the dotted lines, a

curve line passing through the points *n*, *o*, *p*, &c., will be the projection of shadow required.

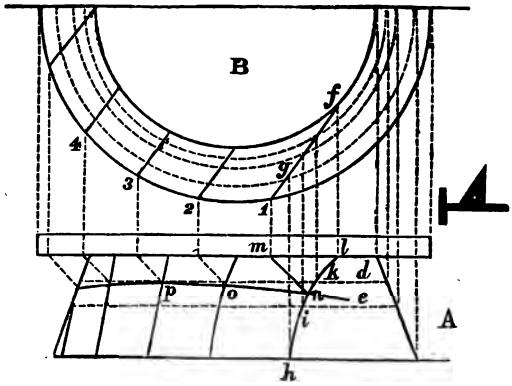

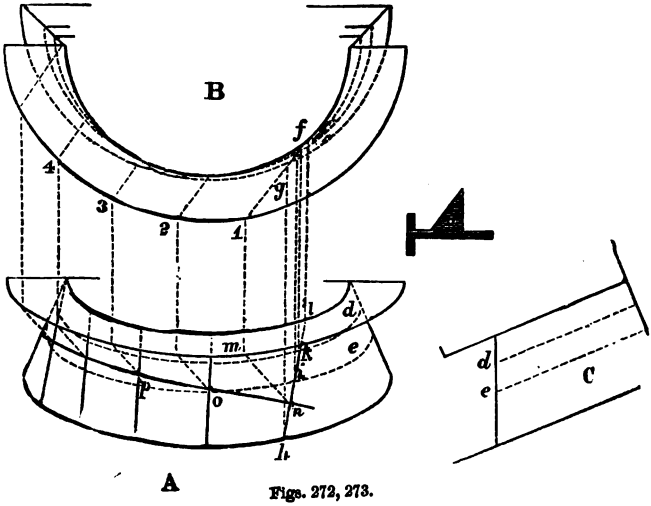

Figs. 272, 273.

To project the shadow of a bracket on a convex or a concave surface.

Let A in Fig. 274 be a convex, and in Fig. 275 a concave surface. (As the same process applies to both Figs. the reference letters are the same in each.) Draw plans B and side

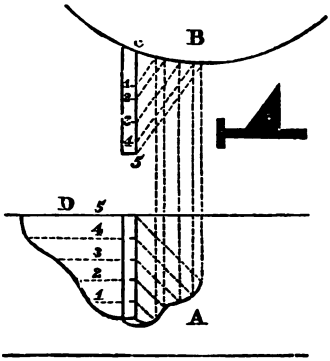

Fig. 274.

views D of the bracket, the latter adjoining the front view. Divide the side view D by any number of horizontal lines. On the right-hand side of bracket in plan B, from the point *c*, set off the lengths of the dotted divisional lines of bracket,

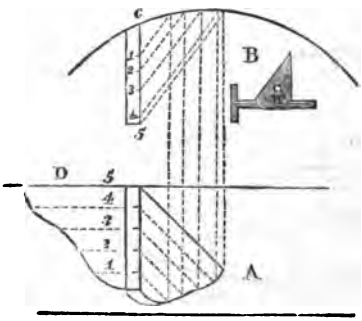

Fig. 275.

making *c*-1 equal to the length of the line 1 in side view D, *c*-2 equal to the length of the line 2 in side view D, and so on

with each line on D. From the points opposite the divisional lines on D, on the right-hand side of the bracket in front view A, draw the diagonals, and from the points 1, 2, 3, &c., on bracket in plan B, draw lines for the relative angle of light; from the points where they intersect the curved surfaces in plan B draw vertical lines intersecting their corresponding diagonals on front view A. A curved line passing through the points of intersection will be the projection of shadow required.

NOTE.—The same process may be repeated for the lower part of left-hand side of bracket; though to trace the lower part already projected, and to transfer it to the part required, is a quicker process, and the one generally adopted in actual practice.

To project the shadow of a cylinder on a plane parallel to the axis.

Let A, Fig. 276, be the elevation of cylinder, and B the plane on which the shadow is to be projected. Draw a plan *c d* of the plane; on the centre line of cylinder A produced to *h*, with half the diameter of cylinder A as a radius, and at its required distance *i h* from the plane, draw a plan C of the cylinder. On plan C draw the relative angle of the light, as shown by the parallel lines *l t*, &c. From the points *l x*, &c., where the lines *t l*, *w x*, &c., intersect the circumference of the cylinder C, draw vertical lines intersecting the top *k e* of cylinder A at *o*, *y*, &c.; from the intersectional points *o y*, &c., on the line *k e*, draw the diagonal lines; from the point *t* in the line of plane *c d* draw a vertical line intersecting the diagonal line drawn from *o*, at *r*, and from the point *u* in line of plane *c d* draw a vertical line intersecting the diagonal drawn from the point *n* at *s*; *r s* will be the breadth of the shadow of the cylinder on the plane B. From *w*, in the line of plane *c d*, draw a vertical line intersecting the diagonal drawn from *y* in the line *k e* at *z*, which will be a point of projection of the shadow of the top of the cylinder. Proceed

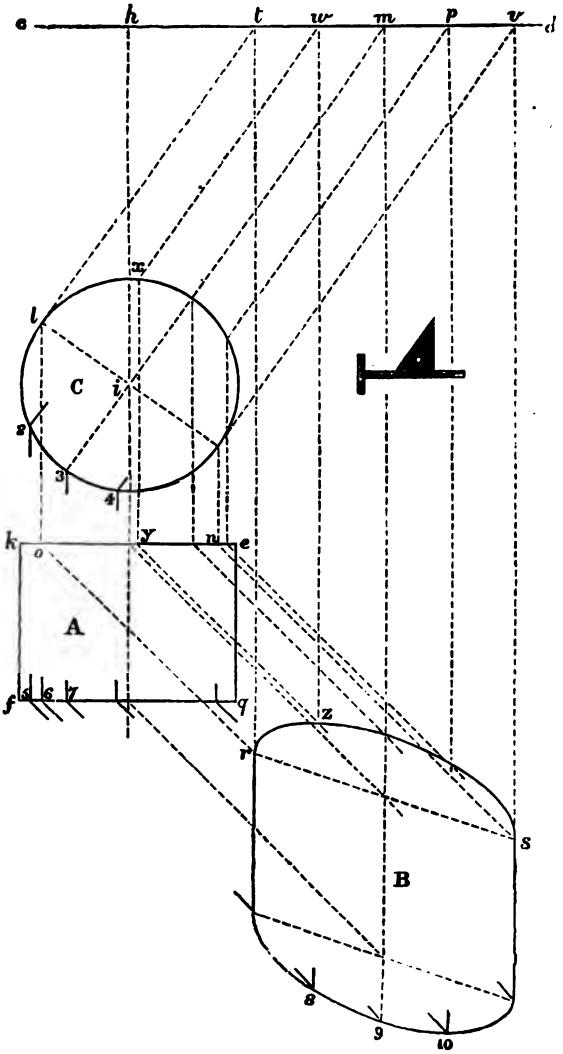

Fig. 276.

in a similar way for finding the other points, as shown by the dotted lines; a curve line passing through the points will be the projection of shadow of top of cylinder.

To project the shadow of lower end of cylinder.

Produce the lines *w x*, &c., in plan C, so as to intersect the circumference of cylinder at 2, 3, 4. From the points 2, 3, 4, draw vertical lines intersecting the lower line *f g* in elevation A of cylinder at the points 5, 6, 7 respectively, and from these points draw diagonal lines parallel to *o r*, &c. From the points *w*, *m*, *p*, in the line of plane *c d*, draw vertical lines, intersecting their corresponding diagonals drawn from the points 5, 6, 7, at 8, 9, 10, and a curve line passing through the points will be the projection of shadow of lower end of cylinder, completing the projection of shadow required.

NOTE.—In projecting shadows such as that described on a larger scale than that shown in diagram, Fig. 276, more points for the curves would be required to insure accuracy; these are obtained by multiplying the diagonals, &c.

To project the shadow of a horizontal on a vertical cylinder.

Let A, Fig. 277, be the horizontal cylinder in its position, and B the vertical cylinder, upon which the shadow of horizontal cylinder A is to be projected. Draw a side view C of the vertical cylinder, and an end view D of the horizontal cylinder, at its required distance from C. Draw the ordinary centre lines in each view of the vertical cylinder. Divide the lower part of each view of the vertical cylinder B and C by any number of horizontal lines 1, 2, 3, &c., identical in each view. (It will facilitate the process if the lines are equidistant.) From the end view D of the horizontal cylinder, tangentially to its circumference, draw the relative angle of the light *e* and *f*, intersecting the horizontal lines 1, 2, 3, &c., at *k l* and *m n*. Draw a half plan E of the vertical cylinder C. From the points *k* and *l* draw vertical lines intersecting the

half plan E at q and s. From the points g and h, where the relative angle of the light e and f intersects the cylinder C, draw the horizontal lines $g\ v$ and $h\ u$, intersecting the centre line of cylinder B at v and u, which are the upper and lower points of projection of shadow. On the horizontal lines 1 and 4 in view B set off the distances $o\ p$ and $o\ w$ on each side of centre line, each equal to the length $r\ q$ in half plan E; and on the horizontal lines 2 and 5 in view B set off the dis-

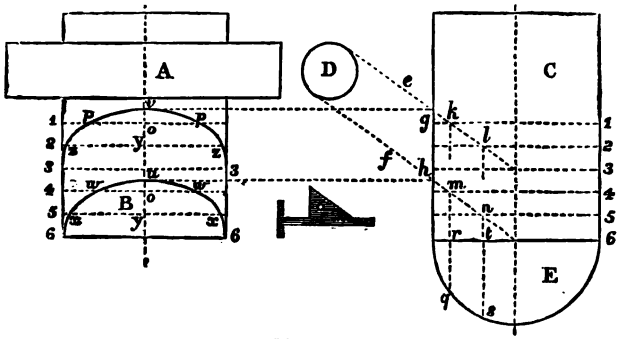

Fig. 277.

tances $y\ z$ and $y\ x$ on each side of centre line, each equal to the length $t\ s$ in half plan E. As the lines e and f terminate at the centre line in view C at the horizontal lines 3 and 6, so in front view B the extremities of the lines 3 and 6 will be points for the shadow, and a curve line passing through the points 3 $z\ p\ v$ and 6 $x\ w\ u$ will be the projection of shadow required.

Another method.—On the centre line k, Fig. 278, in vertical cylinder B, with radius equal to half of the diameter of cylinder, describe from p as a centre the semicircle $f\ m\ g$; and with the same radius, on centre line l in side view C, from i as a centre, describe the quarter circle $h\ n$. Draw the relative angle of the light e, f, as in previous example, from the horizontal cylinder D.

Divide the quarter circles $f\ m$, $m\ g$ in front view B, and

also the quarter circle *h n* in side view C, each into the same number of equal parts, and from the divisional points in each quarter circle draw the vertical lines as shown in views B and C; from the points in view C, where they intersect the

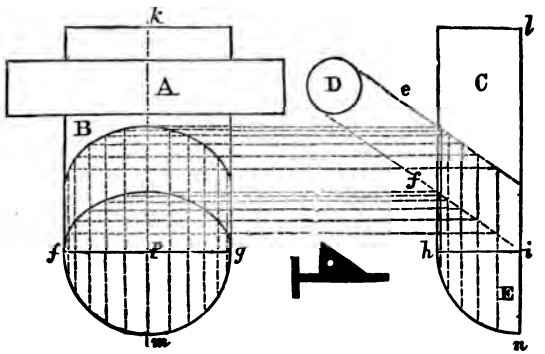

Fig. 278

relative angle of the light *e* and *f*, draw horizontal lines, intersecting their corresponding vertical lines in view B; a curve line passing through the points thus found will be the projection of shadow required.

To project the shadow of a less on a greater cylinder, both being vertical.

Let A, Fig. 279, be the small cylinder, and B the greater, upon which the shadow is to be projected. Draw a half plan C of the larger cylinder, and a plan D of the small cylinder at its distance from the greater.

From the point *l* draw the relative angle of the light *l m* tangentially to cylinder D. From the point *l* draw a vertical line *q*, intersecting the lower line of smaller cylinder A, at *r*; from *r* draw the diagonal; and from the point *m*, which is the intersection of the relative angle of the light with the circumference of larger cylinder C in half plan, draw a vertical line *m g*, intersecting the diagonal from *r* at *n*; *n g* will

be the projection of the shadow of the side of smaller cylinder A. On plan of cylinder D draw lines parallel to *l m*, as at *e*, *o*, *k*; from *o*, &c., draw a vertical line intersecting lower line of cylinder A at *s*; from *s* draw the diagonal, parallel to *r n*; from the intersectional point *p*, in half plan C, draw a vertical line, intersecting the diagonal drawn from *s* at *t*; *t* will be a point in the projection of shadow. Proceed in a similar manner to find other points, as at *f* and *h* on cylinder B; a curve line passing through *n*, *f*, *t*, *h*, with the vertical line *g n* will be the projection of shadow required.

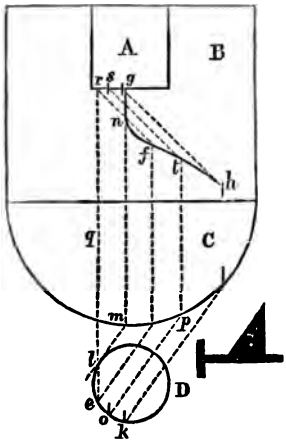

Fig. 279.

NOTE.—It will be observed that the shadow from the smaller cylinder when placed in such position as given in example, does not show a boundary line to the right of the larger object; if the smaller cylinder were placed more to the left side of the larger one the shadow would have a defined line to the right.

In cylinders of various diameters adjacent, the process for projecting the shadow of any one upon the next is similar to that already described, whether vertical or horizontal. In the latter, the only difference would be in the shadow being towards the opposite side to that in Fig. 279.

To project the shadow of a disc on a cylinder; the former in a vertical and the latter in a horizontal position.

Let A, Fig. 280, be the side view of the cylinder upon which the shadow is to be projected, and B the disc. Draw an end view C and D of the objects at their distance. From any point *e*, on circumference of disc B, draw the horizontal line *i* to the edge view D of disc, intersecting it at *t*; from the point *e* in disc B

draw the diagonal; from the point t, in edge view of disc D, draw the relative angle of light, intersecting the circumference of cylinder C at u; from the point u draw the horizontal line f, intersecting the diagonal drawn from e at the point x, which will be a point in the projection of the shadow.

From any other points, as at k and p, in edge view of disc D, draw lines parallel to $t\ u$, intersecting the cylinder C at h and q, and from k and p draw the horizontal lines m and n,

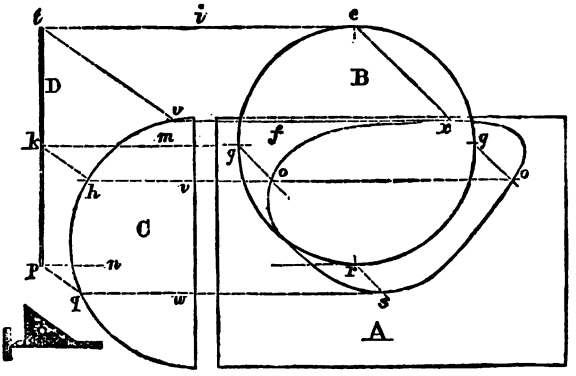

Fig. 280.

intersecting the disc B at g and r; from g and r draw the diagonals parallel to $e\ x$; from h and q draw the horizontal lines v and w, intersecting the diagonals drawn from g and r in disc B, at o and s. A curve line passing through the points x, o, s, o, will be the projection of shadow required.

NOTE.—As in other examples, if the cylinder were placed vertically, with the disc in the same relative position to it, the process would be similar, the shadow being on the left-hand side of disc.

To project the shadow of the square thread of a common screw on the inner surface, the position being vertical.

Let A, Fig. 281, be the body of screw on which the shadow

is to be projected. Draw a plan B of the object. From any point *d*, on lower edge of thread in front view A, draw the diagonal; also from *d* draw a vertical line, intersecting the plan of the thread at *e*; from *e* draw the relative angle of the light, intersecting the inner circumference at *f*; from *f* draw a vertical line, intersecting the diagonal drawn from *d* in front view A at *g*, which will be a point in projection of shadow.

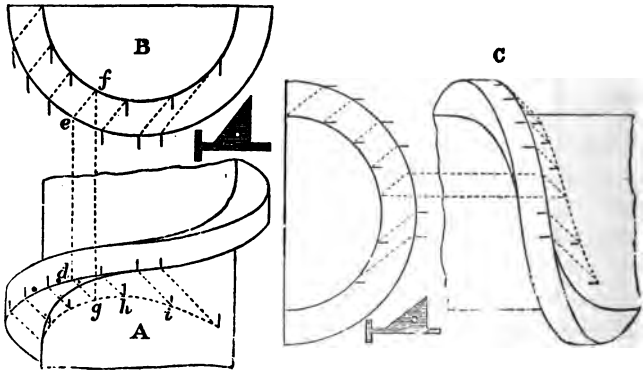

Fig. 281.

Proceed in a similar manner to find other points as at *h*, *i*, &c., through which a curve line passing will be the projection of shadow required.

NOTE.—When the screw is in a horizontal position, as shown at C, the process is the same, the shadow being projected towards the opposite end, the diagonals being in the opposite direction relatively to the thread shown at A and B just described. The light is in the same direction, but the thread being more directly opposite the light, the curve of shadow, as will be observed, is not the same as when the object is vertical. The process in either position is the same as at Figs. 265, 266.

To project the shadow in a vertical half cylinder, having its upper end at right angles to its axis.

Let A, Fig. 282, be the front view of the object on which the shadow is to be projected.

Draw a plan B of the object; from the point *c*, in front view A, draw the diagonal; from the corresponding point *h* in plan B draw the relative angle of light, intersecting the inner circle at *n*; from *n* draw the vertical line *n p*, intersecting the diagonal drawn from *c* at *o* in front view A; *o p* will be the projection of the shadow of the side *c d* of cylinder.



Fig. 282.

In plan B draw a tangential line *r s*, parallel to *h n*, the point of contact being *u*; from *u* draw a vertical line, intersecting the upper end of front view A at *v*; draw any other line, as at *x*, parallel to *h n*; from the point of intersection *f* draw a vertical line *t*; from the point of its intersection with upper line of cylinder A draw the diagonal *y* parallel to *c o*; from the point of intersection of *x* at *e* in plan B draw a vertical line, intersecting the diagonal *y* at *z*; *v*, *z*, *o*, *p* will be the projection of shadow required.

NOTE.—The process is the same when the object is horizontal, the shadow being in the opposite side to that at Fig. 282.

To project the shadows in vertical half cylinders having flat, convex, or concave covers, at right angles to the axis of cylinders.

(As the process is similar in each example the reference letters apply to either.)

Let A, Fig. 283, be the front view of the object on which the shadow is to be projected.

Draw a plan B of the object.

From *c* in front view A draw the diagonal *c d*; from the

corresponding point *m* in plan B, draw the relative angle of the light; from the point *n* in plan B, where the line *m n* intersects the inner circle, draw a vertical line *n p*, intersect-

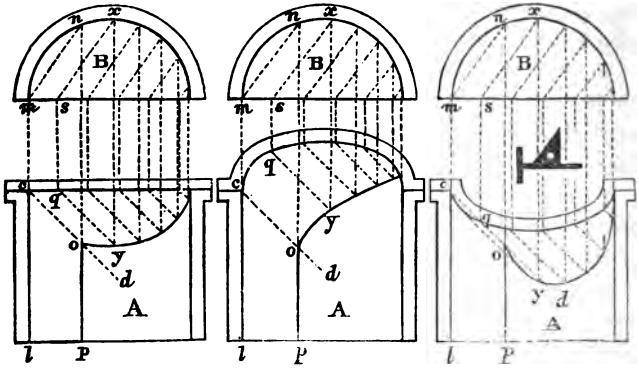

Fig. 283.

ing the diagonal *c d* in *o*; *o p* will be the projection of the shadow of the side of cylinder *c l*.

In plan B draw any number of lines, as *s x*, parallel to *m n*; from the point *s* in plan B draw a vertical line, intersecting the lower line of cover at *q*; from *q* draw a diagonal parallel to *c d*; from the point *x* in plan B draw a vertical line, intersecting the diagonal drawn from *q* in view A at *y*, which will be a point in the projection of shadow of the cover; find other points similarly, through which a curve line passing will form, with the shadow of side of cylinder already found, the projection of shadow required.



Fig. 284.

In projecting the shadow of the circumference of cover in a half cylinder, as at Fig. 284, the process is the same as at Fig. 283, just described.

To project the shadows in inclined half cylinders.

Let A, Fig. 285, be the section of a cylinder, having its cover *q r* in a line with the light, and B the section of a cylinder having its cover at right angles to the light; the covers of each cylinder being at right angles to its axis.

On *e* as a centre, in the line *q r*, on the centre line of cylinder *g f*, describe a semicircle *c g n*, representing a plan of half cylinder A. Draw the diagonal *c g*, from which it will be obvious that the shadow projected by the side of the

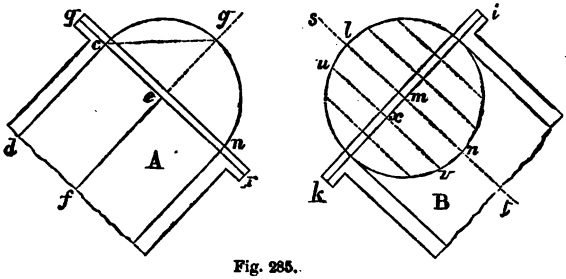

Fig. 285.

cylinder *c d* will fall on the centre line *g f*, and, as the line of cover *q r* is its own diagonal, there is no projection of shadow except at *e f*.

In cylinder B, on the intersectional point *m* as a centre, in the line *i k*, and centre line *s t*, describe a semicircle, to represent a plan of half cylinder B; draw the divisional lines at right angles to the line *i k*, as shown; make the length *m n* equal to the distance *m l*, and *n* will be a point in the projection of shadow. Also make *x v* equal to the distance *x u*, and *v* will be another point for the shadow. It will thus be quite obvious that the shadow will be a semicircle, similar to the plan of half cylinder B. There is no projection of shadow from the sides of cylinder B. The line *e f* in cylinder A, and semicircle in cylinder B, being the projections of shadows required.

To project the shadow of the end of a hollow cylinder which

*is at right angles to its axis, on an inclined plane within the cylinder.**

Let A, Fig. 286, be the end view of cylinder, and B the inclined plane upon which the shadow is to be projected.

Draw a side view (or longitudinal section) C of the objects. From any point *d* in end view A draw the diagonal *d e*;

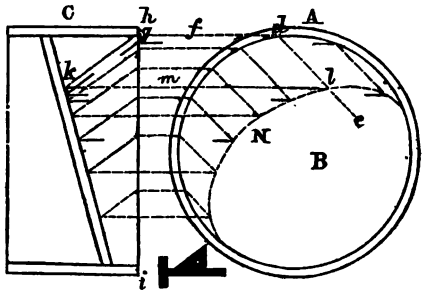

Fig. 286.

from *d* draw the horizontal line *f*, intersecting the line *h i* at *g*; from *g* draw the relative angle of light, intersecting the inclined plane at *k*; from the point *k* draw the horizontal line *m*, intersecting the diagonal *d e* at *l*, and *l* will be a point in the projection of the shadow. Find other points similarly, through which a curve line N passing will be the projection of shadow required.

To project the shadow of a horizontal straight object upon an inclined plane.

Let A, Fig. 287, be the plan of the inclined plane upon which the shadow of the horizontal object *c d* is to be projected. Draw a side view B of the objects, *h i* being the side view of straight object, and *h t* of the inclined plane. In plan A, from any point *e*, on the line *c d* (the farther to the right such point is chosen the greater the depth of the inclination, and the more correct the result is likely to be),

* This projection is similar to that produced by the open end of a steam pipe on a throttle valve.

draw the diagonal $e\ f$; from the point e draw a vertical line $e\ g$, intersecting the line $h\ i$, in side view B, at g; from g draw the relative angle of light $g\ p$, intersecting the plane $h\ t$ at p; from p draw a vertical line, intersecting the diagonal $e\ f$

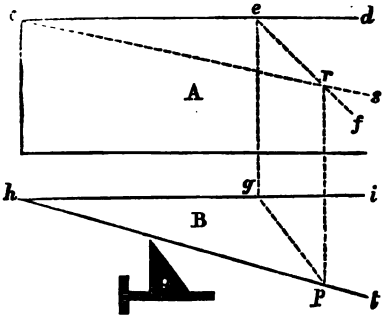

Fig. 287.

in plan A at r; from the point c in plan A, and through the point r, draw the line $c\ s$, which will be the projection of shadow required.

NOTE.—If the objects were vertical the projection of shadow would be found by the same process; the shadow being at the opposite side to that at Fig. 287.

*To project the shadows of paddle floats on a plane adjacent and at right angles to their central axis.**

Let a, Fig. 288, be the end views of the floats, and D the plane on which the shadows are to be projected. From a draw the diagonals; set off the length $a\ b$, equal to the distance of lower end of float from the plane; set off the length $b\ c$ equal to the length of float; draw $b\ f$ and $c\ g$ each parallel to $a\ e$. Proceed in the same manner with the others for the projection of shadows required.

* This and the following diagram, Fig. 289, in one sense belong to the first series of shadows, and the diagrams Figs. 290 and 291 to the second series. But as the four diagrams are different views of the same object it will be found more convenient to arrange them as here.

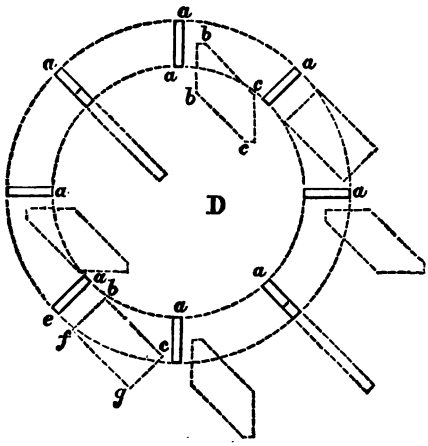

Fig. 288.

To project the shadow of a paddle ring on a horizontal plane (or float).

Let A, Fig. 289, be a plan of the float on which the shadow of the ring x is to be projected.

Draw a side view B of the objects. Divide the float f in view B into any number of parts, as at 1, 2, 3, &c.; from these points draw vertical lines, intersecting the inner and outer circumferences of ring; produce these lines to plan of ring in view A, intersecting it at 5, 6, 7, &c.; from the points on lower side of ring d e draw the diagonals; set off the length 5 s equal to the height 1 a in side view B, and s will be a point for the shadow of the outer circumference of ring. Proceed in a similar manner to find other points, through which a curve line k passing will be the projection of the shadow of the outer circumference of the ring.

From the points in the upper side of the ring g h in plan A, where the vertical lines intersect it, draw the diagonals; set off the length m n equal to the height 3 c in side view B, and n will be a point for the shadow of inner circumference of

ring. Proceed in a similar manner to find other points, through which a curve line p passing will be the projection

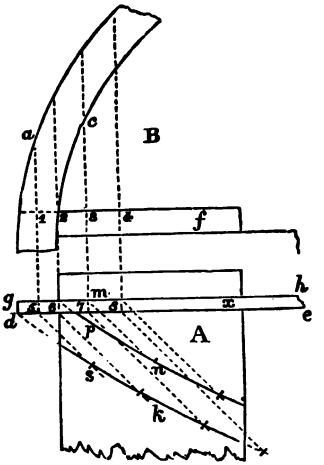

Fig. 289.

of shadow of inner circumference of ring, and which, with the curve for outer circumference k, will be the projection of shadow required.

To project the shadow of a paddle ring on an inclined plane (or float in an inclined position).

Let A, Fig. 290, be a plan of the float on which the shadow of the ring x is to be projected.

Draw a side view B of the objects. From any point c on the lower edge of ring $d\ e$ in plan A, draw the diagonal; from c draw a vertical line f, intersecting the outer circumference of ring in side view B at k; from k draw the relative angle of light, intersecting the upper line of float at l; from l draw a vertical line, intersecting the diagonal drawn from c in plan A at m, and m will be a point for the shadow of the outer circumference of the ring. Proceed in a similar manner to find other points, through which a curve line c

passing will be the projection of shadow of outer circumference of ring.

From the point t in side view B, where the relative angle of light intersects the inner circumference of the ring, draw a vertical line u, intersecting the upper line of ring $g\ h$ in plan A

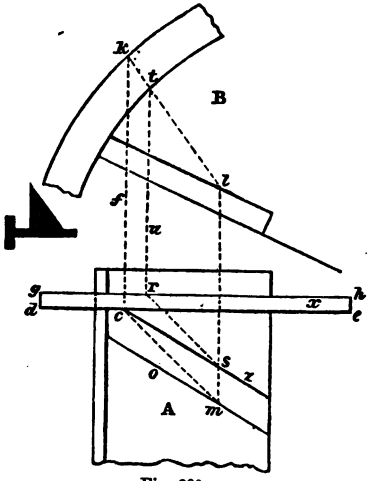

Fig. 290.

at r; from r draw the diagonal, intersecting the line drawn from l at s, and s will be a point for the shadow of inner circumference of ring. Proceed in a similar manner to find other points, through which a curve line z passing will be the projection of shadow of inner circumference of ring, and which with the curve for outer circumference o, will be the projection of shadow required.

To project the shadow of a paddle float on another adjacent, both being inclined.

Let A, Fig. 291, be a plan of the objects. It is re-

quired to project the shadow of upper float C on the lower float D.

Draw a side view B of the objects. From the point *e* in plan of float C draw the diagonal; from the point *k* in side view B, corresponding to *e* in plan, draw the relative angle of light, intersecting the upper line of lower float at *n*; from *n* draw a vertical line *n p*, intersecting the diagonal drawn from *e* at *o*; *o p* will be the projection of the shadow of edge *e g* of the upper float C.

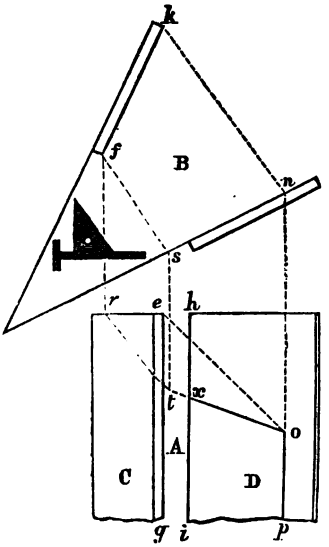

Fig. 291.

In upper float C in plan A, from the point *r* (which coincides with the point *f* in side view B) draw the diagonal; from the point *f*, in upper float in side view B, draw the relative angle of light, intersecting the upper line of the lower float at *s*; from *s* draw a vertical line, intersecting the diagonal drawn from *r* in plan A at *t*; join *t o*, intersecting the line of float *h i* at *x*; *x o*

will be the projection of the shadow of the end of float *r e*, and, with *o p*, will be the projection of shadow required.

To project the shadow of a rectangular vertical object on a spherical body.

Let A, Fig. 292, be the front view of the sphere upon which the shadow of the rectangular object *e f* is to be projected.

Draw a plan B of the objects. Draw the centre line *i k* in both views A and B. Divide *e f* in front view into any number of parts, as at 1, 2, 3, from which points draw the diagonals *e x*, &c.; through the centre *c* of sphere A draw a line *l m* at right angles to the line *e x*. On the plan of sphere B draw the ellipses, or plans, *n*, *o*, &c., of the oblique sections *x* of sphere A,* in each of which the major axis will be on a vertical line drawn from the point of intersections of the line *l m* and the sectional line *x* in front view A. A part only of each ellipse is sufficient, as shown. From the point *h* in plan B, corresponding to *e* in front view A, draw the relative angle of light *h p*, intersecting the ellipses *n*, *o*, &c., in the points *y*; and from the points *y* draw the vertical lines *r*, *q*, &c., intersecting the corresponding diagonals from *e*, &c., in front view A, at *s*, *t*, *u*, &c. Through these points a curve line passing will be the projection of shadow required.

Another method is as follows:—Draw horizontal lines across the front view of sphere A; and from the centre of plan of sphere B draw circles of diameters corresponding to the lengths of the horizontal lines in front view A; from the points where the relative angle of the light *h p* intersects the circles in the plan B draw vertical lines intersecting the corresponding horizontal lines in front view A. A curve line drawn through the intersectional points will be the projection of shadow.

To project the shadow of a vertical disc on a spherical body.

* The ellipses are found as described in Chapter XIII., Fig. 183.

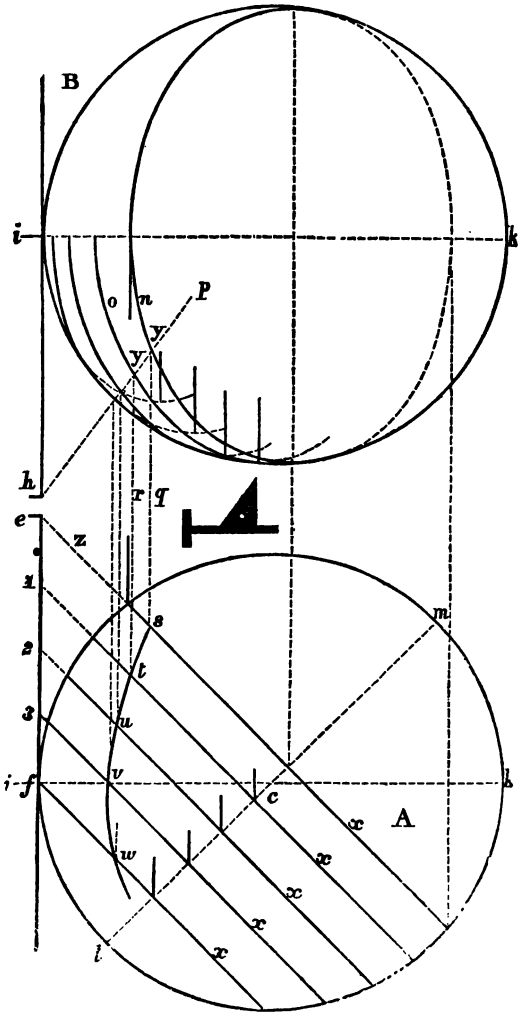

Fig. 292.

Let A, Fig. 293, be the front view of the sphere upon which the shadow of disc *f d*, is to be projected.

Draw a plan B of the objects. Draw the centre line *i k* in

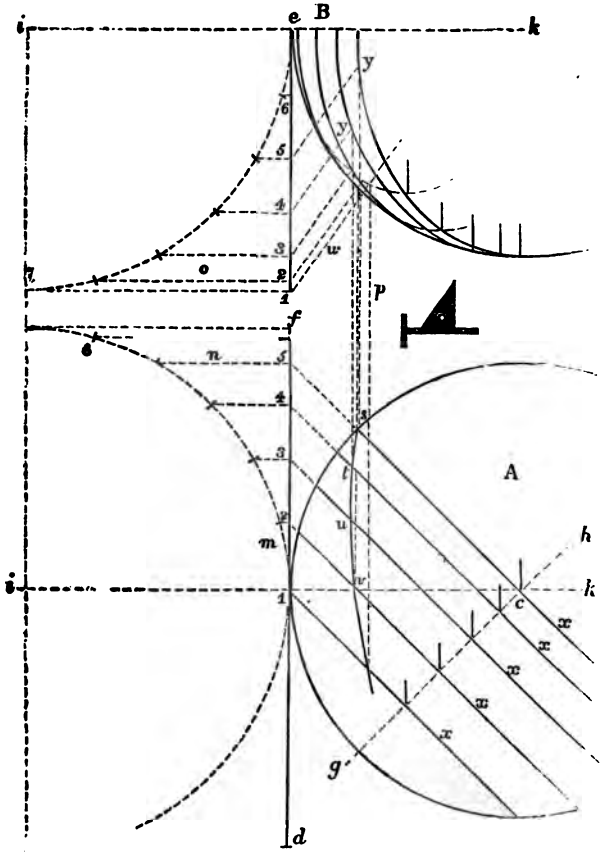

Fig. 293.

both views A and B. On each centre line *i k*, with half the diameter of disc as a radius, describe a part of a circle, representing as much of the circumference of disc as is

necessary for projecting the required shadow, as the quadrants *l* and *m* in views A and B, *l* in plan B being in the relative position to *m* in front view B. Divide each quadrant into, say six equal parts; from the divisional points draw the horizontal lines *o* and *n*, &c., in each view A and B, intersecting the plan 1 *e*, and front view *f d* of disc, at 2, 3, 4, &c.; from these points on disc *f d* in front view A, where the horizontal lines intersect it, draw the diagonals 5 *x*, &c.; through the centre *c* of sphere A draw a line *g h* at right angles to the line 5 *x*. On the plan of sphere B draw the portions of ellipses, as shown, being plans of the oblique sections *x* in front view of sphere A, in each of which the major axis will be on a vertical line drawn from the points of intersections of the line *g h* and the sectional lines *x* in front view A. From the point 1 in plan B (corresponding to 1 in front view A) draw the relative angle of light *w*; from the points 2, 3, 4, &c., draw lines parallel to *w*, intersecting their corresponding ellipses in *y*; from the points *y* draw vertical lines *p*, intersecting their corresponding diagonals from 1, 2, 3, &c., in front view A at *s*, *t*, *u*, &c.; through which points a curve line passing will be the projection of shadow required.

To project the shadow of an elongated sphere on a plane parallel to its axis.

Let A, Fig. 294, be the front view of sphere, and M the plane on which the required shadow is to be projected.

Draw a plan B of the object, and a straight line *c d* to represent a plan of the plane M.

FIRSTLY, In plan B, from the centre *e* of the object, draw the relative angle of light *e f*.

SECONDLY, Through the centre *e* draw a centre line *g h* at right angles to the line *e f*, and upon it draw another view I of the object A. On this view it is required to find a sectional line which will divide the light from the dark side of the object, for which purpose it is necessary to project the rela-

tive angle of light *l n** and *s t*, each tangentially to the object, at *r* and *u* respectively. Draw a straight line *r u* between the tangential points, which will be the side view of the section required.

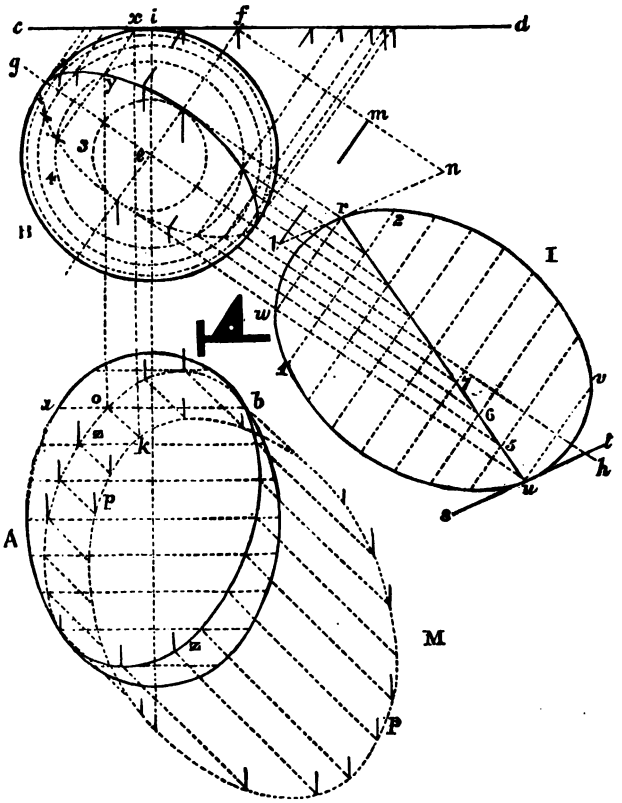

Fig. 294.

* *l n* represents the entire length of the line *e f*, which in view B is observed (as in the other diagrams of this second series) in its oblique position.

The length of the line *l m* in view I is equal to the length of the line *e f* as shown, and parallel to it; the distance *m n* is equal to *i f* in plane *c d*. The angles *m l n* and *i e f* are therefore obviously dissimilar in the views B and I.

THIRDLY, From the points *u* and *r* draw the lines *u v* and *r w*, each at right angles to the centre line *g h*, and divide the space between these lines by a number of parallels (equal parts on either side of the centre of the length of the object are more convenient in this instance, as, both ends of the object being similar, one series of corresponding circles in plan will prevent confusion).

FOURTHLY, Transfer these divisional lines from side view I to front view A.

FIFTHLY, On the plan B of object, from the centre *e*, with radii equal to the halves of the diameters of the transverse sections *a b*, &c., in front view A, draw the circles 3, 4, &c., and from the points 5, 6, 7, &c., in side view I, draw lines parallel to the centre line *g h*, intersecting their relative circles in plan B. A curve line drawn through the points of intersection will be a plan, in its oblique position, of sectional line *r u* in side view I. From the same points of intersections in plan B vertical lines to the respective transverse sections *a b*, &c., in front view A, will give intersectional points, through which a curve line Z drawn will be the front view, in its oblique position, of the section *r u* in side view I.

SIXTHLY, On plan B, from the points in the circles intersected by the curve, draw the line *y x*, &c., parallel to *e f*, intersecting the plane *c d* in the point *x*.

SEVENTHLY, From the intersectional points of curve Z with transverse sectional lines *a b*, &c., in front view A, draw the diagonals.

From the point *x*, in plan B, draw a vertical line, intersecting the diagonal drawn from the intersectional point *o*, in front view A, at *k*; *k* will be a point in the projection of the shadow. Having similarly found a sufficient number of points, a curve (P) passing through them will be the projection of shadow required.

NOTE.—The process just described is equally applicable in projecting the shadows of objects of a similar kind at any

moderate distance from the plane on which the shadow is to be projected.

To project the shadow of a ring of circular section on a plane at right angles to it.

Let A, Fig. 295, be the side view of the ring, and B the plane on which the shadow is to be projected.

Draw a straight line *s t* to represent a plan of the plane B. Draw a plan C of the ring at its distance from the plane *s t*. On plan C draw the relative angle of light *e f*; and, from its intersectional points *x* with outer and inner circumferences of the ring, draw vertical lines *v*, which for each side of the individual section will be the width or minor axis of elliptical sections in side view A.

Describe the ellipses *g* and *h*.*

Draw the diagonals *i k* tangentially from *g* and *h*. From the point *f* in the plane *s t* draw a vertical line, intersecting the diagonals drawn from *h* at *o* and *n*; and from *g* at *m* and *l* on the plane B respectively; *o*, *n*, and *m*, *l*, will each be points in the projection of the shadow. Proceed in the same manner for finding other points by drawing lines as at *p r*, &c., parallel to *e f*, in plan C; curve lines passing through the points found will be the projection of shadow required.

NOTE.—In projecting such a shadow on a larger scale, a good many sections would be required to ensure accuracy, and these would produce much confusion from the multiplicity of the sectional lines and ovals. But this confusion may be obviated. Having drawn the permanent side view, as at A, Fig. 295, make as many side views with their plans, of the same size, separately in pencil, as there are to be sections, the sections obviously in all the views being dissimilar. Having thus projected the points under each view from its section, trace an outline of a side view; place it above each of the other side views and trace the several pro-

* See Figs. 183 and 257.

jected points found on each, under the one side view on the tracing. The tracing can be placed on the permanent drawing, and the points on the tracing pricked through; or, by first marking the points with a soft pencil on under side of

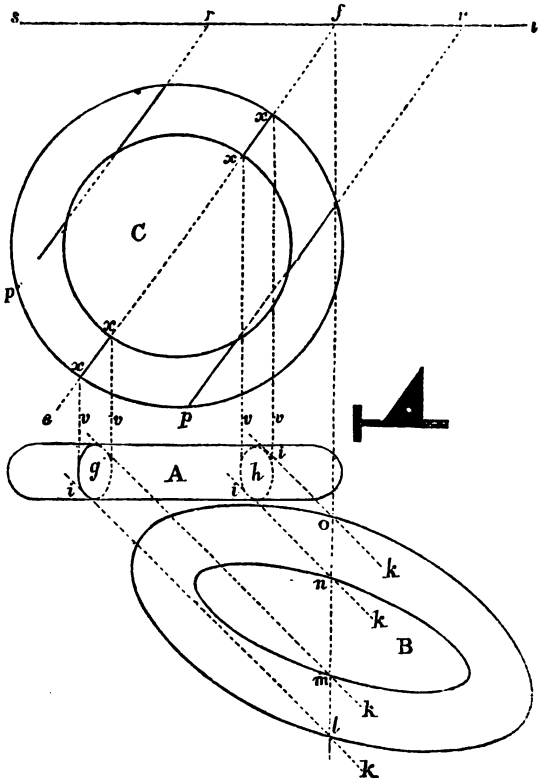

Fig. 295.

tracing paper, placing it in position and rubbing over the top side, there will be left a sufficient mark on the paper to enable the curve lines to be drawn in, giving projection of shadow required.

To project the shadow of a half ring (or elbow pipe) of circular section on a plane at right angles to it, either horizontal, as in last example, or vertical, as in subjoined diagram, Fig. 296.

The same process is followed exactly as described at Fig. 295—A, Fig. 296, being the front view of the ring, B the plane on which the shadow is to be projected, and C the face view of the object.

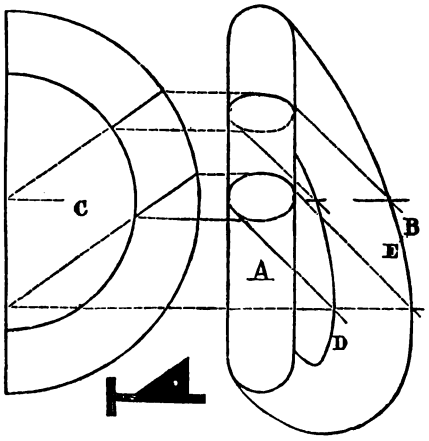

Fig. 296.

The curve lines D and E are the projection of shadow.

Projections of shadows of other objects might be given and multiplied almost indefinitely, but for all ordinary engineering purposes those given in this chapter will be found amply sufficient.

NOTE.—Before shading, the extraneous pencil lines for finding the several points in the projections of the shadows, and which should always be drawn very lightly, must be rubbed out carefully, so as to save the line of shadow only.

CHAPTER XVI.

SHADING AND COLOURING.

THE eye is naturally educated to recognise the form and distance of the objects which surround us from their lights and shades. The draughtsman's effort in shading is to deceive the eye by representing shadows as well as objects on the flat surface, thus making the latter appear to stand out in relief. The more perfect, therefore, the lights and shadows on the drawing, the more natural it will appear.

Any degree of taste and finish may be put into a shaded and coloured mechanical drawing, depending upon whether it is for working to, as a design, or for a picture, and whether such drawing is required quickly or not. It is hardly possible to make a first-rate, highly-finished shaded drawing quickly, though much depends, of course, on the ability of the manipulator, correctness being, in all cases, the first essential.

Summer is the worst part of the year for shading, the paper being so dry. Winter will be found always best for this operation, as under any circumstances the paper is damp.

Having a holder of the proper length (Chapter VI.), with proper sized brushes, one on each end, it is necessary to put a mark on the colour brush, which must be always used for the tint, the brush on opposite end being used for water only.

A small brush, unless for small objects, should never be used for anything larger than what it was intended for, as it will not lay on the tint equally; a brush of the proper size with a good point not only does the work better, but also quicker.

A brush, if laid down moist at any time, is apt either to soil or to get soiled, to obviate which, the little tumblers (referred to in Chapter VI.), having indentations round the

rim, will be found handy for laying the brush across, besides containing the water for shading purposes. A very good brush-rest can also easily be made by cutting the edge of a little pasteboard box into notches like saw teeth.

Two kinds of palettes (Chapter VI.) are necessary, one having a sloping recess for rubbing down the Indian ink, and having three or more little cups in it for mixing up the tints; the other having three or four sloping recesses only, for rubbing down each colour separately, for using each by itself, or before mixing.

Tints should never be made by artificial light; if it is necessary to shade at night, they should be mixed up by daylight.

One colour should never be rubbed down among another, as in all likelihood it will be laid aside to dry with other colour on it. Colours should never be taken off the cake with the brush, as by repeatedly doing so hollows the cake, and renders it unfit to rub down when required; neither should they be dipped into the water for common use, for if good (as they should be) they soon crack and crumble to pieces; the proper way is, to rub them down on the palette, having put a very little water in it previously by the brush. A common card bent up half an inch at one end, upon which to place the Indian ink immediately after using, will be found useful; otherwise it is likely to soil everything with which it comes into contact.

The neutral tint for shading engineering drawings, and which generally gives satisfactory results, is composed of Indian ink, Prussian blue, and crimson lake, to which some draughtsmen add a little gamboge to give the tint a greyish hue. The tint should not be too dark, as by using light tints, and going frequently over the shadows, they can be better modified and corrected every time the process is repeated than by using dark tints.

To keep tints from evaporating over night, the little "cabinet nests" (Chapter VI.) are requisite, or (to descend

to a common article) old pomatum pots, having a lid, are very good utensils for preserving the tint.

If one or two days are required to go all over an intricate drawing once, it is best to mix up fresh neutral tint for every coat, as even the best colours change in the course of a day or two though covered up from the light in a close pot; much of the blue disappears, leaving the tint similar to a mixture of lake and Indian ink alone. Should a tint evaporate a little in the course of a night, when it is wished to use it again the next day, there will generally be seen a mark round the dish; if water is added filling up to this mark, it will restore nearly the same degree of tint.

Tints left to dry completely upon the palette should never be moistened again for use, but should be washed clean out, and fresh tints made up for the occasion; Indian ink, especially, if dried up and moistened again for neutral tint, invariably leaves brush-marks in the shading.

In using one tint in a palette having other tints in the several recesses, it will be found safer to cover up those not being used at the moment with a card.

The proportions of the colours composing the tint throughout a drawing should never be altered. Every time the tint is used, it should be stirred up with the colour-brush. If an ordinary tumbler is used for the water, it should never be more than one-third full, otherwise every time the water-brush is put into it, it would wet the holder unnecessarily.

The palette, with the shading tints, and tumbler containing the water, should lie before the operator, placed upon the drawing on a sheet of thickish paper, so as to keep the drawing clean.

Fluid colours should never be passed across a drawing, but around it.

When shading, there should always be a sheet of clean white paper placed on the drawing under the hand, close to the part to be shaded, to preserve the drawing from any perspiration, which would prevent the paper taking the tint

easily; this sheet of paper should also extend below the arm, to keep the drawing clean.

There is another method of keeping a drawing clean, which will be found in the latter part of Chapter IX.

Damping large surfaces by a large water-brush in warm weather, either for flat or round surfaces to be tinted, is quite necessary; otherwise the tint is apt to dry too quickly, and leave cloudy marks. The surface should not be too wet; clean blotting-paper being applied to take off the superfluous water, which if allowed to remain causes the dampest places to *buckle up*, and renders the tint difficult to put on equally, being apt to settle in the lower parts. It is easier, therefore, to do shading in the winter, the paper not being so dry; however, to put on a tint properly, the paper surface must be quite flat.

In shading a cylindrical object, it can be done with more facility when its position is horizontal, and with the light side next to the operator (the drawing being readily placed in any position by turning it); it being more difficult to wash from than towards you with the water-brush.

In the objects referred to, either in a vertical or horizontal position, the darkest place should be a quarter of the diameter from the edge on shade side, Fig. 297, and the lightest place about a quarter of the diameter from the opposite side; and when in position, either vertical, horizontal, or at right angles to the direction of the light, a little reflected light should be shown next the line on the shade side, as in example, Fig. 298; it should also have a little shade close to the line on the light side, in contrast to the part that should be lightest of all.



Fig. 297.

When such object is inclined in the direction of the light, Fig. 299, the shade will be the same at each side, and narrower than in position, vertical or horizontal, lightest in

the middle, and having no reflected light close to the line on either side. When such object is inclined at right angles

Fig. 298.



Fig. 299.

to the light, the shadow on the shade side should be broader than in a vertical or horizontal position.

Sections of cylinders lying at the angle of 45° should have the shadow graduated, as at *a b*, in diagram, Fig. 300, independently of the shadow of the side of the cylinder at section, and which should come over the graduated part.

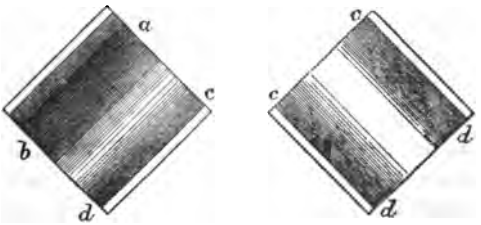

Fig. 300.

The sides of the cylinders at *c d* should have a shade close to the sectional line of cylinder, the part in the middle of the right-hand cylinder being the lightest.

The colour-brush, when about to apply the tint, ought not to have too much in it, or the tint will run in all directions when the water-brush is applied; and the water-brush must not have too much water for the same reason.

If at any time the tint should get beyond the line by accident, the best way is to push it hard within the line by the finger; in most cases it will come back and stop about the proper place; this will be found better than attempting to

wash off the excess with the water-brush, which would only tend to increase the error.

In shading, the brush should be held in as vertical a position as possible; it will be found much easier to keep any boundary line. Before every application of the water-brush to the shading it should be washed in the tumbler, and the superfluous water taken off, by either drawing it between the lips (for which reason the mouth should be rinsed out clean before shading, especially after meals, as the brush must be quite free from greasy matter), or the brush might be applied to blotting-paper.

In commencing to shade a cylindrical object—say, of two inches in diameter and six or seven inches long—begin at a quarter of the diameter from shade side, and put on the tint, about a quarter of an inch broad for the first coat, in short lengths at a time, washing off the side next the middle of cylinder first, as it is of more consequence than the edge of tint next the line. The water-brush should be drawn along as straight as the shadow is required to be, and a little in beyond the edge of the tint, taking care that the end of the tint does not get dry before the next little length is added to it.* In making the shadow with brush and tint, a part just done ought not to be gone over again until it is almost dry, otherwise it will run into clouds, though it is easier to go over it again before it is quite dry. As all shaded surfaces ought to have the same number of coats each, by the time the last part in an ordinary sized drawing is gone over, the first will generally be sufficiently dry for commencing on again. For such a length as six inches three lengths would be sufficient for the shade, though an adept at the work can take such lengths as six inches and more at a time. When this first coat is dry enough it should be gone over

* If any loose spec or hair appears during shading process it should be removed with the point of the penknife at once, for such little things suck up sufficient tint by capillary attraction as to leave a white mark when the tint dries. Brushes should always be laid aside as dry as possible to prevent the hairs rotting and coming out.

again broader, about an eighth of an inch more on each side of the last coat. It is better if this is done in two lengths, so as to hide any faults in the joinings of the first coat, taking care at every coat not to stop at a former joining of tint. The third time may reach to the line on shade side, over the reflected light, so that in other coats it will not be necessary to wash it off with the water-brush next to the line, the contrast between the darkest place and that next to the line being then sufficient; the tint may then start from the line of shade side, and when approaching nearly the centre of object a lighter tint must be used, by taking a little of the shading tint into another of the palette-cups and adding a little water to it.

Cylindrical objects, larger or less in diameter than that referred to, must have their breadths of tints in each coat in proportion. Round rods of such small diameter as one-eighth of an inch can hardly be shaded nicely with water so as to look effective; in these cases it is better to take a fine brush and light tint, beginning narrow and making it a little broader every new coat, without water.

For very large cylindrical objects, after being damped, it is better to have three or four gradations of tints and a brush belonging to each, beginning with the darkest, and the last pure water. By such a method the shading is less apt to get streaky, and it is better under such circumstances than dipping the tip of the colour-brush into the water every time such broad shade is gone along by way of graduating it more effectively.

Shadows should be darkest next the objects that project them, and graduated out to the extreme edge of the shadow, as the shading on any cylindrical object. A long narrow surface, to be graduated in the length, from dark at one end to light at the other, can be done with one dip of the brush of the proper size in the tint; the surface will get lighter going towards the light end as the tint recedes from the brush.

The shadow of one object should not cross the shadow of another adjacent to it, as will be sometimes observed in a room having two or more artificial lights.

Frequently in drawings, in many little details, sections, &c., shadows are put where they should not be.

If it is required to show a *sectional* plan *c d*, Fig. 301, through the solid bush at *a b*, no shadow of the shaft *e* should appear at *f g*, being a *section*, and not in its natural state; but if it is a plan, as at *i k*, of the lower half bush M, there ought to be a shadow of the shaft at *l n*, the half bush being complete in itself and in its natural state. A shadow should never be put on any sectional surface.



In any polished end of a shaft it gives a better effect to show the light radiated from the centre to the circumference, as at Fig. 302.



Fig. 302.

Fig. 303.



Fig. 301.

In putting in the shades of six-sided figures, such as nuts, the side 3, Fig. 303, should have two coats more than the side 2, of the same tint; 1 should not have any shading tint, the finishing colour coming over all.

If through inadvertence any part is made too dark, all the other parts must be darkened in proportion, making the part alluded to appear lighter by comparison;* sponging

* The same applies to outline drawings within certain limits.

will then lighten it all equally. A shaded drawing should never be so dark as to render details almost invisible.

Flat Surfaces, &c.—All flat surfaces in a drawing should be darker or lighter, in proportion to their distances, the farthest being the darkest. In a front elevation these distances can be known from the plan, and in a plan from the elevation. The tint must be light, and of the same proportion of parts as the drawing is shaded with. Suppose, for example, that A, Fig. 304, is a plan of a series of steps, the side view of which is shown at B; 1, 2, and 3, are equidistant from each other, but 4 is twice as deep as any one of the others.

In the plan	1	should	have	1	coat	of light tint.
,,	2	,,	,,	2	coats	of do.
,,	3	,,	,,	3	,,	do.
,,	4	,,	,,	5	,,	do.

the fourth getting one more coat than the share it would have had, had it been equidistant from the others.

Were the object placed in the opposite direction to that shown at Fig. 304, the breadth of the shadows projected from each step would also show the comparative heights independently of the flat tints. Hence it is quite impossible to do a properly shaded view of an object having many parts in combination, unless their several distances are known. The same rule holds good in elevations and other views of objects. The common way in any case is to put the tint on the furthest part first, and when it is dry, to go over it again, and take in the next nearest to the eye and so on. In going over such surfaces it is better not to begin at the



Fig. 304.

same place with every new coat of tint, as the brush is very apt to leave more tint at the place begun at, so that to begin repeatedly at the same place would make it darker than the rest of the surface. The tints should come over any dark shadows that cross the flat surfaces equally with the other parts of the same surface where there are no such shadows.

If there are two views of the same object side by side, as at *b* and *a*, Fig. 305, *c* being a section, *b* being complete, and *a* having the little square part *d* removed to show structure, the corresponding parts of *a* and *b* should be exactly of the

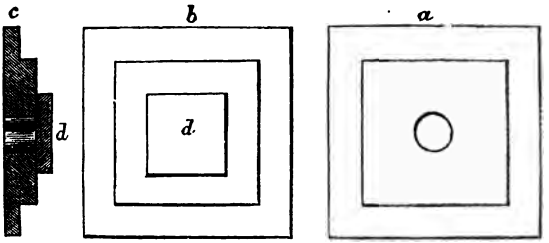

Fig. 305.

same depth of tint, as they are both supposed to be at the same distance from the eye, or in other words the same object with a part removed. The same rule applies to more intricate objects.

In putting a flat tint on a large broad surface, after being first damped, the board should be blocked up about two or three inches at one end, and the process begun with a good-sized brush at the raised end of the drawing, putting plenty of tint on and spreading it the whole breadth, keeping the front of tint as horizontal across as possible, and always taking care to stir up the tint mixture at every dip of the brush. The tint collecting in front, prevents the drying and clouding. When the surface has been gone over, and the last loose colour drawn into a corner by the colour-brush, having previously wiped any remaining colour out of it, the board should be laid down flat again to allow the tint to dry,

otherwise it would run a good deal to the lower end of the board, making the surface darker at the lower than the upper end and clouding. As every flat surface, however light it is to be, is the better for having two or more coats, raise the opposite end of the board and repeat the process, beginning at opposite end of the surface, laying the board down flat immediately after each coat.

In any intricate surface to be flattened, such as framing with several diagonals, &c., where it would be impossible to keep all the different ends of the tint moving on alternately without drying, a convenient way is to have joinings at suitable places so as to allow each part to be finished separately, joining one place to another after the first is quite dry. In making such joint it is best not to have it straight across, which is more easily observed than a joint formed like saw teeth, but in angles more acute. When gone over several times and the joints thus made at different places for the several coats, and sponged when all the shading is ready for that process, if done properly, no joining can be detected.

Flat surfaces should have a little light on the top and left-hand edges (or those opposite the light) of all projecting parts. This is effected by leaving the required space when putting on the flattening tint at every operation, though the finishing colour should come to the line.

Where there are flush or level joinings as at *a* and *b*, Fig. 306, no light should be shown, as in such form it is the same as one solid. In sections, the part sectioned should have a slight tint.*



Fig. 306.

Cylindrical objects, such as columns, &c., at various distances from the eye, should have such light washes of tint all over them in proportion to their distances as will throw out those which are nearer the eye. Throwing back round

* Sectional work is also referred to further on in this chapter.

surfaces by a light tint over them is not generally adopted in mechanical drawings, though when it is done, the effect is admitted to be better.

All surfaces ought to be tinted and set back to their proper positions in distance before sponging, and should not be touched with the tint afterwards, unless for little repairs.

The accompanying shaded Tuscan order, Plate II., is given to show the ordinary depth of the darkest tints in a finished drawing, as also the depth of the flat tints relative to their degree of projection, the projections facing the observer being the same as the profile to the right.

If a drawing is to be sponged, no finishing colours or shade lines are put on before such process, and the latter only after all the tints and colours are put on. An experienced draughtsman is not supposed to use a sponge to his shadows, though the cases are rare in which the shadows are so perfect that sponging would not still farther soften them. The shaded drawings of those who are not accustomed to the process are always improved by the use of the sponge after having received five or six coats of thin tint. A beginner has difficulty in keeping to the line with his brush, and the excesses over the line are hardly ever in the same place, and as the tint is light, the sponge takes them off and softens down the legitimate shadows.

To sponge a drawing once after six or seven coats is sufficient. The surface of the paper, after the operation, generally takes the tints more easily, as it should receive two or three coats afterwards (the flat surfaces excepted). Some drawings are softened by going over them with a flat soft brush and water, before the finishing colour is put on; this requires some skill so as not to take off too much of the shading tint.

A drawing, when ready for sponging, should be quite dry, otherwise—parts thus sponged would be made much lighter. Neither should a drawing undergo the process immediately

Plate. II. **SHADED TUSCAN ORDER.**

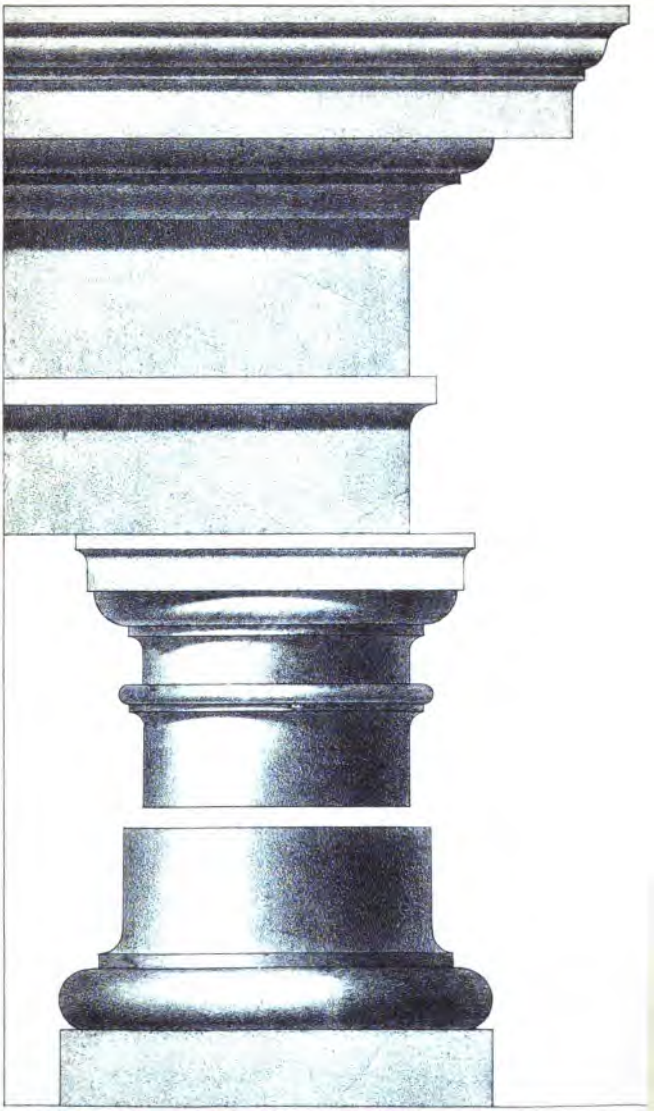

London, Lockwood & Co. 7 Stationers' Hall Court.

after being held to the fire to dry, or the first application of the sponge would, by the tint it always removes, leave a dark mark on the paper, which, drying quickly, no amount of sponging would ever take out again without injuring the surface of the paper. A drawing for the process must be dry and cold. A common tumbler is too small for the process for any sheet above eighteen inches square, a large bowl or basin, or two of either, being better, as a considerable quantity of dirty water has to be squeezed out of the sponge from the removal of tint from the drawing. Having taken the close grained 6-inch sponge and saturated it (not too fully), with water, all the *white* surface of the paper should be wetted well before going over the tinted part, so as to prevent the tint taken off by the sponge adhering to the dry white part of the sheet. The dirty water should be squeezed out, and with a fresh supply apply the sponge over all gently two or three times until scarcely any or no tint comes off, and keeping within an inch of the edge of the paper so as to preserve the gum joint. Large shadows are seldom so perfect but that they require in some places a touch of tint where they are lighter than they ought to be, and this before putting on a finishing colour over all. When the tint is put on in the way of repairing—it should be perfectly dry before being touched again, as when moist it looks always darker.

In such instances, when the paper takes a considerable time to dry—as in winter, a want of patience may prompt the draughtsman to apply a hot iron within a short distance of the drawing, a plan frequently resorted to in drawing-offices for drying a drawing quickly, when not intended to be highly finished; but neither that, nor the common practice of holding a drawing over gas-light, in the absence of a fire, is to be recommended. A better way is to heat a sheet of drawing paper at either the fire or the gas and hold it sufficiently distant from the drawing so as to dry it without injuring it, though in all cases it is best, when circumstances will permit, to let a moist drawing dry naturally. Holding

a drawing to the fire, if the paper has been properly stretched at first, is very apt to split it.

A stretched sheet of paper on a board having a drawing on it occupying a small part of the paper just damped with the shading, if held to the fire for the purpose of drying it quickly, is apt both to crease the sheet and split it.

For finishing colours or tints for malleable and cast iron, brass, copper, wood, &c., a great deal depends on the taste of the individual. In engines, and machinery, some prefer them washed all over with thin neutral tint, blue predominating in greater proportion. For malleable iron, the tint referred to is always used, but for cast iron there should be more lake in it, having more of the hue of writing ink. For any round or cylindrical object it is better to shade with the finishing tint once or twice over, it blends better with both shading and finishing tints when the drawing is finished. Green is sometimes used for cast iron, assimilating it to the paint on the machine it is intended to represent; a locomotive boiler, for instance, in a pictorial drawing is generally made the colour of the thing itself. In all such cases it should be a yellowish green, which, when put on above the neutral shading tint, having blue in it, makes the proper green. In all such cases the finishing colour must be well watered, even if necessary to go over it twice, which indeed in most cases is better, as it tends to equalize inequalities. Dirty green colour, on a ground shaded with pure Indian ink, as is sometimes the case, never looks well and ought to be avoided.

In iron work in a drawing intended to be a picture, such as the outside view of a boiler where the iron is generally painted red, the drawing should show that colour also. The finishing tint for red over all should be composed of lake, gamboge, and carmine. Blue as a finishing tint for such purposes is very well, in certain drawings only, for the representative colour of iron.

Light red, or as it is sometimes called Indian red, is used

more for mixing up with other colours such as for wood, brass, &c., than for use by itself.

Finishing Tints.—The finishing tint for *brass* is composed of gamboge, yellow ochre, and light red; for *wood*, of gamboge, yellow ochre, and a little burnt umber; for *copper*, of gamboge, yellow ochre, burnt umber, and lake (the latter predominating).

The finishing tint for *stone* seems to vary with the ideas of the individual, though a very good tint is composed of gamboge, light red, and burnt umber.

Finishing tints should never be mixed up at night, as by artificial light it is difficult to judge of them properly, especially yellows and greens. Such colours, if to be used at night, should be made ready in daylight.

Many coats of a chalky finishing tint over a shadow should be avoided, as it will lighten the shadow; and in any coloured drawing to be stretched on cloth for framing no chalky tints, such as indigo in iron plate sections, or shade lines, should be put on till after it is stretched, and if to be varnished, not until after the drawing is sized.

When wood work occurs, as it frequently does in engineering drawings, the best way for graining the side of fir or other soft wood is by using the colour for such a purpose (before referred to) and washing off the edge with water-brush as at A, Fig. 307; for oak with the drawing pen as at B.

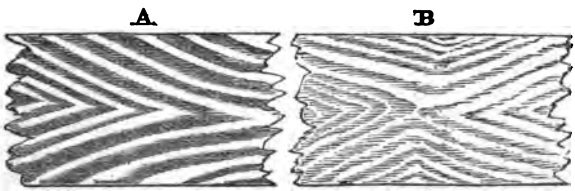

Fig. 307.

The latter requires more practice to do it effectively than the former. In a drawing that is to be sponged the graining

or any finishing colours or shade lines should never be put on previously. In end wood the ink compasses * are generally used for the circular work as shown at A, Fig. 308, with its colour (light red, called Indian red, or sienna). Another effect is produced by doing these circles by hand with the brush, and shading one side off as at B, and showing a few radiated *shakes* from the centre; in either system both the side view of wood as well as the end views should have a coat of wood colour previously to graining. To distinguish a brass section from wood, of course the different yellow colour would so far assist, but in the former case the sectional lines should be straight and diagonal.

A



B



Fig. 308.

In some pictorial drawings for framing a very slight wash of thin gum or isinglass is put on the dark places, to bring out the effect; but this is very seldom resorted to; there ought to be effect enough without it.

Sections.—In cross sections not to be crossed with diagonal lines, light tint should be put on, and it should be the lightest part of any flat surface in the drawing; the light should be left at the edge, as explained for other projecting flat surfaces, the finishing colour coming over all. If to be crossed with diagonal lines they ought never to be so with Indian ink on a coloured drawing, but with bluish tint for iron, and yellowish for brass, and after all sponging, and before any shade lines. Even in a section to be crossed with diagonal lines, it is more effective to give a light wash all over first with blue for iron, and yellow for brass, but no other tint previously, as in the other instance. Crossing with diagonal lines is always difficult for a beginner; when not equidistant they destroy the look of the drawing. The other process, under such circumstances, is the better way.

* See remarks on spring bows, Chapter XIV., Fig. 217.

For drawings having sections of iron plates, if less than to a scale of $\frac{3}{8}$-inch to a foot, the section of the plates or angle iron on a darkly shaded ground should be drawn in with indigo, or Prussian blue and flake white, after all the finishing colour is put on; Indian ink never shows well, being of a glossy nature. In drawings to a larger scale the sections of iron plates are composed of two lines for the thickness, and should be filled up with light Prussian blue.

After all the colouring of a drawing is finished, if to be shade lined (which in most cases improves a drawing, the thick line taking off any little roughness left from the shading at lines at shade side, and on which side they always come), the circles, as in outline inking (Chapter XIV.), must be put in before the lines. (For border line, margin, and printing, see Chapter XVII.)

A shaded drawing should never be rubbed with India-rubber. Stale bread a day old is the best thing to rub the white part of the paper with, the crumbs of which, if not too dry, may be gently rubbed over the shaded part if it shows the least dirty.

If it is wished to give an uncoloured drawing the appearance of a shaded engraving, by fine lines (which can only be done after much practice), the flats should have a light tint of Indian ink, the rounds shaded also as in shaded drawings, but only with one coat of the thin tint referred to; the shadows should then be ruled in by lines above the tint, with the drawing pen in the best possible condition. It will have a better effect than by simply being ruled without the tint.

In shading or colouring an outline engraving, unless it is printed on drawing paper, it must have a thin coating of size (isinglass) over it, otherwise the effect will be much the same as attempting to shade on ordinary blotting paper. The shading on paper prepared with size cannot be sponged. (For cutting off a finished drawing see Chapter XXIII.)

CHAPTER XVII.

PRINTING AND BORDER LINES.

THE plainer the printing appears on any drawing the better, and lettering such as A B C is admitted for common engineering purposes to be the best, as it is certainly of a form quickly made. The same form of lettering in outline looks well if properly done, but it is found that beginners generally manage the above better. In this work it is as well not to accustom one's self to the T-square and ink bows, as a stiffness results, which in print of the size in example given should be avoided; though for letters half an inch wide, either in outline or filled in with black or colour, the square and compasses are requisite. The style which can be done *most* quickly for drawings to be completed hastily, is somewhat similar to that first alluded to, but inclined thus *A B C* Here, should any letter not be inclined exactly at the correct angle, the difference is not so easily detected as would be with the vertical letters. Set squares, as in subjoined diagram, may be used with advantage for the formation of the letters indicated on it for vertical print, having four angles on one side, as shown; any of which may also be used for ruling for inclined print. They cost about 1*s*. each, or 2*s*. 6*d*. for a set of three. The ordinary way of using them is by placing them against the T-square.



Fig. 309.

German Text or Old English, when done nicely, is suitable.

Elaborate printing and belaboured border lines with ornamental corners, divert the attention of the observer from the drawing to the surroundings; though it is admitted, at the same time, that indifferent print, or a thick black border line

like a *mourning card*, on a good drawing, completely destroys the look of the drawing.

Where there are to be two or three lines of print under each other on a drawing, the easiest way of dividing off the lettering is to take a slip of writing-paper, draw a line at a distance from the edge equal to the size of the letters, then by hand—sketch in this space all the words that belong to one line; take the half of the length of the lettering on the slip, and put a central mark on the edge. Apply the edge of the slip with the sketched letters to the lower line for print on the drawing, having a centre line upon which to place the central mark of print on slip, and sketch in between the print lines every letter, opposite the corresponding letter on the slip, and so on with every fresh line of print. This will be found a much better way than counting the letters in a line and dividing on each side of the centre line for the number of letters; in this way there is always trouble with such letters as W's and I's not occupying the equal spaces. Even with half-inch letters it is easier to print them on the edge of a slip of paper of their proper size, and finding the half of whole length, apply the centre of slip to centre line of printing on the drawing.

Each letter is drawn in correctly with the pencil previous to inking-in. Where there is more than one line of print, the space between should not be less than between the lines containing the letters.

It is a question of taste and convenience where to place the printing on a drawing. In a coloured picture of machinery to be framed, embracing several views—if each view is to have its special name of side elevation, &c.—the print should not be heavy looking; though it is thought preferable only to state simply the sort of engine (if such) and its horse-power, under the lower border line, and between *it* and the edge of the frame line.

As a guide for printing letters of proper form, the following examples will always be found useful for reference:—

No. 1.

A B C D E F G H I J K L M N O P Q
R S T U V W X Y Z
1 2 3 4 5 6 7 8 9 0

A B C D E F G H I J K L M N O P
Q R S T U V W X Y Z
1 2 3 4 5 6 7 8 9 0

No. 2.

A B C D E F G H I J K L M N O P Q R
S T U V W X Y Z

A B C D E F G H I J K L M N
O P Q R S T U V W X Y Z

a b c d e f g h i j k l m n o p q r
s t u v w x y z

No. 3.

A B C D E F G H I J
K L M N O P Q R S
T U V W X Y Z

abcdefghijklmnopqrst
uvwxyz

No. 4.

ABCDEFGHIJKL
MNOPQRSTUVW
XYZ

abcdefghijklmnopqr
stuvwxyz

Stencilling the print on drawings with the thin copper-plate and hard brush is convenient when a drawing is required hastily; but, if not touched up afterwards, never looks equal to print carefully executed by hand.

The following is the price of stencil plates having letters similar to the examples given and correspondingly numbered 1, 2, 3, 4:—

Height of Letters	⅛ in.	¼ in.	⅜ in.	½ in.	⅝ in.	¾ in.
	s. d.	s. d.	s. d.	s. d.	s. d.	s. d.
No. 1 Alphabet, plain block.....	4 0	4 0	4 6	5 6	6 0	6 6
Do. Letters in words, per dozen	1 0	1 6	2 0	2 0	2 0	2 6
No. 2 Alphabet	4 6	4 6	5 0	6 0	6 0	7 0
Do. Letters in words, per dozen	2 0	2 0	2 0	2 0	2 0	2 6
No. 3 and 4 Alphabet, German Text or Old English.....		5 0	6 0	7 0		
Do. Letters in words, per dozen	2 6	2 6	3 0	3 0		

In regard to border lines for ordinary plain drawings, one single fine line, finished square, or rounded at the corners, and at such a distance from the edge of the paper as has been already elsewhere referred to, always looks well. Bor-

dering pens for drawing thick lines, if so required, will be found described in Chapter IV.

A drawing highly finished and coloured may have a border line composed of two fine lines one-sixteenth of an inch apart, with the upper corners rounded, either quadrant, or a parabolic curve, and the lower corners square, and these double lines filled in with gold size, or with light red, or burnt umber; either of which slightly mixed with Indian-ink has a good effect. Two or three coats should be put on thin, or the top and left-hand border lines (or those corresponding to the direction of the light for the shadows in the drawing) may be shaded with light Indian-ink, after which, going all over with the tints referred to will give the drawing that recessed appearance in which pictures are frequently mounted. When border lines, as those described, surround a drawing, the print looks better when of the same colour, and of a thickness corresponding to the border line; such print being first pencilled-in in outline and then filled in with the colour.

CHAPTER XVIII.

DELINEATION OF SCREW-PROPELLER SLIP AND PATH.

To delineate screw slip.

Having ascertained the speed of the vessel in miles per hour, or feet per minute, and the number of revolutions the

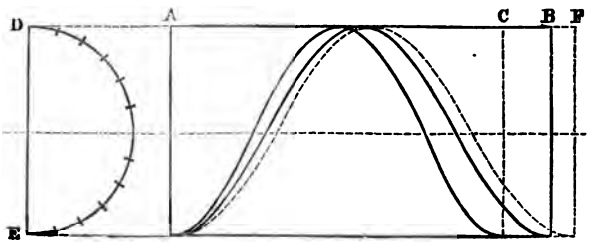

Fig. 310.

screw makes in the same time, it can then be easily deduced

how many feet the vessel passes through during one revolution of screw; which distance set off to a convenient scale, at A C, Fig. 310, making that a pitch in which to draw the actual curve made by the screw. Set off the distance A B equal to the real pitch of the screw; the difference between the screw as working in a solid A B, and compressed to the distance A C by the friction of the vessel passing through the water, is the slip, equal to C B or positive slip. Occasionally there are instances when the given speed of ship and screw show negative slip, as at A F. The difference between the actual pitch of screw and speed of vessel being B F, and as also indicated by the dotted curved line. The half diameter on D E is common to each pitch—A C, A B, and A F; the curves are drawn by the same process as that described in Chapter XIII, Fig. 204.

Figs. 311, 312, and 313, are the delineations of the paths of screws having two, three, and four blades respectively.

The pitch, diameter, and speeds shown, are the same for all the diagrams, to delineate which requires only a little cardboard mould having a curve equal to one-quarter of revolution (as *a b c*, Fig. 311). The curve is found by laying it off



Fig. 311.



Fig. 312.



Fig. 313.

correctly in the first instance, as in Chapter XIII., Fig. 204. The respective centre lines are set off in position as indicated by the vertical dotted lines.

NOTE.—In finding the curves for these diagrams (Figs. 311, 312, and 313) it is better, so as to prevent confusion, to lay each path curve down separately, and then transfer each to the one diagram, where they are intended to be, by tracing.

CHAPTER XIX.

DELINEATION OF PADDLE-WHEEL SLIP AND PATH.

To delineate the cycloidal curve, or path of a paddle-wheel; the speed of the ship and rate of revolution of the paddle-wheel being given.

Let A B, Fig. 314, be the distance travelled by the ship in one revolution of the wheel, and A O the diameter, the wheel

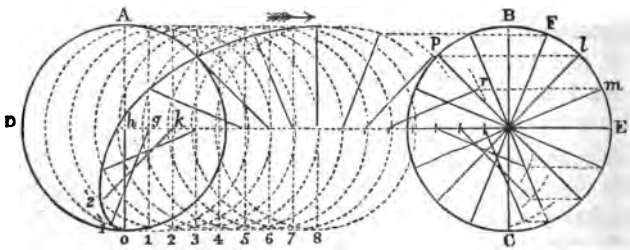

Fig. 314.

having sixteen arms or floats, which will be used in making the diagram—to render the process more easily understood. Divide A B into the same number of equal parts, in this instance, as there are arms in the wheel; and draw vertical lines, 1, 2, 3, 4, &c., through these points; on each of the points on the centre line D E, where the vertical lines intersect it, and with a radius equal to half diameter of wheel describe the dotted circles as shown. In each circle the one arm is drawn as advanced a sixteenth of a revolution upon its previous posi-

tion. Suppose the float to start from its vertical position at the lowest point o; take a sixteenth of the circumference of wheel (the distance between two floats B F), in the compasses, and on the circumference of the second circle from 1—set off to the left—the point 1′, and join *g* 1′, which will be the position of the arm when the paddle has advanced a sixteenth, or from *h* to *g*. Next, from vertical line at 2 set off the same distance twice on circumference to the left as from 2 to 2′, and join *k* 2, which will be the position of the arm when the paddle has advanced two-sixteenths (or from *h* to *k*), and so on until the half, or 8, is reached; a line passing through the points will give the curve of half a revolution of wheel, the other half of curve being similar. Another method of finding the points for the curve is shown for the half to the right. Draw the horizontal lines from the points *l m*, &c., where the several arms cut the circumference of the wheel to their respective radii *p*, *r*, &c., and the intersections are the points through which to draw the half of the curve. If a part of the curve is repeated at the lower part, as in Fig. 315, it shows the slip of the float during immersion.

In drawing the curve of a paddle having revolving floats, the process is somewhat similar. Having drawn the requisite number of circles, as in Fig. 314 (one for each float), with their centres at equal distances apart, the distance between the centres of the first and last being equal to the distance the vessel travels during one revolution of wheel; also a temporary side view of the wheel, with its floats in position, each float is transferred to its own circle at the same angle and on the same level as its representative in the side view of the wheel.



Fig. 315.

The curve is drawn in with the moulds referred to in Chapter IV.

CHAPTER XX.

TRACING.

If a drawing intended to be shaded is to be traced, the tracing should, if possible, be done first, as it is most difficult to see the lines on a shaded drawing through common tracing paper. However, shaded drawings have frequently to be traced, and for these the tracing-paper should have more than the ordinary proportion of oil in it, or engravers' tracing-paper should be used, though in such cases the oily tracing-paper is likely to make the original drawing oily, sometimes so much so as to alter its appearance. For a tracing simply to be outlined, the common way is to fasten the tracing-paper above the drawing round the edge with brass pins, the tracing-paper being large enough (especially if it is above a valuable drawing) to allow the pins to be clear of the original drawing. When a sheet of tracing-paper is not large enough to allow of this, and only an outline tracing is required, then little strips of thin paper with one edge gummed on the tracing paper, and the other end on the board beyond the edge of the drawing, may be used, and placed about 6 inches apart. As weights on the corners come very much in the way of the square, the only other common way is to pin the tracing, and when it is removed the pin holes can be easily effaced from the drawing by turning it upside down and squeezing the projecting edge of the hole with the top of a pencil or ink-bows. Referring to such trifling matters may appear to be going too much into detail, but these little matters are of daily occurrence in most drawing offices.

In tracing at any time from another tracing both should be placed above a sheet of drawing-paper, the lines will then be better observed. In all the particulars of lining the same rules should be observed in regard to drawing circles before lines, &c., as is described in Chapter XIV.

As the breath affects unstretched tracing-paper while tracing, it is the more correct way to entirely finish both circles and lines within a small area at a time, as if all the circles were put in first (as in a drawing) many of them would be out of position before the lines could be drawn.

If a tracing is to be coloured it must be stretched, or it would never lie flat after being moistened; and if it is to undergo the colouring process after outlining before being removed from the original drawing underneath it—the tracing-paper must exceed the size of the drawing all round, sufficiently so, that when cut off it is cut clear of the drawing underneath it.

In an unstretched tracing to be coloured hastily, and for which process there is not sufficient time for stretching, weights placed close to and around any part immediately after the colouring is put on greatly lessens the buckling up as it becomes dry.

If a tracing is to be mounted it is unnecessary to stretch it before colouring, and even for colouring it can be done more easily after than before it is mounted.

In the stretching process, before gumming down, the sponge cannot be used, but if a clean sheet of any sort of white paper is laid over the tracing-paper and a sponge applied to the top side of the former, enough of moisture will be found to go through the upper paper in a few seconds to stretch the tracing-paper sufficiently. Sometimes merely to breathe on a small sheet of tracing-paper will be found equally effective.

In composition of tints, and shading, and colouring, the same rules as described at Chapter XVI. are applicable.

In colouring tracing-cloth it presents a more satisfactory looking front if the outline is turned upside down and the shading and colouring put on the back; the shaded side, at the best, is never very satisfactory, but there is produced a regular appearance on the right side. Tracing-cloth, although not damped, should be gummed to the board in the same

way as tracing-paper, and the tighter it is put down previously by brass pins the less liable it will be to buckle up after being coloured upon. The tints should be put on more sparingly at a time than on drawing-paper.*

In joining sheets of tracing-paper the joint should not be more than a quarter of an inch broad, and the gum should be nearly as thin as water for this purpose. Whenever the joining is made the joined sheet should be rolled upon a roller, and with the joining in a line with the roller; a strip of drawing-paper should be placed on each side of the joint until quite dry, when the joining will be found straight and smooth. Tracing-paper, or tracing-cloth, after being drawn upon, is frequently mounted on thick calico when required for constant reference; in which case it is better to first mount the tracing on white paper and then paste the calico on the back of the thicker paper. Tracing-paper is first stretched on a board by being damped and gummed down at the edge all round; the white paper to which the tracing is to be permanently attached having a thin coating of paste is then turned over on the tracing (which should be perfectly dry) and rubbed quickly all over the back; when completely dry it is cut off as described in Chapter XXIII.

CHAPTER XXI.

DRAWINGS FOR ENGRAVINGS AND PHOTOGRAPHS.

A SHADED drawing to be engraved from should be traced, when in outline only, with a fine-pointed pencil, not too hard, and the tracing applied by the engraver to the copper or steel plate upon which the engraving is to be made. The engraver prefers the tracing, if he cannot have the drawing in outline before it is shaded. Frequently the engraver pencils the lines of shaded drawings over with a fine-pointed pencil,

* Some tracing-cloth will take the colour better if the part to be coloured has a rub with hard chalk.

preferring that to tracing it himself; and such drawing when placed on the waxed surface of the metal plate, and well rubbed on the back to transfer the pencil lines to the wax surface, invariably soils it; but if traced—all the hard outlines of shadows should be dotted only by the pencil; and to preserve the shaded drawing it should be put on a board of the exact size, with a glass to fit, and pasted with paper all round the edge to keep it in its place. This, with the tracing, is all the engraver requires. The shaded drawing, as well as the tracing, is wanted to guide the engraver in copying the shadows generally. When only an outline engraving with shade lines is required the engraver need not have the drawing at all, if the pencil tracing has a mark on the lines that are to be shade lines. A dot in red ink on each of such lines is sufficient, as such mark is also transferred to the wax surface on the plate. Another way is to give the outline of a drawing (which is to have shadows on the finished engraving), with the required shadows dotted in; an engraved dry proof on drawing-paper of the plate in outline can then be given to the draughtsman to fill in with the shadows, and covered up by glass as before stated.

A scale should always be made with the engraving or lithograph, instead of saying (either on the plate or in any accompanying letterpress) that it is drawn to any particular scale. The reason is, that though the metal plate, or the stone, or the wood may have the correct size of the drawing on it, yet the paper just before receiving the impression is damped, and consequently expands. On a length of—say 2 feet the error will be $\frac{1}{4}$ or $\frac{3}{8}$th of an inch, a difference which means 2 or 3 feet in a drawing made to $\frac{1}{8}$th of an inch to a foot, and rendering it of no use. It is seldom any two engravings from the same plate are exactly of the same size, depending entirely on the degree of moisture in the paper at the time of printing from the plate; no engraving is ever of the same size as the original drawing unless printed on dry paper, a process at once unsatisfactory.

It is sometimes the practice when a drawing has to be reduced for engraving, or other purposes, to use photography; if the drawing is not too large this may be done satisfactorily enough, but beyond a certain size—to reduce it by hand is more correct. In reduced photographs of a large drawing the parallel lines of the latter converge in the former for the reason explained in perspective. Photography is also useful for enlarging within certain limits small intricate drawings. Drawings whose lines are in representative colours,* when photographed, never produce (for optical reasons) satisfactory results; blue colour, for instance, shows indistinctly, and yellow surfaces in shaded drawings come out very dark, to the disappointment of those inexperienced in the process. A drawing made for the purpose of being reduced by the process referred to should have all its lines (if an outline drawing) and shadows (if a shaded drawing) of indian-ink only.

CHAPTER XXII.

DRAWINGS FOR LECTURES.

In large illustrative drawings for lectures, too large to make on an ordinary drawing table, the best way is to tack the paper on the wall of a room, and use a line and plummet for the vertical lines and a straight-edge with spirit level for the horizontal lines. One good base line being made, the others can be made by measuring up from it at two points in the length, or a straight-edge may be nailed along the bottom of the paper and the flat stocked square, described at Fig. 14, Chapter III., used for the vertical lines. The lines on such drawings to be visible, ought to be at least $\frac{1}{16}$ of an inch thick, for which two pencil lines should be made and the space between filled up with the ink; and if a coloured illustration, should not be inked in till after the colouring, or after

* As in office drawings for reference (Chapter XIV.).

the sizing process before varnishing, otherwise the thick black lines would be apt to run. If for only an outline, common writing ink does as well as Indian ink for the purpose. If it is to be coloured it must be taken down and laid flat on a table, and if the table is not large enough to contain all the drawing, the drawing must be unrolled in such quantity at a time as will suit the size of board or table. Should the paper *buckle up* by the moisture in colouring (not being a stretched drawing) it is of very little consequence for the use it is to be put to. When large quantities of fluid colour are necessary, it will be found convenient, rather than continually rubbing down, to melt down a shilling cake or cakes of colour largely used, such as Prussian blue, or yellow, in a wide-necked phial containing eight cubic inches of water to the cake. The phial containing this diluted colour should be kept corked up when not in use, a little being taken out by the brush when required and diluted in water according to the depth of tint required.

Besides the ordinary way of shading these drawings (referred to in chapter on Shading), it is effective, for such as are to be viewed from a distance, to shade the rounds with lines of Indian ink as in an engraving, put on after the finishing colour, and if to be varnished, after the sizing process and beforo varnishing. Another way of shading the rounds is by using a neutral tint (as for iron work) without shading off with water as in ordinary drawings, putting on the tint broader every time, the central darkest place being put on first, and diluting the tint as it gets nearer the centre o the round object. A round when shaded thus, when observed closely, appears like a figure of many sides, but at a distance this is not observable.

Large illustrations can also be effectively done in oil colour, by sizing the paper, after the lining process by pencil or fine Indian ink lines. (For large sized brushes for these purposes, and their cost, see Chapter VI.)

CHAPTER XXIII.

CUTTING OFF A DRAWING.

Before cutting off a stretched sheet care should be taken to observe that it is perfectly dry, for if cut off with parts of the surface a little damp it will never lie quite flat.

In cutting off a sheet which has been properly expanded before being gummed down at the edge, if the following rule is not observed, there is a risk of tearing out a piece from *one* corner of the sheet.

The opposite sides should never be cut first, for if so cut, upon nearly completing the cutting of the third side, the paper undergoes contraction, and the fourth side pulling against it, is apt to snap off the remaining inch or so, and generally in towards the sheet, seldom in the margin on the outside of the cutting off line. The sheet should be cut off all round, taking care, by applying the knife blade under the edge of the sheet, that it is free from the board before proceeding to cut off the side or end adjoining. When the knife is applied—it is better to cut by the line made at first for that purpose, without using the T-square or a wood straight-edge, the edges of either being apt to get cut from the process. A metallic straight-edge may, however, be used with advantage.

When the sheet is removed the strips of drawing paper which are left on the board should be simply sponged over two or three times, and they will peel off easily. It is better also to let the gum of the joint remain on the board to assist in the adhesion of the joint of the next sheet to be stretched, if of the same size as that cut off.

If, in a stretched sheet, it is found that only a portion is required for the drawing to be cut off, the remaining part of the paper being still required for another drawing, and requiring

its tension; rather than damp the remainder and fix the loose side, it is better to make a few incisions across, as at *c*, Fig. 316, before the drawing, say on side at *b* is cut off, and having gummed and pinned down these at *c*, and let them dry, proceed to cut and gum the intermediate spaces *d* which will keep the remaining portion of paper *a* as tight as before while freeing the part *b* from the board.



Fig. 316.

CHAPTER XXIV.

SUNDRY NOTES.

When a drawing is cut off it is better to keep it flat in a drawer for the purpose, or in a portfolio, than rolled up, unless for exportation. Japanned tin cases are to be had for rolled drawings, and at the following prices: 30 inch 6*s*., 42 inch 7*s*. 6*d*., 54 inch 10*s*.

A common substitute for string for a rolled drawing, and one less likely to crease the drawing, is made as follows:—Take a strip of drawing paper from 1½ to 2 inches broad and an inch longer than the circumference of the rolled drawing. About half an inch from each end, make incisions—at one end in the middle, and one-third of breadth across; at the other end at the sides, each one-third across; fold in the sides so that they may pass through the opening at the opposite end of the strip, and on being opened again after they have passed through, the whole will present a hoop, which, when slipped over the drawing, will keep it secure.

Should a fir drawing board get accidentally dented, within certain limits an application of water to the part will bring it up to its proper level.

Should a drawing get a grease spot, it can be very nearly removed (at least so far as to be hardly visible) by the application of a hot smoothing iron on clean blotting paper placed over the spot, but not sufficiently to be coloured over.

APPENDIX.

The several matters contained in the following Appendix will be found useful for reference; they are so closely connected with the subject of the book as to render some mention of them necessary.

APPENDIX.

PART I.

ARCHITECTURAL ORDERS IN ENGINEERING.

The following examples and description of the architectural orders, referred to in Chapter XIII., will be found useful, as giving the proportions of those most frequently adopted in engineering, namely, the Tuscan, Grecian, and Roman Doric orders. An example of each, Plates III., IV., and V., is given, drawn to a scale, with the proper proportions in the vertical spaces at the left hand side coinciding with the architectural scale of minutes on drawing (though an ordinary scale of feet and inches may be applied to these drawings, and the proportions will still be preserved). It may be as well to remark that the projections in front of the observer are the same as the projecting profile to the right, and the projections marked in figures are from the dotted line running through the centre of column, upwards. The shaft of a column is never cylindrical, that is, of equal diameter throughout, being always tapered to a certain extent towards the upper end. The degree of tapering is called the diminution of the shaft, and ranges between one-fourth and one-sixth of the diameter at the bottom of shaft.

Tuscan Order.—The total height of the Tuscan order, Plate III., is divided into five equal parts; four of them are given to the column and the other part to the entablature. The column is seven diameters high,* and is shorter in proportion to its diameter than any other of the orders. The capital is a semi-diameter high; the base with the lower cincture of the shaft is also half a diameter. The entablature, one-fourth

* For stone columns. In engineering, the diameter of iron columns is frequently $\frac{1}{24}$th of the height.

of the column, is one-and-three-quarters diameters high; it is divided in the same proportion as the other Roman orders, two-fifths of its height being given to the cornice, and the other three-fifths divided equally between the architrave and frieze. The projection of the cornice over the vertical faces of the inferior members is equal to its height.

Grecian Doric Order.—The following are the average proportions for the members of the order, Plate IV. Taking the diameter at the bottom of the shaft as the unit of measurement, the column is six diameters in height. The diameter at the upper end of the shaft is three-fourths of a diameter—that is, the shaft diminishes one-fourth of the diameter. The height of the capital is half a diameter. The height of the entablature is one-third of that of the column, or two diameters. The surface of the shaft is usually worked into twenty very flat flutes, meeting each other at an edge.

Roman Doric Order.—Dividing the whole height of the order, Plate V., into five equal parts, one of these is given to the entablature, the height of which is therefore one-fourth of that of the column. The column tapers one-sixth throughout the shaft, and is eight diameters high, of which one diameter is distributed equally between the capital and the base. When fluted, the flutes are separated by fillets. The entablature is two diameters in height, and divided into eight equal parts; these are distributed among the cornice, the frieze, and the architrave according to the numbers 3, 3, and 2.

PART II.

VOLUTE.

To describe a Volute: given—the number of revolutions or quarters of which the spiral is to consist, the vertical height of the spiral, and the diameter of the eye.

Let A B, Plate VI., Fig. 1, be the height of the volute, and let

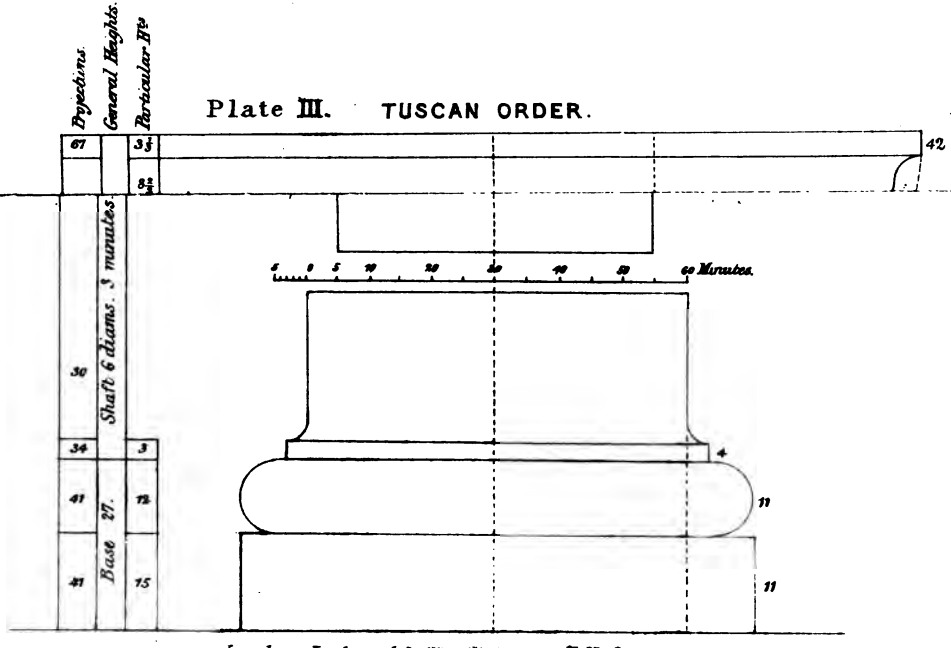

London. Lockwood & Co. 7, Stationers Hall Court.

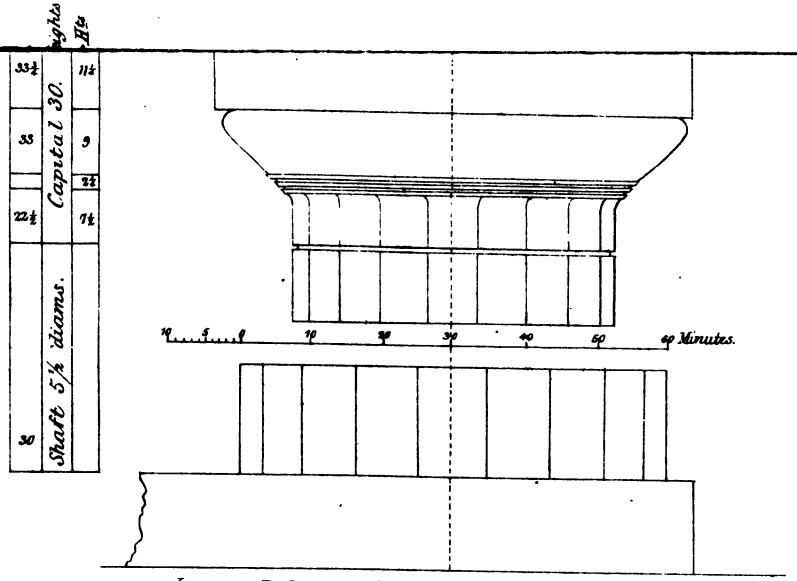

London, Lockwood & Co. 7, Stationers Hall Court

Plate V. ROMAN DORIC ORDER.

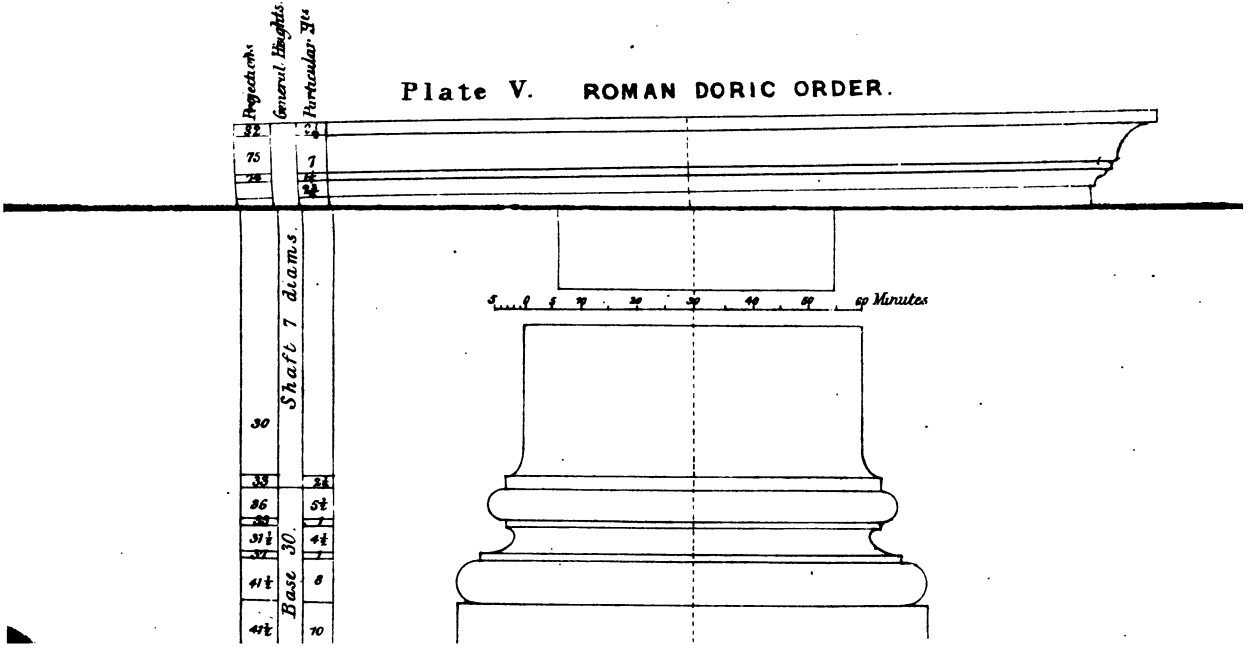

Plate VI.

Fig. 2.

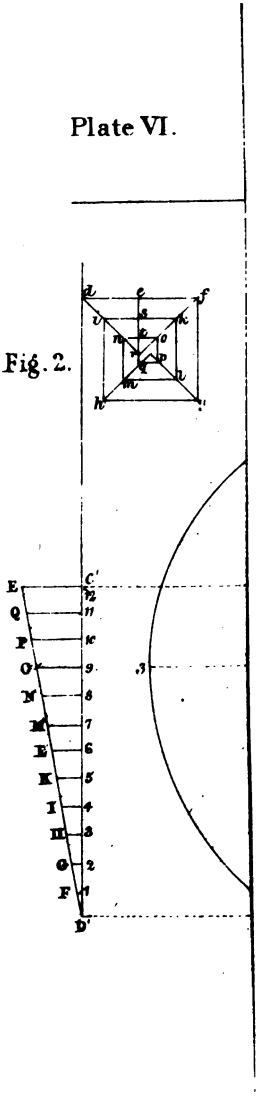

Londo

the spiral make three revolutions, consisting, therefore, of twelve quarters; bisect A B at the point C, and from A B cut off A D, equal to the given radius of the eye; divide D C into as many equal parts as there are quarter revolutions in the spiral to be drawn (which in this case are twelve in number) at the points 1, 2, 3 . . . . 11, 12. To prevent confusion, this division is indicated upon a parallel line D′ C′; draw C′ E at any angle with C′ D′, and make it equal to two of these parts; join D′ E, and from the points 1, 2, 3 . . . . draw straight lines 1 F, 2 G, 3 H . . . . parallel to C′ E; taking C *d* equal to one part, draw *d f* perpendicular to A B, and equal to 12 E; draw *f g* perpendicular to *d f*, and equal to 11 Q; draw again *g h* perpendicular to *f g*, and equal to 10 P. Proceed in this manner until all the sides are drawn; then, the points *d*, *f*, *g* . . . . *p*, *q*, *r*, so found, are the centres from which the quadrants which compose the spiral must be successively described. For this purpose, produce *d f* to 1, *f g* to 2, *g h* to 3, and so on; the quadrants, as they are described, will be limited by these lines; from the centre *d*, with the radius *d* B, describe the quadrant B 1; from the centre *f*, with the radius *f* 1, describe the quadrant 1, 2; from *g*, with the radius *g* 2, describe in like manner the quadrant 2, 3; proceed in this way till the last arc, 11, 12, is described from the centre *q*, with the radius *q* 11; then, finally, describe the circle at the centre from the point *r*, and with the radius *r* 12. If the operation be accurately performed, this radius *r* 12 will be equal to A D, as required, and the spiral will be completed.

But, as the process, as it is now described, is very liable to inaccuracy, the method of finding the centres shown on a larger scale at Fig. 2, is at once more expeditious and more certain. Having drawn *d f* perpendicular to the vertical line, bisect it at *e*; draw *e r* perpendicular to *d f*, equal to *d e* or *e f*, and join *d r* and *f r*; divide *e r* into three equal parts, *e s*, *s t*, *t r*, and draw *i s k* and *n t o* parallel to *d f*; draw *f g* perpendicular to *d f*, and equal to 11 Q; draw *g h* and *i h*

respectively parallel and perpendicular to *d f*, meeting at the point *h*; draw the diagonals *g p* and *h q* parallel to *d r* and *f r*, and draw the perpendiculars *k l*, *o p*, *r q*, *n m*. In this way all the centres are determined, namely *d*, *f*, *g*, *h*, ... *o*, *p*, *q*, *r*.

To describe a second spiral, which, with the first one, shall include the thickness of the hem, a similar process is applicable. Set off B R for the thickness of the hem at that part, and, supposing the hem to diminish in thickness equally for each half revolution, divide B R into six equal parts. As the spiral describes six half revolutions, it will diminish in thickness one-sixth of B R for each half revolution; set off, therefore, A S equal to five-sixths of B R, then R S is the heigh of the second spiral. Bisect B S at T, and set off S V equal to the radius of the eye; divide T V into twelve equal parts, and the method already described for finding the centres may be applied.

PART III.

EXPLANATION OF A SHIP DESIGN.

A SHIP'S design, commonly called a ship's *lines*, is gene rally composed of three views, as shown in subjoined diagram, Fig. 317, namely:—

The Profile, or sheer draught A.
Half Breadth Plan B.
And the Body Plan C.

These are always drawn together, and to the same scale, which is generally one-fourth or one-eighth inch to one foot;* and with the bow of the vessel invariably to the right-hand side, the half-breadth plan B always immediately below the profile, and the body plan C to the left of the profile.

As both sides of the drawing would be alike, one side, or one-half, is quite sufficient in both the half-breadth and the

* For the form of scale on ships designs, see Chapter V., Fig. 21.

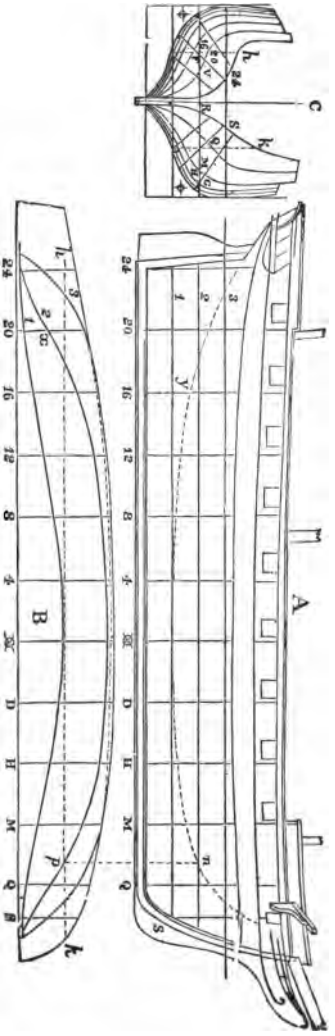

Fig. 91.

body plan; the midship section being the same on each side of the latter, one midship section is drawn, common to both sides—the right-hand space containing the bow end view, or fore-body, and the left the stern end view, or after-body, each as seen from amidships. The profile A shows the general contour of the vessel, in other words, the side elevation, together with any carving, figure-head, ports, and other openings in, and projections from, the ship's side, the stations of masts, &c. It is the part of the design which especially helps a person to realise what the ship's appearance will be when built.

The vertical lines are sectional, and are generally placed where the moulding edge of a frame or rib is to be, omitting one or more between each vertical in the drawing. The one at the broadest part of the vesel, or midship section, is distinguished by the conventional mark or sign ⊕ underneath it, and to prevent confusion in the corresponding sections (which will be presently explained) in body plan, these vertical sectional lines are usually marked alphabetically from midships to the bow with capital letters, and, when these are exhausted, by italics. The vertical lines towards the stern from midships are usually distinguished by numerals; but sometimes numerals are used throughout the length, beginning at the bow. If a part of the vessel amidships is parallel and has two or more frames or sections alike, these are commonly distinguished by repeating the same letter or numeral within parentheses. If the vertical section is where every second frame is to be in the ship, the first vertical in the drawing from midships aft would be marked 2, showing that a 1 (frame) has to be placed between midships and 2, in the construction of the ship. The same rule is observed in proceeding forward from midships; if every second frame only is indicated by the verticals, the first letter from midships would be marked B, showing that between midships and B another frame A is to be placed in the ship.

The longitudinal lines parallel to the lowest horizontal

line are called *water lines*, and named first, second, third, &c., placed two or three feet apart, the top line being the load-water line; it is frequently made stronger than the others. When the lower line, or keel, is not parallel to the load-water line, the intermediate lines, 1, 2, &c., would, in most cases, be drawn parallel to that line; if drawn parallel to the keel, they are known as "level" lines. These water lines are simply to indicate the position of the horizontal sections, plans of which are given in the half-breadth plan B, below the sheer draught A. The dotted curve line on side view (of which there are generally more than one) forward of midships is named bow-line, and aft of midships buttock-line. It represents the section of the ship made by the vertical *longitudinal plane* of which *h k* shows the position in the half breadth.

The half-breadth plan B shows the exterior plan of vessel and the plan of the water lines, which are in this view curves. The widths from the centre line to these correspond, of course, to the positions of such sections, 1, 2, 3, &c., in side view A, and body plan C. The longitudinal dotted line *h k* gives, as has been said, the position of the bow and buttock-lines, which, in the profile A, are represented by the curved dotted line, and show the form of the longitudinal section at the particular place indicated. Such lines are also a check on the other lines in proving their fairness, inasmuch as all the points in the intersection of the straight and curved lines must coincide in each view: for instance, if from the point *n* in profile A, where the curved bow line intersects the straight side view of the second water line, a vertical line be drawn to the half-breadth plan B, it should intersect the curved plan of the second water line where the straight corresponding plan of dotted bow line *h k* intersects it at *p*, and so with every other point of intersection. The transverse lines which are numbered and lettered correspond to the vertical lines in the profile.

The body plan, or end elevation, C, shows the outline at

midships, and the curved form of frames corresponding to the positions of the lines of the vertical sections on profile and half-breadth plans, lettered and numbered to correspond. The water lines are straight, and correspond to the relative lines in the profile A. The bow and buttock-lines *h k* are also straight, corresponding to the line *h k* in half-breadth plan B. The breadth of the water lines, at any of the curved intersections of the frames, corresponds with the breadth at corresponding frame or section on half-breadth plan B. For instance, the breadth B G at the frame or section H, second water line, coincides with the breadth from H to the second water line, on half-breadth plan B. In after body C, the distance B V, frame 20, second water line, corresponds to the distance 20 *x* on half-breadth plan B, and so on. The points also where the straight bow and buttock-lines in body plan C intersect the curved sections of frames, coincide with the relative intersections on profile A, where the sections at frames are straight lines, and the bow and buttock-lines are curves. For instance, the point *y*, where the buttock curve line on profile A intersects frame 16 between the first and second water lines, coincides with the point F in the body plan C, where the same buttock line intersects the frame 16. Frequently, as a further check, particularly for laying down the full size of the ship in the moulding loft, which often, for want of surface, has to be done in short lengths, diagonal lines are drawn, as shown on the body plan C, from the centre line to the side of body, which in the profile A and half-breadth plan B would be represented as curved lines, and all the other points of intersections of such additional lines and curves must agree in the three different views of the design.

The curves in profile A and half-breadth B are drawn by the baton held by weights, and the curves of the body plan C by parabolic and other moulds (page 73). The curves throughout a ship design always represent the form of vessel without the planking.

Sail draughts are generally made to a scale of $\frac{1}{8}$ or $\frac{1}{16}$ inch to the foot, and ship details to $\frac{1}{2}$ inch to the foot. Some designs contain a scale of displacement, which may be explained as follows :—

A B, in Fig. 318, represents the ship's mean draught of water on a certain scale (usually $\frac{1}{4}$ or $\frac{1}{2}$ inch = 1 foot); and C *c*, D *d*, &c., represent the several water-lines, A *a* being the load-water line. On A *a* (drawn perpendicular to A B) a length is set off, representing on a certain scale of tons per inch (say 100 tons = $\frac{1}{4}$ inch) the ship's load displacement; on C *c* a length representing her displacement at the draught B C,

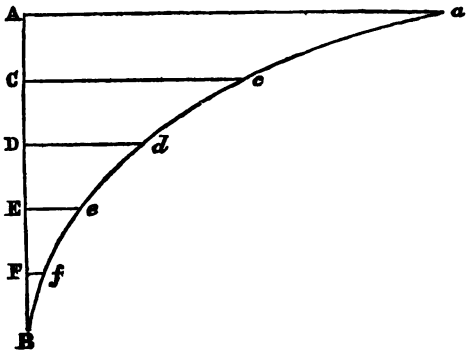

Fig. 318.

on D *d* a length representing her displacement at the draught B D, and so forth. Through the points thus obtained the curve *a c d e f* B is drawn, and from it the ship's displacement at any draught can be obtained by first measuring the draught upwards from B, and then measuring the length of the perpendicular meeting the curve. In calculating the tons weight of displacement from the cubic content, 35 cubic feet of salt water are taken as one ton avoirdupois.

NOTE.—The design shown at Fig. 317 is that of a sailing ship, and is selected in preference to the lines of a steam-

ship, though the latter more immediately concerns the engineer; but the former, having a greater proportion of breadth to length, shows the several curves more distinctly.

PART IV.

DETAIL DRAWINGS OF STEAM-VESSELS.

Detail plans and sections have their outlines taken from a design similar to that described in Part III., and are filled in with the various fittings, machinery, boilers, coals, &c. If a plan is required of any section between any of the water-lines shown in the half-breadth plan of a design, a line of section at the required height is drawn on the body plan; and on this line measurements taken from the centre line to the intersectional points of the frames, and laid off from the centre line of the half-breadth plan at each corresponding transverse section, will be the points through which to draw the required sectional curve.

If a transverse (or cross) section is required between any of the curved sections or frames which are shown on the body plan of a design, a transverse line of section is drawn at the required position on the half-breadth plan in design, on which the several breadths are measured from the centre line to the intersections of the curved water lines, and laid off on the corresponding straight water lines in body plan from its centre line; a curve line passing through the several points will be the required cross section.

In mechanical details of matters connected with shipbuilding where an engineer would describe a circle a shipbuilder would draw a parabolic curve with the mould; the latter in most cases looks more "ship-shape;" besides which, from a scientific point of view, it is allowed, to be more correct.

In making highly-finished coloured drawings of the exterior side view, deck, sections, and especially of a longitudinal section, there is scope for the exercise of much taste, as in

the representation of cabin fittings and general ornamental work; and a little more skill—akin to art, than in shading and colouring the engineering portion of such drawings.* The projections of some of the shadows are also more intricate.†

The Exterior Broadside View.—In representing the lines of plating, when they are to appear on a side view, they should be first correctly drawn on the body plan; and the measurements, taken vertically to the intersecting points on the frames, should be laid off on vertical lines indicating the positions of such frames on side view, and lines drawn through the points with the baton and weights (Chapter IV.).

For a paddle steamer it is necessary to project the shadow of the rings and floats on the side of the vessel. For the projection of the rings that described at Fig. 280, Chapter XV., is applicable. Having found the points for the shadow of one set and its arms, the simplest way is to trace it, and transfer each to its respective place corresponding to its distance from the plane, and laid off from the centre of the paddle, and at the same angle as indicated at Chapter XV. For the projection of the shadow of the floats the method described at Fig. 288, Chapter XV., is applicable. The projections of the sides of the floats on the rounded part of the vessel at bilge are straight as in the upper floats, the ends of the lower floats only being curved; the points being found as in projecting the shadow of a square flange on a horizontal cylinder. The tints for shading are similar to those for engineering drawing (Chapter XVI.).

In shading the outer and inner streaks of the iron plates a

* Additional colours to those given in Chapter VI. for engineering drawings are requisite, comprising verdigris green, vermilion, and cobalt blue. The two former cost 1*s.* each, small "half-cake" of the latter, 5*s.*

† In projecting the shadows which follow, the same rule is observed as for engineering drawings in Chapter XV. (or the process an engineer would naturally follow in making finished coloured drawings of a ship). In drawings by a shipbuilder both the shadows and shade lines are generally on the opposite side to the engineer's (or on the lower and left sides of projecting objects, the upper and right sides being opposite the light). The angle of inclination of the shadow in their drawings being the same as in engineering drawings.

little light should be left on the top edge of the former as in shaded engineering details. It costs much time and labour to leave the light in the shading process, and to preserve the general look of the shadow unbroken, doing it streak by streak. A better shade in every way is produced by going over all the plates without leaving a light, one streak at a time. If the following method is observed time and trouble will be saved. Draw a line at the top of the plate with flake-white by the drawing pen, colour over with washes of tint, five or six coats, the sponge will then take off the flake-white and leave a light line, which when coloured over with more tint after being sponged and dry will present sufficient contrast with the dark parts to give the effect required. The top sides after shading should be washed all over two or three times with the ordinary neutral tint well watered, after which a thin coating of burnt-umber. The lower part under the load-water line should have a yellowish tint, composed of yellow ochre, gamboge, and Indian red. The red colour for the paddle should be composed of gamboge, lake, and a little carmine.

The masts, if to represent wood unpainted, should be shaded first with the neutral tint, then with Indian red, and washed all over with yellow ochre and Indian red combined, then grained with Indian red not too thick.



Fig. 319.

If the water line is to be shown at the ends in such drawing, or any other coloured view, a thin wash of Prussian blue should be laid on close to the line, washing off the lower edge with water, and which, when dry, should have graduated parallel lines of verdigris green put on above it with the drawing pen, the lower being broken lines, as in adjacent diagram Fig. 319.

Longitudinal Section.—To project the shadow of the deck or the inner side in a longitudinal midship vertical section.

Let A, Fig. 320, be the longitudinal section, on which the shadow of the deck H is to be projected.

Transfer from working drawing of ship (as at Fig. 317, Part III.) a part K of body plan, having as many sections B, C, D, &c., as are contained in the length of the longitudinal part A.*

FIRSTLY.—*When the deck* H *is horizontal or without sheer.*—From the point *o* in end view K draw the relative angle of light *o r*; from the point where the line *o r* intersects the section or frame B, draw a horizontal line to the corresponding vertical section B in longitudinal view A, intersecting it at *i*, which will be a point for shadow. From the point where the line *o r* intersects the section or frame C, draw a hori-

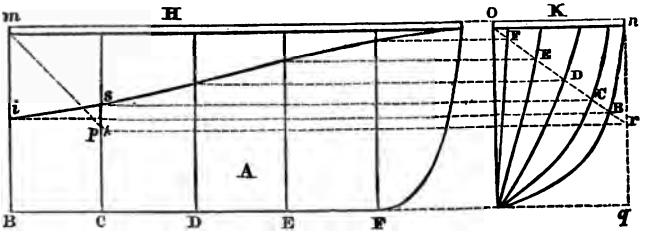

Fig. 320.

zontal line to the corresponding vertical section C in longitudinal view A, intersecting it at S, which will be a second point for the shadow. Proceed similarily for the other intersections. A curve line passing through the points thus found will be the projection of shadow required.

SECONDLY.—*When the deck has sheer.*—Let A, Fig. 321, be the longitudinal section upon which the shadow of the deck Z is to be projected (the sheer is exaggerated so as to show the process more distinctly), and B the body plan, transferred from a working drawing, and having as many sections as are contained in the longitudinal part A. Draw the relative angle of light *d e* in body plan B. In this instance a part plan of

* To which add the thickness of side, if a wooden ship, to represent the inner surface on which to project the shadow.

form of ship's side between each of the vertical sections is necessary, such form being taken on the diagonal lines between each vertical section in body plan, each such diagonal being in the direction of the light. In plan C, from the points G, H, I (corresponding to the same sections in side view A), draw the relative angle of light G, *m*, &c. From the point *e* in body plan B, where the diagonal *d e* intersects the section G, draw a vertical line *e l*, intersecting the corresponding section G in plan C at *l*; and from the point *f* in body plan B, where the diagonal *d e* intersects the section H, draw a vertical line *f k*, intersecting the corresponding section H in plan C at *k*, and join *l k*, which will be the form of ship's side between the sections G and H in plan C. From the point *n* in plan C, where the angle of light G *m* intersects the line *l k*, draw the vertical line *n o*, intersecting the angle of light *d e* in body plan B at *o*. From the point *o* draw the

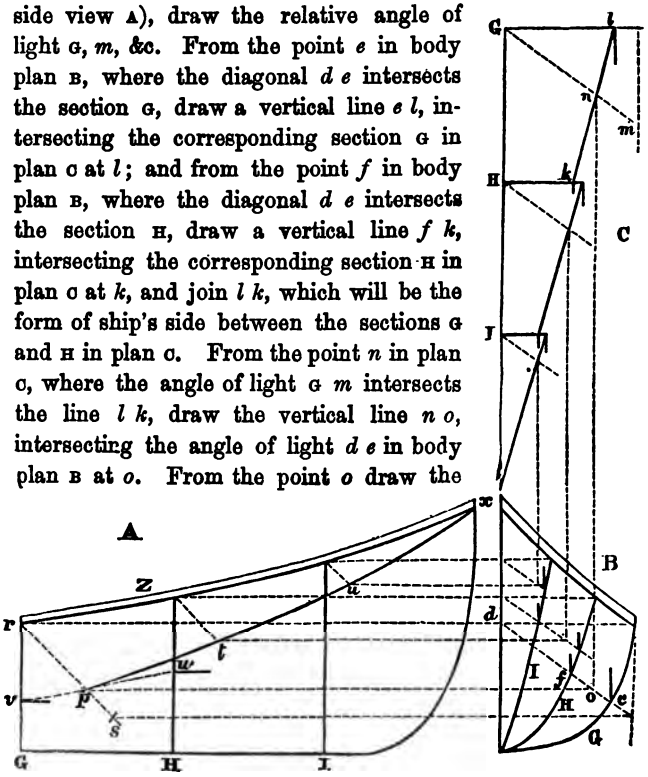

Fig. 321.

horizontal line *o p*, intersecting the ordinary diagonal line of light *r s* in side view A at *p*, which will be a point for required shadow. Repeat the same process with the remaining sections for the points *t* and *u* on the ordinary diagonals

in side view A; a curve line passing through *p*, *t*, *u*, *x*, will be the projection of shadow required.

NOTE.—If the form of the ship between each of the cross sections on the line of relative angle of light in body plan B were straight, another method of finding points for the curve would be as follows:—Draw horizontal lines from the points *e* and *f* on sections G and H in body plan B, respectively, to the points *v* and *w* on the corresponding sections G and H in side view A, and draw the line *v w*, which will intersect the diagonal *r s*; the intersection would be a point for shadow; similarly from the other sections in body plan B would be found other intersectional points for shadow on their respective diagonals.

In a drawing intended to be a picture, such as the longitudinal or other sections of a ship, where the iron is painted red, the finishing tint should be composed of lake, gamboge, and carmine. The shade lines on the under sides of projecting plates, sides of frames, and rivets, should be lake only. The rivets, when to a scale of one-eighth of an inch to a foot, should not be *inked-in* previously. It is common in making such finished sections, to colour the inside of the hull blue, because it is iron. Blue is very well for the representative colour of the iron in certain drawings only. For drawings, if to a scale of less than three-eighths of an inch to a foot, the section of iron plates or angle iron on a darkly shaded ground should be drawn in with indigo, or Prussian blue mixed with flake white, after all the finishing colour is put on; Indian ink never shows well, being of a glossy nature. In drawings to a larger scale the sections of iron plates should be composed of two lines for the thickness filled up with light Prussian blue.*

* In sectional drawings, to be in outline only, to any scale under ⅜ths of an inch to a foot, where a thickness of iron plate is shown, it is better to make it a thick black line, a little thicker than any shade lines, if any, on the drawing; when to a scale above ⅜ths the thickness should be composed of two lines. The same remarks apply to angle iron.

Upper deck plan: After all the ordinary objects are drawn on this (or other deck plans) the deck lines should be drawn in. The best way to insure correctness is to set off the breadths from the centre line upwards on margin at each end, and from the centre line downwards; the lines being drawn with Indian ink not too thick along a straight-edge held by weights at each end at the divisions. (For projecting the shadows see Chapter XV., First Series. For projection of shadow of paddle box, if a paddle steamer, see Chapter XV., Fig. 247.)

The tint for the deck should be gamboge with a little yellow ochre, well watered; for coamings of hatchways and other dark wood-work, lake and burnt umber; for light wood-work, gamboge, yellow ochre, and Indian red combined. Glass of skylights, after being darkened a little by neutral tint, should have a coat of green, composed of Prussian blue and gamboge.

In cross sections, or longitudinal sectional plans of steamers, coals have frequently to be represented, to indicate their place. These, when done in Indian ink only, have always a brown appearance, and in some drawings (otherwise good and highly finished), are so *regularly* and ineffectively shown as to destroy the appearance of the drawing. Anything touching on fine art, and apart from plain lining and shading, the engineering draughtsman is generally apt to shrink from,* but a very good way of showing coals fit for coloured engineering drawings can be made in the following way:—

Though coals in themselves are always black, at a distance they are of a bluish colour. Therefore a little Prussian blue and Indian ink will be found the best tint with which to represent them. As they are of the most irregular forms, the difficulty is generally in making them so. To get such irregularities on the space allotted for them—put the tint named in patches here and there, as at *a*, Plate VII., and when the first lot are dry, come over them again anyhow, and in all directions, repeating the process many times until every

* Unless he has already some knowledge of the subject.

Plate VII

a

a

b

c

d

London: Lockwood & Co. 7, Stationers' Hall Court.

white part of the paper in the space disappears. If then not dark enough, come over all the surface; and making darker and lighter patches here and there to represent little hills and valleys, the patches being darkest next to any part that projects a shadow, such as would be caused by the side of the ship or bulkhead, &c., as shown at *b*. The space will now be filled with little irregular figures, some lighter and some darker. The lighter bits are supposed to be more opposite the light than the darker. Then with indigo and a fine brush surround each of these little irregular bits as at *c*, making the backs of the lighter ones with a broader line of indigo, as when inclined more opposite the light; in such position more of the back of the piece will be seen. Then with a pricker scratch the fronts opposite the light of each individual piece as at *d*, but those down in a hollow more slightly. The front part of the shadow of projecting enclosure should be very irregular, and within that shadow the forms of the light and dark bits should have the indigo as in the others, but no light shown on front of them as in the parts exposed.

NOTE.—It is almost needless to add that if a drawing is to be sponged it must be done before such process as that just described, and before any thick lines or chalky colours are put on; and if to be a varnished drawing, after being sized, but before being varnished.

A border line of a rope pattern looks appropriate when surrounding any highly finished drawing connected with naval architecture. The corners for this pattern should never be square.

PART V.

PERSPECTIVE DRAWING.

IN the following example of perspective it will be seen that instead of the horizontal sides appearing parallel, when produced, they meet in a point. Perspective is simply a section,

by a plane, cutting the rays from all the visible points of the object to the eye, giving the same proportion of the different parts of the object wherever that section is placed between such object and the eye.

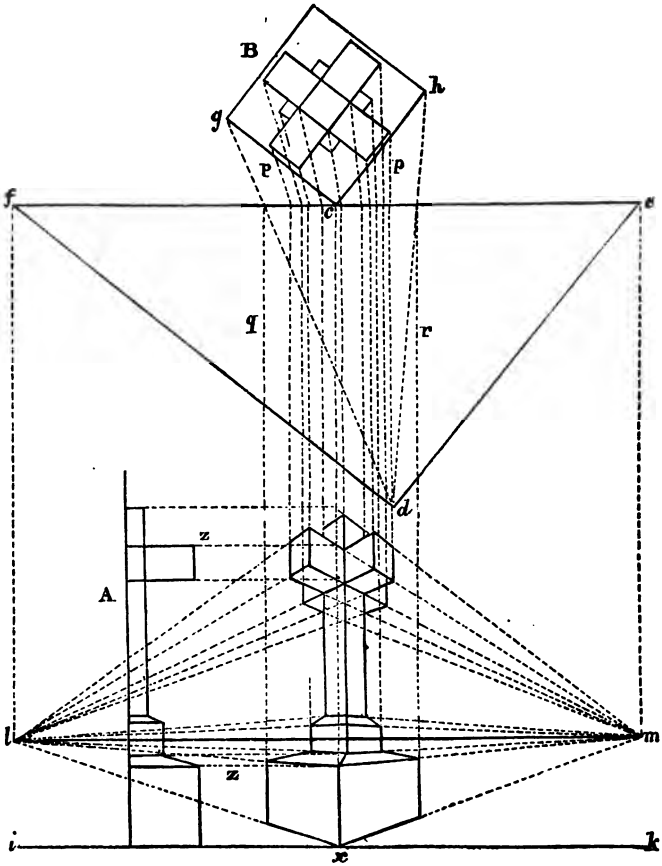

Fig. 322.

In the accompanying example, Fig. 322, A is the front elevation and B the plan of an object, drawn to their proper propor-

tions, or to a scale. The plan B being placed at such an angle to the horizontal line *f e* as is deemed suitable for the view required in perspective. The line *f e* is the plane of section of the rays from the several points to the eye of the observer at the point *d*, which point is placed in any suitable position; the lines *d e* and *d f* are drawn parallel to *c h* and *c g* respectively. The horizontal line *i k* represents the ground line on which the elevation A is erected. The line *l m* is the height of the eye from the ground, and parallel to it. From the point *f*, on the line *f e*, a vertical line is drawn intersecting the line *l m* at *l*, which is the *vanishing point* for the lines to the left side of the perspective elevation; also, a vertical line is drawn from the point *e*, on the line *f e*, intersecting the line *l m* at *m*, which is the vanishing point for the lines to the right side of perspective elevation. The lines *p*, *p*, &c., are drawn from the points in the plan B towards the point of sight *d*, it being sufficient for the purpose to terminate them at the line of section *f e*. The vertical lines, as at *q*, *r*, are drawn from the points of intersection in the plane *f e*, which give the right and left *corners* of perspective pedestal; and from the point *x*, where the central line *c x* intersects the ground line *i k*, the line *x m* is drawn to the vanishing point *m*, which gives the base line of right side of pedestal, and the line *x l* is drawn to the vanishing point *l*, which gives the base line of left side of pedestal. Vertical lines are drawn from all the points in the plane *f e*, where the rays from the points in the plan of object intersect it. The horizontal lines Z are drawn from the front elevation A to the vertical line *n o*, and from the points where they intersect it—lines are drawn to the vanishing point *m*. The perspective is completed from the points where the vertical lines intersect the vanishing lines on either side, and as explained by the dotted lines.*

* In a perspective drawing where the vanishing point is inconveniently distant, an instrument called a centrolinead will be found convenient. It is composed of three moveable bars, the price of which, 30 or 42 inches, in ebony, brass mounted, is 19*s.*; electrum mounted,

PART VI.

ISOMETRICAL DRAWING.

ISOMETRICAL projection, though somewhat similar to real perspective, differs from it in this, that whereas the angles in the former, as a rule, are drawn at 30° with the horizon, and measurements of any part, as in common drawing, can be readily taken off; in the latter, parallel lines vanishing to a point (the objects getting less to the eye as they recede), the object cannot be measured readily enough for practical purposes.

An isometrical cube may be drawn by describing a circle, and with the radius dividing the circumference by it into six equal parts, as in Fig. 323, completing the hexagon by



Fig. 323.

drawing the lines between the points thus found, and joining *a b*, *a c*, and *a d*, by straight lines to the centre *a* of the circle; the part between *c b* being the representation of the top, and that between *d c* and *d b* the two visible sides; the line *a d* being always drawn vertically from the centre of circle *a*, and thus parallel to the sides *c e* and *b f*.

Or the same results may be obtained by using the wood

25*s*., including studs to work against. A temporary instrument may be made by nailing two pieces of wood on the stock of the T-square, having first found the proper angle at which to set them, and having two nails on the margin of the board against which to bear it, taking care that the front edge of the blade of T-square is in a line with the centre of the circle which the square in its position would describe.

angle of 30° bearing on the edge of T-square set horizontally. Describe a circle, and through the centre *a*, Fig. 323, draw a vertical line *g d*, and from the point *d* where it intersects



Fig. 324.

the circle, and with wood angle of 30° on the T-square draw the line *d f*, also the line *a b* from the centre *a* of the circle, and *c g* from the point *g*, where the vertical line *d g* intersects the circle; also, by reversing the wood angle as at *d e*, and from the point *d*, *a*, and *g*, respectively—draw *d e*, *a c*, and *g b*; join *c e*, *a d*, and *b f* by the vertical lines as shown, thus completing the isometrical cube, the lines of which are obviously all of equal length.



Fig. 325.

Almost any variety of such objects, all pleasing to the eye, can be projected, as at Figs. 324 and 325, with the T-square and little wood angle, hardly any measurements being necessary.

PART VII.

SIZING, VARNISHING, AND FRAMING.

In drawings to be varnished, thick lines, such as shade lines, and chalky colours should never be put on before sizing, as they blot under the process; and before sizing the drawing should be permanently stretched on cloth on a frame, as described in Chapter IX. The best size for drawings is isinglass. The little holes, if any, made by the compasses in drawing the shade circles, should have a little size put over them to prevent the varnish penetrating and making a brown mark.

The best varnish is Canada balsam, which, as in sizing—should be put on with a flat fine brush.

In a large drawing simply to be mounted on cloth for rollers, the cloth should be tacked as tightly as possible round the edge to a board or table, the tacks being driven only half in. The back of the drawing, or paper to be drawn on, should be damped before pasting,* and then laid on the stretched linen, or "brown holland," and pressed gently with a clean cloth. The size and varnish should be put on the drawing while laid horizontal, to prevent flowing to the lowest part of it. The varnish must be quite dry before detaching the drawing from its nailed position.

To Frame a Drawing.—In framing a drawing for hanging up, dust may be kept from it by pasting narrow strips of paper all round inside at the edge of glass and frame. If to be put in a plain frame having a gilt strip, it is a preservative from tarnishing to put *it* inside the glass. When the drawing on the stretcher is placed in the frame and paper stretched all over the back (being all slightly damped previously and pasted down at the edge) the dust will be entirely excluded from the drawing.

* The paste should be quite cold before using, for if put on hot the steam is apt to raise blisters on the paper.

A shaded drawing when hung up should be in such a position that the lights in the drawing coincide with the light through the window.

The same rule applies to an outline drawing having shade lines.

INDEX.

PAGE

ABCISS 42
Acute angle 35
„ angled triangle 36
Angle, to bisect a given 53
„ curvilineal 35
„ of 30° degrees (set square) 15, 113, 260
„ of 45° „ definition of an 46
„ of 90° „ definition of an 46
„ inscribed 41
„ obtuse 35
„ rectilineal 35
„ right 35
„ of shadows 139, 165
„ summit, or vertex of an 35
Angled trapezoid, right 37
„ triangle, acute 36
„ „ right 36
„ „ definition of the base and perpendicular of a right . 36
„ „ obtuse 36
Angles 35
Arc 40
„ to bisect a circular 48
Architectural orders in engineering 85, 241
„ scale 19
Aspect of drawing office 1
Astragal, to describe the 86
Axis, major 43
„ minor 43

BARRELLED RODS, to draw 73
Base of a triangle, definition of the 35
„ in a right angled triangle, definition of the 36
Baton in drawing, application of the 73
Batons for curved lines (and cost of) 14
Beam compasses (and cost of) 10
Bevel wheels, to draw 98
„ in an oblique position, to draw 102
Bisection of a circular arc 48
„ of a given angle 53
„ „ straight line 47
Boards for drawing (and cost of) 2
„ to test correctness of 6
Body plan in a ship's design 247

PAGE
Boiler rivets, to project 108
Border lines and printing 222
Bordering pen (and cost of) 13
Bow lines in a ship's design 247
Bows (and cost of) common ink 10
" " " pencil 10
" " spring 13
Brass tint 219
Breaks, in drawings of inconveniently long objects 129
Brush rests 20, 206
Brushes (and cost of) 21
Buttock lines in ship's design 247

CABINET NESTS (and cost of) 20
Cases (tin) for rolled drawings (and cost of) 237
Cast iron tint 218
Catenary curve, definition of 59
Cavetto, to describe the 89
Centre of a circle, to find the 53
" line of cylinder for beam and side-lever engines . . . 84
" " of engine-crank at half-stroke, to find the position of . . 85
" lines 69
" " on drawing to be copied from 70
Centres, horn (and cost of) 12
Centrolinead (and cost of) 259
Chord 40
" of 60° degrees 47
Circle, to find the centre of a 53
" definition of a 39
" chord of a 40
" to pass through three given points, to describe a . . . 54
" sector of a 40
" segment of a 40
" semi- 39
" to sketch a 78
" tangent to a 41
Circles 39
" to draw ink 132
" " small and large pencil 33, 71
" shade lines on 136
" tangent 43
Circumference 39
Circumscribed polygon 43
Cloth-mounted drawing-paper (and cost of) 23
" " remarks on 31
" tracing (and cost of) 23
Coals in sectional drawings of steamers, to represent 256
Colouring, shading and 205
Colours (and cost of) 19, 251
Column, to draw the elevation of a barrelled-fluted 95
" " " parallel " 94
" " " tapered " 95
Columns, proportion of shafts of 241, 242
" to measure between 78
Commencing a drawing 31
Compasses, common (and cost of) 10
" beam and telescopic (and cost of) 10

PAGE
Compasses or bows, ink and pencil (and cost of) 10
" proportional (and cost of) 12
Concave surface, definition of 35
Concentric lines 42
" " to draw 132
Cone 45
" to find the envelope of a given 64
" " " frustrum of a 65
" section, to project an ellipse, from a 63
" " " hyperbola, from a 63
" " " parabola, from a 61
Cones, frustrums of 65, 98
" sections of 60
Conge, or scape, to describe the 90
Conical objects, intersection of cylindrical and 112, 118
" " rectangular and 117
" " spherical and 120
Convex surface, definition of 35
Copper tint 219
Copy, drawing from a 68
Copying from a tracing 69
Covering of solids 64
Crank at half stroke, to find the centre line of 85
" side view, to describe the curve in 108
Cube, isometrical 260
Curve, catenary 59
" of paddle-wheel, cycloidal 228
" moulds for ship drawing, &c. (and cost of) 16
Curved surface, definition of 35
Curvilineal angle 35
Cutting off a stretched drawing 236
" a part of a stretched sheet 237
Cycloid 58
Cycloidal curve of a paddle-wheel, to draw the 228
Cylinder casing in an oblique position, to draw a 106
" illustration of a 45
" " an inclined 45
" in beam and side-lever engines, to find the centre of . . 85
" sections, description of 59
" to project the ellipse of oblique section of a 60
" to find the envelope for an angular ended 65
" in an oblique position, to draw the plan and end views of a . 104
Cylinders, shading sections of 209
Cylindrical objects, shading of ordinary sized 208
" " large " 211
" remarks on shade lines on 136
" of equal diameter, intersection of 115
" unequal " " 116
" and conical " 112, 118
" " spherical " 120
Cyma-recta, to describe the Greek 92
" " or ogee, to describe the Roman 91
" reversa or talon 92

DECAGON 39
Definition of drawing 31
Deflected surface 35

PAGE
Degrees, definition of 45
" angle of 30° (set squares) 15, 113
" definition of an angle of 45° 46
" definition of " 60° 46
" chord of 60° 47
Delineation of screw-propeller slip and path 226
" paddle-wheel " 228
Denomination of triangles 36
Dent in a fir drawing-board, to remove a 237
Diagonal 39
Diameter 39
Dionome (and cost of) 19
Displacement, scale of 249
Dividers (spring) and bows (and cost of) 13
Division of a straight line into any number of equal parts . . . 51
Dodecahedron 43
Dome, to find the envelope of a 67
Dotted lines in drawings, remarks on 83, 134
Double drawing pen (and cost of) 13
Drawing boards (and cost of) 2
" from a copy 68
" " large machinery 75
" " models 75
" office and furnishings 1
" paper, to join 27
" " sizes of (and cost of). 22
" " on cloth, remarks on 31
" " to stretch long 26
" " " ordinary sized 24
" pins (and cost of) 12
" on a stretching frame 29
Drawings on both sides of one board 28
" by photography, reducing or enlarging 233
" by scales, &c. " 74
" for engravings 232
" for lectures 234
Duodecagon 39
" to describe a 56

Eccentric lines 42
Elevations, drawing of 71
Ellipse 43
" from a cylinder section, to project an 60
" " cone " " 63
" mechanically, methods of describing an 57
" substitute for an 57
Elongated sphere 45
" projection of shadow of an 200
End wood, drawing of 134, 220
Engraving effect to drawings 221
" photographs from drawings, &c., for 233
Engravings, drawings for 232
" shading outline 221
Enlarging or reducing a drawing from a copy 74
" " " by scales 74
" by photography 233
Enneagon 39

PAGE
Envelope of a cone, to find the 64
" frustrum of a cone, to find the 65
" an angular ended cylinder, to find the 65
" dome, to find the 67
Envelopes or covering of solids 64
Epycycloid 59
Equal parts, to divide a straight line into any number of . . . 51
Equilateral triangle, definition of 36
" " to construct an 52

FILLET 86
Finishing tints 219
Flat surfaces—tinting 213
Fluted column, to draw the elevation of a barrelled 95
" " " parallel 94
" " " tapered 95
Fractures, in drawings of inconveniently long objects . . . 129, 130
Frame a drawing, to 262
Frustrum of a cone, to find the envelope of a 65
Frustrums of cones 65, 98

GAS FITTINGS FOR DRAWING OFFICE 2
Geometry, hints on 33
" definition of 33
" lines 34
" angles 35
" triangles 35
" quadrilaterals 36
" polygons, definition of 38
" circles 39
" regular solids 43
" to bisect (or divide into two equal parts) a given straight line, by a line drawn perpendicular to it . . . 47
" to bisect a circular arc 48
" to draw a perpendicular to a given straight line, from a given point in the line; *First*, when the point is near the middle of the line 48
" *Second*, when the point is at or near one extremity of the line 48
" to draw a perpendicular to a given line from a given point without the line; *First*, when the point is conveniently near the middle of the line 49
" *Second*, when the point is near the end of the line . . 50
" to describe a square on a given straight line . . . 50
" to draw a line parallel to a given line 50
" *First*, to draw the parallel at a given distance . . . 50
" *Second*, to draw the parallel through a given point . . 50
" to divide a straight line into any number of equal parts . 51
" to construct an equilateral triangle 52
" to construct a triangle having its three sides of given lengths 52
" to draw a straight line so as to form any required angle with another straight line 52
" to bisect a given angle 53
" to find the centre of a circle 53
" to describe a circle that shall pass through three given points 54
" to draw a circle which shall touch a given line, and also a given circle 54

PAGE

Geometry, to draw radial lines upon the circumference of a circle, the centre being inaccessible 55
" to describe a regular pentagon 55
" to describe a hexagon 55
" to describe a regular octagon in a given square, &c. . . 56
" to describe a duodecagon 56
" to describe an ellipse mechanically 57
" substitute for an ellipse 57
" ovals 58
" cycloid 58
" epycycloid 59
" catenary curve 59
" cylinder sections 59, 60
" conic sections 60
" to describe a parabola 61
" " hyperbola 63
" " ellipse 63
" covering of solids 64
" to find the envelope of a cone 64
" " frustrum of a cone . . . 65
" " angular ended cylinder . . . 66
" " of a dome 67
German text print 224
Glue as an adhesive 24
Graining of wood 130, 219
Grease marks from a drawing, to remove 238
Grecian Doric order, description and example of 242
Greek cyma-recta, to describe the 92
" ovolo, to describe the 87
Gum, as an adhesive 25

HALF-BREADTH PLAN, SHIP'S 247
Hang up a drawing, to 263
Helix, or screw 42
" to describe a 122
Heptagon 39
Hexagon 38
" to describe a 55
Hexagonal prism 44
" pyramid 44
" objects and spheres, intersection of 121
Hexahedron 43
Hints on geometry 33
Horizontal line 34
Horn centres for drawing circles (and cost of) 12
Hyperbola, definition of a 60
" from the section of a cone, to project a 63
Hyperbolical ovolo, to describe the 89
Hypotenuse 36

ICOSAHEDRON 43
Illustrations for lectures 234
Inclined cylinder 45
" pyramid 45
India ink (and cost of) 20
" rubber 16
Indigo 19

PAGE
Ink bows (and cost of) 10
„ India (and cost of) 20
„ lines, to draw 133
Inks (and cost of) 20
Inking-in a circle 132
„ a drawing 130
„ a tracing 230
Inscribed angle 41
„ line 41
„ triangle 41
Instruments, drawing (and cost of) 9
Intersections 114
„ cone and sphere 121
„ cylindrical and conical objects 112, 118
„ „ objects of equal diameters 115
„ „ „ unequal diameters 115
„ „ „ and spheres 120
„ hexagonal „ „ 121
„ rectangular and conical objects 116
„ „ objects 121
„ „ „ and spheres 119, 120
Ionic volute, to describe 242
Iron-plate sections 133, 221, 255
Irregular figures, copying 72
„ objects, measuring 80
„ polygon, definition of an 38
Isometrical projection 260
Isosceles, trapezoid 38
„ triangle 36

JOIN DRAWING-PAPER, to 27
„ tracing „ 232

LARGE MACHINERY, drawing from 75
Lead weights for batons (and cost of) 14
„ „ for general use (and cost of) 15
Lectures, drawings for 234
Light for drawing office 1
„ reflected 208
„ on edge of flat surfaces in shading 215
Line, definition of a 34
„ for cylinders of beam and side-lever engines, centre . . . 85
„ engine-crank at half-stroke, centre 85
„ to draw a pencil 32
„ „ an ink 133
„ „ a curve 73
„ into any number of equal parts, to divide a straight . . . 51
„ horizontal 34
„ inscribed 41
„ mixed 34
„ oblique 35
„ perpendicular 35
„ vertical 34
Lines 34
„ centre 69
„ concentric 42
„ not continuous, drawing 73

PAGE
Lines in drawings, dotted 83, 134
" eccentric 42
" parallel 34
" to draw parallel 50
" from a centre, to draw radial 100
" on the circumference of a circle without a centre, to draw radial . 55
" shade 136
" ship's water- 247
Long drawing-paper, to stretch 26
Longitudinal sections 81

MAJOR AXIS 43
Malleable iron tint 218
Margin for drawings, breadth of 68
Mark dimensions, &c., in sketch-book, to 76
Measure between columns, &c., to 78
Measurements from a copy 69
" " large machinery 77
" " models 75
" requisites for taking 76
Measuring of irregular objects 80
" wheels 76
Minor axis 43
Mitre wheels, to draw 98
" " in an oblique position, to draw 102
Mixed line 34
Models, drawing from 75
Mouldings 86
Moulds for curves (and cost of) 16

NEGATIVE and positive screw-propeller slip, to delineate 226
Nests, cabinet (and cost of) 20
Neutral tint for shading 206
Ninety degrees, definition of an angle of 46
Nonagon 39
Nuts, to draw six-sided 55, 113, 114
" to measure " 81
" radius for the curves of " 114
" shade lines on " 138
" shading of " 212

OBLIQUE LINE, definition of an 35
" position, to draw bevel-wheels in an 102
" " " cylinder in an 104
" " " valve casing in an 106
" " " plummer block 107
Obtuse angle 35
" angled triangle 36
Octagon, illustration of an 39
" in a given square, to describe a regular 56
Octahedron 43
Office for drawing, and furnishings 1
Ogee, to describe the 91
Old English print 225
Order, description and example of the Grecian Doric 242
" " " " Roman Doric 242
" " " " Tuscan 241

PAGE
Order, example of shaded Tuscan 216
Orders of architecture in engineering 241
Ordinate 42
Ovals, methods of describing 58
Ovolo, to describe the Greek 87
" " hyperbolical 89
" " Roman 86
Ox-gall for inking (and cost of) 131

PADDLE-WHEEL, to delineate the cycloid curve of a 228
Palettes (and cost of) 20
Paper, drawing (and cost of) 22
" to join drawing 27
" to stretch long drawing 26
" " ordinary " 24
" " tracing 232
" tracing (and cost of) 23
" to make tracing 23
Parabola 60
" from a conic section, projection of a 61
Parallel lines 34
" to a given line, to draw a line 50
" rulers (and cost of) 11
Parallelogram 37
Path, delineation of a screw-propeller 227
" " paddle-wheel 228
Pen, ordinary drawing (and cost of) 11
" bordering drawing (and cost of) 13
" double drawing (and cost of) 12
" wheel (and cost of) 12
Pencil bows (and cost of) 10
" circles, to draw 33, 71
" point 32
Pencils 16
Pentagon 38
" to describe a 55
Perpendicular line, definition of a 35
" in a right-angled triangle, definition of the . . . 36
" to a given straight line, to draw a 48
Perspective drawing 257
Photography, enlarging or reducing drawings by 233
Pins, drawing (and cost of) 12
Plan, position of a machine 69
" ship's body 247
Plate, sections of iron 133, 221
Plates for print, stencil (and cost of) 225
Plummer blocks, &c., in an oblique position, to draw plans and end views of 107
Point, definition of a 34
" to draw a parallel through a given 50
Polygon, definition of a 38
" circumscribed 43
" irregular 38
" regular 38
Polygons, illustration of regular 38
Positive and negative (screw propeller) slip, to delineate . . . 226
Preparation for drawing on boards 23
" " stretchers 29

PAGE
Pricking, copying a drawing by 72
Print, various examples of 224
„ set squares for (and cost of) 222
Printing and border line 222
„ on drawings 223
Prism, hexagonal 44
„ quadrangular 43
„ triangular 43
„ truncated 44
Profile, ship's 244
Projection of an ellipse from a conic section 63
„ „ „ cylinder section 60
„ isometrical 260
„ of a parabola from a conic section 61
„ of shadows (see Shadow projections) 138
Propeller path, to delineate screw 227
„ to draw sections of a screw 128
„ slip, to delineate screw 226
Propellers, illustration of front and side views of various screw . . 129
Proportion of shafts of columns 241, 242
Proportional compasses (and cost of) 12
Proportions of spur-wheel teeth, table of 97
Protractor, application of 46
Protractors, cost of 12
Pyramid, hexagonal 44
„ inclined 45
„ quadrangular 44
„ triangular 44

QUADRANGULAR PRISM 43
„ pyramid 44
Quadrant, definition of a 46
Quadrilateral figure, definition of a 36
Quadrilaterals, illustration of 37

RADIAL LINES FROM A CENTRE, to draw 100
„ „ on the circumference of a circle without a centre, to draw 55
Radiated shadows 139
Radius 40
Rectangle 37
Rectangular and conical objects, intersection of 116
„ objects and spheres „ 119, 120
„ „ intersection of unequal 121
Rectilineal angle, definition of 35
Reducing a drawing from a copy 74
„ and enlarging drawings by photography 233
„ „ „ scales 74
Reflected light 208
Regular curves, to draw 73
„ polygon, definition of 38
„ polygons, illustrations of 38
„ solids 43
Requisites for drawing office 1
Rhomboid 37
Rhombus 37
Right angle, definition of a 35
„ angled trapezoid 37

PAGE
Right angled triangle 36
" " " definition of the base and perpendicular of a . 36
Ring sections, circular 161
Rivets on a curved surface, to draw 112
Roman cyma-recta, or ogee, to describe 91
" Doric order, description and illustration of 242
" ovolo, to describe the 86
Rubber, India 16
Ruled sketching-paper (and cost of) 76
Rulers, parallel (and cost of) 11

SCALE OF DISPLACEMENT 249
" architectural 19
" drawing by 74
" for a drawing, to make a 84
" shipbuilders' 18
Scalene triangle 36
Scales (and cost of) 17
" enlarging or reducing drawings by 74
Scape, or conge, to describe the 90
Scotia, to describe the 93
Screw propeller, to draw sections of a 128
" " path, to delineate 227
" " slip, to delineate positive and negative . . . 226
" thread, to draw a 122
" threads to the inch and diameter, table of 125
" or worm wheel, to draw a 125
" propellers of 2, 3, and 4 blades, front and side views of . . 129
Secant 41
Second-hand drawing instruments 10
Section, definition of a 59
" of a cone, to project an ellipse, from the 63
" " " hyperbola, from the 63
" " " parabola, from the 61
" of a cylinder " ellipse, from the 60
Sectionised work, colouring on 220
Sectionising any material 82
Sections of cones 60
" cylinders 59
" iron plate 133, 221
" longitudinal 81
" rings 161
" screw propellers, to draw 128
" transverse 81
Sector 40
Segment 40
Semicircle 39
Set squares (ordinary) (and cost of) 15
" for print (and cost of) 222
Shade on bright metal work 212
" circles 137
" on flat surfaces 213
" lines 136
Shaded Tuscan order 216
" tracings 231
Shading and colouring 205
" ordinary cylindrical objects 208

PAGE
Shading large cylindrical objects 211
" " flat surfaces 214
" outline engravings 221
" process 210
" six-sided nuts 212
" tint 206
" tumblers for (and cost of) 20
Shadow angle 139
" projections 138
" bracket on a concave surface 178
" " convex " 178
" " plane at right angles to it 156
" circular flange on a conical stuffing-box (vertical) . . . 177
" " " (inclined) . . . 177
" " horizontal cylinder at right angles to it . 171
" " an inclined " " " . 175
" " " plane at right angles to it . . 174
" " a vertical " " . . 159
" " " cylinder " . . 170
" " flanges on various forms at right angles to them . . 173
" " object, or disc, on a sphere 198
" " orifice on a plane parallel to it 155
" " recess " at right angles to it 145
" column (in its section—a cross) on a plane at right angles to it 142
" concave cover, in a vertical cylinder section 188
" convex " " " 188
" cylinder on a plane parallel to its axis 154, 180
" " " at right angles to its axis 141
" " sections . . . . . 187—189
" " (horizontal) on another adjacent and vertical . 182, 183
" " (vertical) on another adjacent and parallel to it . . 184
" deck (level) in a longitudinal section of a ship . . . 252
" " (with sheer) " " " . . . 253
" disc (vertical) on a horizontal cylinder parallel to it . . . 185
" " (vertical) on a sphere 198
" elongated sphere on a plane parallel to its axis 200
" flanges of various forms on planes, &c. 172, 173
" flat cover in a vertical cylinder section 188
" " covers in oblique " sections 189
" fluted column on a plane at right angles to it 142
" half cylinder " " to its ends 153
" hollow semi-sphere 164
" horizontal straight object on an inclined plane 191
" knee, round (circular in section), on a plane 204
" " square (square in section) " 150
" obelisk on a plane at right angles to it 144
" oblique flange on a plane at right angles to it 158
" " plane in a cylinder 190
" " square column on a plane 146
" " " at an angle of 45° in a recess . . 147
" " " at a greater angle than 45° in a recess . 148
" " " on two parallel planes 149
" octagon on a plane at right angles to it 142
" " round, and square flanges on various forms . . 172, 173
" ogee on a plane at right angles to it 157
" paddle float, on a float adjoining (both oblique) . . . 195
" " floats, on a plane at right angles to them . . . 192
" " ring, on a horizontal float 193

PAGE
Shadow, paddle ring on an oblique float 194
„ radial objects on a plane 151
„ radiated shadows 139
„ rectangular object on a plane at right angles to it . . . 141
„ „ „ sphere 197
„ ring (circular in section) on a plane parallel to it . . . 160
„ „ „ „ at right angles to it . . 203
„ „ half (circular in section) „ „ . . 204
„ „ (rectangular in section) on a plane parallel to it . . 160
„ round shaft on a plane parallel to its axis 166
„ screw thread 186
„ semi-circular objects on a plane at right angles to them . . 153
„ sphere on a plane 163
„ square column on a plane at right angles to it 143
„ „ in a recess being a plane at right angles to it . 146
„ „ adjoining a recess being a plane at right angles to it 146
„ „ columns oblique to a plane . . . . . 146—149
„ „ flange on an oblique plane at right angles to it . . 174
„ „ „ on a vertical cylinder 172
„ „ „ on a plane, parallel, and at right angles to it 157, 158
„ „ recesses 145
„ „ tapered column on a plane at right angles to it . . 143
„ vertical disc on a horizontal cylinder parallel to it . . . 185
Shadows on sections, remarks on 212
Shafts of columns, proportion of 241, 242
Sheer draught, ship's 244
Sheet, cutting off a stretched 236
Ship curve moulds (and cost of) 16
Ship's body plan 247
„ design, explanation of the drawing of a 244
„ detail coloured drawings 250
„ half-breadth plan 247
„ sheer draught 246
„ sections, projection of shadows on 253
Shipbuilders' scale 18
Six sided nuts, to draw 55, 113
„ to measure 81
„ radius for curves of 114
„ shade lines on 138
„ shading 212
Sizes of drawing paper (and cost of) 22
„ in sketch-book, to mark 76
Sizing drawings for varnishing 262
Sketch-book 76
„ machinery details, to 77
„ a circle, to 78
Slip of screw propeller, to delineate 226
Solid, definition of a 34
Solids, covering of 64
„ regular 43
Sphere 45
„ elongated 45
„ intersection of a cylindrical object and a 120
„ „ hexagonal „ „ 121
„ „ cone and a 121
Spheres „ of rectangular objects and 119, 120
Spheroid 45
Spiral 42

PAGE
Spiral staircase, to draw a 125
Sponge a shaded drawing, to 216
" an outline drawing, to 135
" a sheet for stretching on a board, to 24
Sponges 16
Spring dividers and bows (and cost of) 13
Spur-wheel, to draw in the teeth in face view of a 97
" " " side " 96
" " " plan " 96
" teeth, table of proportions of 97
Square, definition of 37
" definition of the diagonal of a 46
" on a given straight line, to describe a 50
" threaded screw, to draw a 122, 124
" to hold a T 32
Squares, set (and cost of) 15
" " for print (and cost of) 222
" T (and cost of) 6
" to test correctness of T 9
Staircase, to draw a spiral 125
Stencil-plates for print (and cost of) 225
Stone tint 219
Straight-edge, to test correctness of a 15
" edges (and cost of) 15
" line, to bisect a given 47
Stretch paper on a board for drawing, to 24
" " frame " 30
" long drawing-paper, to 26
" tracing-paper, to 231
Stretched drawing, to cut off a whole 236
" sheet, to cut off a part of a 237
Summit of an angle 35
Surface, definition of 34
" " concave 35
" " convex 35
" " a curved 35
Surfaces 35

TABLE FOR DRAWING 1
" of proportions of wheel teeth 97
" threads to the inch and diameters for screws 125
Talon 92
Tangent 41
" to a circle, definition of 41
" circles 43
Teeth of wheels, to draw the face view of 97
" " " side " 96, 97
Telescopic compasses (and cost of) 10
Testing correctness of drawing-boards 6
" " straight edges 15
" " T-squares 9
Tetrahedron 43
Text print, German 224
Thirty degrees set square, angle of 15, 113
Thread, to draw a screw 122
Threads to the inch and diameter for screws, table of 125
Tin cases for rolled drawings (cost of) 237

PAGE
Tint for brass 219
" cast iron 218
" copper 219
" malleable iron 218
" shading, neutral 206
" water level sections 252
" wood 219
" stone 219
Torus, to describe the 86
Tracing 230
" cloth (and cost of) 23
" copying from a 69
" to ink-in a 230
" to mount a 232
" to shade a 231
" paper (and cost of) 23
" " to join 232
" " to make 23
" " to stretch 231
Transverse sections 81
Trapezium 37
Trapezoid 37
" isosceles 38
" right angled 37
Trestles (and cost of) 1
Triangle, acute angled 36
" definition of the base of a 35
" equilateral 36
" to construct an equilateral 52
" inscribed 41
" isosceles 36
" obtuse angled 36
" right angled 36
" definition of the base and perpendicular of a right angled . 36
" scalene 36
Triangles 35
" denomination of 35
Triangular prism 43
" pyramid 44
Truncated prism 44
T-squares, to test correctness of 9
" various (and cost of) 7
Tumbler for shading, water (and cost of) 20
Tuscan order, description of the 241
" outline, illustration of 242
" shaded, illustration of 216

UNDECAGON 39

VARNISH A DRAWING, to 262
Vertex of an angle 35
Vertical line 34
Volute, to describe a 242

WATER LINES, ship's 247
" surface section, tint for 252
Weights (lead) for batons (and cost of) 14

PAGE
Weights (lead) for general use in drawing (and cost of) 15
Wheel pen (and cost of) 13
" to draw a worm or screw 126
Wheels, to draw bevel 98
" in an oblique position, to draw bevel 103
" mitre 98
" to draw spur 96, 97
" to measure 78
" table of proportions of teeth of 97
Wood, graining end 134, 220
" " side 130, 219
" tint 219
Worm wheel, to draw a 126

YELLOW TINT FOR BRASS 219
wood, &c. 219

THE END.

PRINTED BY J. S. VIRTUE AND CO., LIMITED, CITY ROAD, LONDON.

WEALE'S SERIES

OF

SCIENTIFIC AND TECHNICAL WORKS.

"It is not too much to say that no books have ever proved more popular with or more useful to young engineers and others than the excellent treatises comprised in WEALE'S SERIES."—**Engineer.**

A New Classified List.

	PAGE		PAGE
CIVIL ENGINEERING AND SURVEYING	2	ARCHITECTURE AND BUILDING . .	6
MINING AND METALLURGY	3	INDUSTRIAL AND USEFUL ARTS. .	9
MECHANICAL ENGINEERING	4	AGRICULTURE, GARDENING, ETC. .	10
NAVIGATION, SHIPBUILDING, ETC. .	5	MATHEMATICS, ARITHMETIC, ETC. .	12

BOOKS OF REFERENCE AND MISCELLANEOUS VOLUMES . . 14

CROSBY LOCKWOOD AND SON,

7, STATIONERS' HALL COURT, LONDON, E.C.

1901.

CIVIL ENGINEERING & SURVEYING.

Civil Engineering.
By HENRY LAW, M.Inst.C.E. Including a Treatise on HYDRAULIC ENGINEERING by G. R. BURNELL, M.I.C.E. Seventh Edition, revised, with LARGE ADDITIONS by D. K. CLARK, M.I.C.E. . . . 6/6

Pioneer Engineering:
A Treatise on the Engineering Operations connected with the Settlement of Waste Lands in New Countries. By EDWARD DOBSON, M.INST.C.E. With numerous Plates. Second Edition 4/6

Iron Bridges of Moderate Span:
Their Construction and Erection. By HAMILTON W. PENDRED. With 40 Illustrations 2/0

Iron and Steel Bridges and Viaducts.
A Practical Treatise upon their Construction for the use of Engineers, Draughtsmen, and Students. By FRANCIS CAMPIN, C.E. With numerous Illustrations 3/6

Constructional Iron and Steel Work,
As applied to Public, Private, and Domestic Buildings. By FRANCIS CAMPIN, C.E. 3/6

Tubular and other Iron Girder Bridges.
Describing the Britannia and Conway Tubular Bridges. By G. DRYSDALE DEMPSEY, C.E. Fourth Edition 2/0

Materials and Construction:
A Theoretical and Practical Treatise on the Strains, Designing, and Erection of Works of Construction. By FRANCIS CAMPIN, C.E. . . 3/0

Sanitary Work in the Smaller Towns and in Villages.
By CHARLES SLAGG, Assoc. M.Inst.C.E. Third Edition . . 3/0

Roads and Streets (The Construction of).
In Two Parts: I. THE ART OF CONSTRUCTING COMMON ROADS, by H. LAW, C.E., Revised by D. K. CLARK, C.E.; II. RECENT PRACTICE: Including Pavements of Wood, Asphalte, &c. By D. K. CLARK, C.E. 4/6

Gas Works (The Construction of),
And the Manufacture and Distribution of Coal Gas. By S. HUGHES, C.E. Re-written by WILLIAM RICHARDS, C.E. Eighth Edition . . 5/6

Water Works
For the Supply of Cities and Towns. With a Description of the Principal Geological Formations of England as influencing Supplies of Water. By SAMUEL HUGHES, F.G.S., C.E. Enlarged Edition 4/0

The Power of Water,
As applied to drive Flour Mills, and to give motion to Turbines and other Hydrostatic Engines. By JOSEPH GLYNN, F.R.S. New Edition . 2/0

Wells and Well-Sinking.
By JOHN GEO. SWINDELL, A.R.I.B.A., and G. R. BURNELL, C.E. Revised Edition. With a New Appendix on the Qualities of Water. Illustrated 2/0

The Drainage of Lands, Towns, and Buildings.
By G. D. DEMPSEY, C.E. Revised, with large Additions on Recent Practice, by D. K. CLARK, M.I.C.E. Third Edition 4/6

The Blasting and Quarrying of Stone,
For Building and other Purposes. With Remarks on the Blowing up of Bridges. By Gen. Sir J. BURGOYNE, K.C.B. 1/6

Foundations and Concrete Works.
With Practical Remarks on Footings, Planking, Sand, Concrete, Béton, Pile-driving, Caissons, and Cofferdams. By E. DOBSON, M.R.I.B.A. Eighth Edition 1/6

Pneumatics,
Including Acoustics and the Phenomena of Wind Currents, for the Use of Beginners. By CHARLES TOMLINSON, F.R.S. Fourth Edition . 1/6

Land and Engineering Surveying.
For Students and Practical Use. By T. BAKER, C.E. Eighteenth Edition, Revised and Extended by F. E. DIXON, A.M. Inst. C.E., Professional Associate of the Institution of Surveyors. With numerous Illustrations and two Lithographic Plates . . . . . *[Just published* 2/0

Mensuration and Measuring.
For Students and Practical Use. With the Mensuration and Levelling of Land for the purposes of Modern Engineering. By T. BAKER, C.E. New Edition by E. NUGENT, C.E. 1/6

MINING AND METALLURGY.

Mineralogy,
Rudiments of. By A. RAMSAY, F.G.S. Fourth Edition, revised and enlarged. Woodcuts and Plates 3/6

Coal and Coal Mining,
A Rudimentary Treatise on. By the late Sir WARINGTON W. SMYTH, F.R.S. Eighth Edition, revised and extended by T. FORSTER BROWN. *[Just published* 3/6

Metallurgy of Iron.
Containing Methods of Assay, Analyses of Iron Ores, Processes of Manufacture of Iron and Steel, &c. By H. BAUERMAN, F.G.S. With numerous Illustrations. Sixth Edition, revised and enlarged 5/0

The Mineral Surveyor and Valuer's Complete Guide.
By W. LINTERN. Fourth Edition, with an Appendix on Magnetic and Angular Surveying 3/6

Slate and Slate Quarrying:
Scientific, Practical, and Commercial. By D. C. DAVIES, F.G.S. With numerous Illustrations and Folding Plates. Fourth Edition . . 3/0

A First Book of Mining and Quarrying,
With the Sciences connected therewith, for Primary Schools and Self Instruction. By J. H. COLLINS, F.G.S. Second Edition . . . 1/6

Subterraneous Surveying,
With and without the Magnetic Needle. By T. FENWICK and T. BAKER, C.E. Illustrated 2/6

Mining Tools.
Manual of. By WILLIAM MORGANS, Lecturer on Practical Mining at the Bristol School of Mines 2/6

Mining Tools, Atlas
Of Engravings to Illustrate the above, containing 235 Illustrations of Mining Tools, drawn to Scale. 4to 4/6

Physical Geology,
Partly based on Major-General PORTLOCK'S "Rudiments of Geology." By RALPH TATE, A.L.S., &c. Woodcuts 2/0

Historical Geology,
Partly based on Major-General PORTLOCK'S "Rudiments." By RALPH TATE, A.L.S., &c. Woodcuts 2/6

Geology, Physical and Historical.
Consisting of "Physical Geology," which sets forth the Leading Principles of the Science; and "Historical Geology," which treats of the Mineral and Organic Conditions of the Earth at each successive epoch. By RALPH TATE, F.G.S. 4/6

Electro-Metallurgy,
Practically Treated. By ALEXANDER WATT. Tenth Edition, enlarged and revised, including the most Recent Processes 3/6

MECHANICAL ENGINEERING.

The Workman's Manual of Engineering Drawing.
By JOHN MAXTON, Instructor in Engineering Drawing, Royal Naval College, Greenwich. Seventh Edition. 300 Plates and Diagrams . 3/6

Fuels: Solid, Liquid, and Gaseous.
Their Analysis and Valuation. For the Use of Chemists and Engineers. By H. J. PHILLIPS, F.C.S., formerly Analytical and Consulting Chemist to the Great Eastern Railway. Third Edition 2/0

Fuel, Its Combustion and Economy.
Consisting of an Abridgment of "A Treatise on the Combustion of Coal and the Prevention of Smoke." By C. W. WILLIAMS, A.I.C.E. With Extensive Additions by D. K. CLARK, M.Inst.C.E. Fourth Edition . 3/6

The Boilermaker's Assistant
In Drawing, Templating, and Calculating Boiler Work, &c. By J. COURTNEY, Practical Boilermaker. Edited by D. K. CLARK, C.E. . 2/0

The Boiler-Maker's Ready Reckoner,
With Examples of Practical Geometry and Templating for the Use of Platers, Smiths, and Riveters. By JOHN COURTNEY. Edited by D. K. CLARK, M.I.C.E. Fourth Edition 4/0

*** *The last two Works in One Volume, half-bound, entitled* "THE BOILER-MAKER'S READY-RECKONER AND ASSISTANT." By J. COURTNEY and D. K. CLARK. *Price* 7/0.

Steam Boilers:
Their Construction and Management. By R. ARMSTRONG, C.E. Illustrated 1/6

Steam and Machinery Management.
A Guide to the Arrangement and Economical Management of Machinery. By M. POWIS BALE, M.Inst.M.E. 2/6

Steam and the Steam Engine,
Stationary and Portable. Being an Extension of the Treatise on the Steam Engine of Mr. J. SEWELL. By D. K. CLARK, C.E. Fourth Edition 3/6

The Steam Engine,
A Treatise on the Mathematical Theory of, with Rules and Examples for Practical Men. By T. BAKER, C.E. 1/6

The Steam Engine.
By Dr. LARDNER. Illustrated 1/6

Locomotive Engines,
By G. D. DEMPSEY, C.E. With large Additions treating of the Modern Locomotive, by D. K. CLARK, M.Inst.C.E. 3/0

Locomotive Engine-Driving.
A Practical Manual for Engineers in charge of Locomotive Engines. By MICHAEL REYNOLDS. Tenth Edition. 3*s.* 6*d.* limp; cloth boards . 4/6

Stationary Engine-Driving.
A Practical Manual for Engineers in charge of Stationary Engines. By MICHAEL REYNOLDS. Sixth Edition. 3*s.* 6*d.* limp; cloth boards . 4/6

The Smithy and Forge.
Including the Farrier's Art and Coach Smithing. By W. J. E. CRANE. Fourth Edition 2/6

Modern Workshop Practice,
As applied to Marine, Land, and Locomotive Engines, Floating Docks, Dredging Machines, Bridges, Ship-building, &c. By J. G. WINTON. Fourth Edition, Illustrated 3/6

Mechanical Engineering.
Comprising Metallurgy, Moulding, Casting, Forging, Tools, Workshop Machinery, Mechanical Manipulation, Manufacture of the Steam Engine, &c. By FRANCIS CAMPIN, C.E. Third Edition 2/6

Details of Machinery.
Comprising Instructions for the Execution of various Works in Iron in the Fitting-Shop, Foundry, and Boiler-Yard. By FRANCIS CAMPIN, C.E. 3/0

Elementary Engineering:
A Manual for Young Marine Engineers and Apprentices. In the Form of Questions and Answers on Metals, Alloys, Strength of Materials, &c. By J. S. BREWER. Fourth Edition 1/6

Power in Motion:
Horse-power Motion, Toothed-Wheel Gearing, Long and Short Driving Bands, Angular Forces, &c. By JAMES ARMOUR, C.E. Third Edition 2/0

Iron and Heat,
Exhibiting the Principles concerned in the Construction of Iron Beams, Pillars, and Girders. By J. ARMOUR, C.E. 2/6

Practical Mechanism,
And Machine Tools. By T. BAKER, C.E. With Remarks on Tools and Machinery, by J. NASMYTH, C.E. 2/6

Mechanics:
Being a concise Exposition of the General Principles of Mechanical Science, and their Applications. By CHARLES TOMLINSON, F.R.S. . . 1/6

Cranes (The Construction of),
And other Machinery for Raising Heavy Bodies for the Erection of Buildings, &c. By JOSEPH GLYNN, F.R.S. 1/6

NAVIGATION, SHIPBUILDING, ETC.

The Sailor's Sea Book:
A Rudimentary Treatise on Navigation. By JAMES GREENWOOD, B.A. With numerous Woodcuts and Coloured Plates. New and enlarged Edition. By W. H. ROSSER 2/6

Practical Navigation.
Consisting of THE SAILOR'S SEA-BOOK, by JAMES GREENWOOD and W. H. ROSSER; together with Mathematical and Nautical Tables for the Working of the Problems, by HENRY LAW, C.E., and Prof. J. R. YOUNG. 7/0

Navigation and Nautical Astronomy,
In Theory and Practice. By Prof. J. R. YOUNG. New Edition. 2/6

Mathematical Tables,
For Trigonometrical, Astronomical, and Nautical Calculations; to which is prefixed a Treatise on Logarithms. By H. LAW, C.E. Together with a Series of Tables for Navigation and Nautical Astronomy. By Professor J. R. YOUNG. New Edition 4/0

Masting, Mast-Making, and Rigging of Ships.
Also Tables of Spars, Rigging, Blocks; Chain, Wire, and Hemp Ropes, &c., relative to every class of vessels. By ROBERT KIPPING, N.A. . 2/0

Sails and Sail-Making.
With Draughting, and the Centre of Effort of the Sails. By ROBERT KIPPING, N.A. 2/6

Marine Engines and Steam Vessels.
By R. MURRAY, C.E. Eighth Edition, thoroughly revised, with Additions by the Author and by GEORGE CARLISLE, C.E. 4/6

Naval Architecture:
An Exposition of Elementary Principles. By JAMES PEAKE . . 3/6

Ships for Ocean and River Service,
Principles of the Construction of. By HAKON A. SOMMERFELDT . 1/6

Atlas of Engravings
To Illustrate the above. Twelve large folding Plates. Royal 4to, cloth 7/6

The Forms of Ships and Boats.
By W. BLAND. Ninth Edition, with numerous Illustrations and Models 1/6

ARCHITECTURE AND THE BUILDING ARTS.

Constructional Iron and Steel Work,
As applied to Public, Private, and Domestic Buildings. By FRANCIS CAMPIN, C.E. 3/6

Building Estates:
A Treatise on the Development, Sale, Purchase, and Management of Building Land. By F. MAITLAND. Third Edition 2/0

The Science of Building:
An Elementary Treatise on the Principles of Construction. By E. WYNDHAM TARN, M.A. Lond. Fourth Edition 3/6

The Art of Building:
General Principles of Construction, Strength, and Use of Materials, Working Drawings, Specifications, &c. By EDWARD DOBSON, M.R.I.B.A. . 2/0

A Book on Building,
Civil and Ecclesiastical. By Sir EDMUND BECKETT, Q.C. (Lord GRIMTHORPE). Second Edition 4/6

Dwelling-Houses (The Erection of),
Illustrated by a Perspective View, Plans, and Sections of a Pair of Villas, with Specification, Quantities, and Estimates. By S. H. BROOKS, Architect 2/6

Cottage Building.
By C. BRUCE ALLEN. Eleventh Edition, with Chapter on Economic Cottages for Allotments, by E. E. ALLEN, C.E. 2/0

Acoustics in Relation to Architecture and Building:
The Laws of Sound as applied to the Arrangement of Buildings. By Professor T. ROGER SMITH, F.R.I.B.A. New Edition, Revised . . 1/6

The Rudiments of Practical Bricklaying.
General Principles of Bricklaying; Arch Drawing, Cutting, and Setting; Pointing; Paving, Tiling, &c. By ADAM HAMMOND. With 68 Woodcuts 1/6

The Art of Practical Brick Cutting and Setting.
By ADAM HAMMOND. With 90 Engravings 1/6

Brickwork:
A Practical Treatise, embodying the General and Higher Principles of Bricklaying, Cutting and Setting; with the Application of Geometry to Roof Tiling, &c. By F. WALKER 1/6

Bricks and Tiles,
Rudimentary Treatise on the Manufacture of; containing an Outline of the Principles of Brickmaking. By E. DOBSON, M.R.I.B.A. Additions by C. TOMLINSON, F.R.S. Illustrated 3/0

The Practical Brick and Tile Book.
Comprising: BRICK AND TILE MAKING, by E. DOBSON, M.INST.C.E.; Practical BRICKLAYING, by A. HAMMOND; BRICK-CUTTING AND SETTING, by A. HAMMOND. 550 pp. with 270 Illustrations, half-bound . . 6/0

Carpentry and Joinery—
THE ELEMENTARY PRINCIPLES OF CARPENTRY. Chiefly composed from the Standard Work of THOMAS TREDGOLD, C.E. With Additions, and TREATISE ON JOINERY, by E. W. TARN, M.A. Seventh Edition . . . 3/6

Carpentry and Joinery—Atlas
Of 35 Plates to accompany and Illustrate the foregoing book. With Descriptive Letterpress. 4to 6/0

A Practical Treatise on Handrailing;
Showing New and Simple Methods. By GEO. COLLINGS. Second Edition, Revised, including a TREATISE ON STAIRBUILDING. With Plates . 2/6

Circular Work in Carpentry and Joinery.
A Practical Treatise on Circular Work of Single and Double Curvature. By GEORGE COLLINGS. Third Edition 2/6

Roof Carpentry:
Practical Lessons in the Framing of Wood Roofs. For the Use of Working Carpenters. By GEO. COLLINGS 2/0

The Construction of Roofs of Wood and Iron;
Deduced chiefly from the Works of Robison, Tredgold, and Humber. By E. WYNDHAM TARN, M.A., Architect. Third Edition . . . 1/6

The Joints Made and Used by Builders.
By WYVILL J. CHRISTY, Architect. With 160 Woodcuts . 3/0

Shoring
And its Application: A Handbook for the Use of Students. By GEORGE H. BLAGROVE. With 31 Illustrations 1/6

The Timber Importer's, Timber Merchant's, and Builder's Standard Guide.
By R. E. GRANDY 2/0

Plumbing:
A Text-Book to the Practice of the Art or Craft of the Plumber. With Chapters upon House Drainage and Ventilation. By WM. PATON BUCHAN. Eighth Edition, Re-written and Enlarged, with 500 Illustrations . 3/6

Ventilation:
A Text Book to the Practice of the Art of Ventilating Buildings. By W. P. BUCHAN, R.P., Author of "Plumbing," &c. With 170 Illustrations 3/6

The Practical Plasterer:
A Compendium of Plain and Ornamental Plaster Work. By W. KEMP 2/0

House Painting, Graining, Marbling, & Sign Writing.
With a Course of Elementary Drawing, and a Collection of Useful Receipts. By ELLIS A. DAVIDSON. Eighth Edition. Coloured Plates . . 5/0

*** *The above, in cloth boards, strongly bound,* 6/0

A Grammar of Colouring,
Applied to Decorative Painting and the Arts. By GEORGE FIELD. New Edition, enlarged, by ELLIS A. DAVIDSON. With Coloured Plates . 3/0

Elementary Decoration
As applied to Dwelling Houses, &c. By JAMES W. FACEY. Illustrated 2/0

Practical House Decoration.
A Guide to the Art of Ornamental Painting, the Arrangement of Colours in Apartments, and the Principles of Decorative Design. By JAMES W. FACEY. 2/6

*** *The last two Works in One handsome Vol., half-bound, entitled* "HOUSE DECORATION, ELEMENTARY AND PRACTICAL," *price* 5/0

Portland Cement for Users.
By HENRY FAIJA, A.M.Inst.C.E. Third Edition, Corrected . . 2/0

Limes, Cements, Mortars, Concretes, Mastics, Plastering, &c.
By G. R. BURNELL C.E. Fifteenth Edition 1/6

Masonry and Stone-Cutting.
The Principles of Masonic Projection and their application to Construction. By EDWARD DOBSON, M.R.I.B.A. 2/6

Arches, Piers, Buttresses, &c.:
Experimental Essays on the Principles of Construction. By W. BLAND. 1/6

Quantities and Measurements,
In Bricklayers', Masons', Plasterers', Plumbers', Painters', Paperhangers', Gilders', Smiths', Carpenters' and Joiners' Work. By A. C. BEATON 1/6

The Complete Measurer:
Setting forth the Measurement of Boards, Glass, Timber and Stone. By R. HORTON. Sixth Edition 4/0

*** *The above, strongly bound in leather, price* 5/0.

Light:
An Introduction to the Science of Optics. Designed for the Use of Students of Architecture, Engineering, and other Applied Sciences. By E. WYNDHAM TARN, M.A., Author of "The Science of Building," &c. . . 1/6

Hints to Young Architects.
By GEORGE WIGHTWICK, Architect. Sixth Edition, revised and enlarged by G. HUSKISSON GUILLAUME, Architect 3/6

Architecture—Orders:
The Orders and their Æsthetic Principles. By W. H. LEEDS. Illustrated. 1/6

Architecture—Styles;
The History and Description of the Styles of Architecture of Various Countries, from the Earliest to the Present Period. By T. TALBOT BURY, F.R.I.B.A. Illustrated 2/0

*** ORDERS AND STYLES OF ARCHITECTURE, *in One Vol.*, 3/6.

Architecture—Design:
The Principles of Design in Architecture, as deducible from Nature and exemplified in the Works of the Greek and Gothic Architects. By EDW. LACY GARBETT, Architect. Illustrated 2/6

*** *The three preceding Works in One handsome Vol., half bound, entitled* "MODERN ARCHITECTURE," *price* 6/0.

Perspective for Beginners.
Adapted to Young Students and Amateurs in Architecture, Painting, &c. By GEORGE PYNE 2/0

Architectural Modelling in Paper.
By T. A. RICHARDSON. With Illustrations, engraved by O. JEWITT 1/6

Glass Staining, and the Art of Painting on Glass.
From the German of Dr. GESSERT and EMANUEL OTTO FROMBERG. With an Appendix on THE ART OF ENAMELLING 2/6

Vitruvius—The Architecture of.
In Ten Books. Translated from the Latin by JOSEPH GWILT, F.S.A., F.R.A.S. With 23 Plates 5/0

N.B.—This is the only Edition of VITRUVIUS *procurable at a moderate price.*

Grecian Architecture,
An Inquiry into the Principles of Beauty in. With an Historical View of the Rise and Progress of the Art in Greece. By the EARL OF ABERDEEN 1/0

*** *The two preceding Works in One handsome Vol., half bound, entitled* "ANCIENT ARCHITECTURE," *price* 6/0.

INDUSTRIAL AND USEFUL ARTS.

Cements, Pastes, Glues, and Gums.
A Practical Guide to the Manufacture and Application of the various Agglutinants required for Workshop, Laboratory, or Office Use. With upwards of 900 Recipes and Formulæ. By H. C. STANDAGE . . 2/0

Clocks and Watches, and Bells,
A Rudimentary Treatise on. By Sir EDMUND BECKETT, Q.C. (Lord GRIMTHORPE). Seventh Edition 4/6

The Goldsmith's Handbook.
Containing full Instructions in the Art of Alloying, Melting, Reducing, Colouring, Collecting and Refining, Recovery of Waste, Solders, Enamels, &c., &c. By GEORGE E. GEE. Fifth Edition 3/0

The Silversmith's Handbook,
On the same plan as the GOLDSMITH'S HANDBOOK. By G. E. GEE. 3/0
*** *The last two Works, in One handsome Vol., half-bound,* 7/0.

The Hall-Marking of Jewellery.
Comprising an account of all the different Assay Towns of the United Kingdom; with the Stamps and Laws relating to the Standards and Hall-Marks at the various Assay Offices. By GEORGE E. GEE . . 3/0

French Polishing and Enamelling.
A Practical Work of Instruction, including numerous Recipes for making Polishes, Varnishes, Glaze-Lacquers, Revivers, &c. By R. BITMEAD. [*Just Published.* 1/6

Practical Organ Building.
By W. E. DICKSON, M.A. Second Edition, Revised, with Additions 2/6

Coach-Building:
A Practical Treatise. By JAMES W. BURGESS. With 57 Illustrations 2/6

The Cabinet-Maker's Guide
To the Entire Construction of Cabinet-Work. By R. BITMEAD. [*Just Published.* 2/6

The Brass Founder's Manual:
Instructions for Modelling, Pattern Making, Moulding, Turning, &c. By W. GRAHAM 2/0

The Sheet-Metal Worker's Guide.
A Practical Handbook for Tinsmiths, Coppersmiths, Zincworkers, &c., with 46 Diagrams. By W. J. E. CRANE. Third Edition, revised . . 1/6

Sewing Machinery:
Its Construction, History, &c. With full Technical Directions for Adjusting, &c. By J. W. URQUHART, C.E. 2/0

Gas Fitting:
A Practical Handbook. By JOHN BLACK. New Edition . . 2/6

Construction of Door Locks.
From the Papers of A. C. HOBBS. Edited by C. TOMLINSON, F.R.S. 2/6

The Model Locomotive Engineer, Fireman, and Engine-Boy.
By MICHAEL REYNOLDS 3/6

The Art of Letter Painting made Easy.
By J. G. BADENOCH. With 12 full-page Engravings of Examples . 1/6

The Art of Boot and Shoemaking.
Including Measurement, Last-fitting, Cutting-out, Closing and Making. By JOHN BEDFORD LENO. With numerous Illustrations. Fourth Edition 2/0

Mechanical Dentistry:
A Practical Treatise on the Construction of the Various Kinds of Artificial Dentures. By CHARLES HUNTER. Fourth Edition . . . 3/0

Wood Engraving:
A Practical and Easy Introduction to the Art. By W. N. BROWN . 1/6

Laundry Management.
A Handbook for Use in Private and Public Laundries. By the EDITOR of "The Laundry Journal." 2/0

AGRICULTURE, GARDENING, ETC.

Draining and Embanking:
A Practical Treatise. By Prof. JOHN SCOTT. With 68 Illustrations **1/6**

Irrigation and Water Supply:
A Practical Treatise on Water Meadows, Sewage Irrigation, Warping, &c.; on the Construction of Wells, Ponds, Reservoirs, &c. By Prof. JOHN SCOTT. With 34 Illustrations **1/6**

Farm Roads, Fences, and Gates:
A Practical Treatise on the Roads, Tramways, and Waterways of the Farm; the Principles of Enclosures; and the different kinds of Fences, Gates, and Stiles. By Prof. JOHN SCOTT. With 75 Illustrations . **1/6**

Farm Buildings:
A Practical Treatise on the Buildings necessary for various kinds of Farms, their Arrangement and Construction, with Plans and Estimates. By Prof. JOHN SCOTT. With 105 Illustrations **2/0**

Barn Implements and Machines:
Treating of the Application of Power and Machines used in the Threshing-barn, Stockyard, Dairy, &c. By Prof. J. SCOTT. With 123 Illustrations. **2/0**

Field Implements and Machines:
With Principles and Details of Construction and Points of Excellence, their Management, &c. By Prof. JOHN SCOTT. With 138 Illustrations **2/0**

Agricultural Surveying:
A Treatise on Land Surveying, Levelling, and Setting-out; with Directions for Valuing Estates. By Prof. J. SCOTT. With 62 Illustrations . **1/6**

Farm Engineering.
By Professor JOHN SCOTT. Comprising the above Seven Volumes in One, 1,150 pages, and over 600 Illustrations. Half-bound **12/0**

Outlines of Farm Management.
Treating of the General Work of the Farm; Stock; Contract Work; Labour, &c. By R. SCOTT BURN **2/6**

Outlines of Landed Estates Management.
Treating of the Varieties of Lands, Methods of Farming, Setting-out of Farms, Roads, Fences, Gates, Drainage, &c. By R. SCOTT BURN . **2/6**
**** The above Two Vols. in One, handsomely half-bound, price* **6/0**

Soils, Manures, and Crops.
(Vol. I. OUTLINES OF MODERN FARMING.) By R. SCOTT BURN . **2/0**

Farming and Farming Economy.
(Vol. II. OUTLINES OF MODERN FARMING.) By R. SCOTT BURN **3/0**

Stock: Cattle, Sheep, and Horses.
(Vol. III. OUTLINES OF MODERN FARMING.) By R. SCOTT BURN **2/6**

Dairy, Pigs, and Poultry.
(Vol. IV. OUTLINES OF MODERN FARMING.) By R. SCOTT BURN **2/0**

Utilization of Sewage, Irrigation, and Reclamation of Waste Land.
(Vol. V. OUTLINES OF MODERN FARMING.) By R. SCOTT BURN . **2/6**

Outlines of Modern Farming.
By R. SCOTT BURN. Consisting of the above Five Volumes in One, 1,250 pp., profusely Illustrated, half-bound **12/0**

Book-keeping for Farmers and Estate Owners.
A Practical Treatise, presenting, in Three Plans, a System adapted for all classes of Farms. By J. M. WOODMAN. Third Edition, revised . 2/6

Ready Reckoner for the Admeasurement of Land.
By A. ARMAN. Fourth Edition, revised and extended by C. NORRIS 2/0

Miller's, Corn Merchant's, and Farmer's Ready Reckoner.
Second Edition, revised, with a Price List of Modern Flour Mill Machinery, by W. S. HUTTON, C.E. 2/0

The Hay and Straw Measurer.
New Tables for the Use of Auctioneers, Valuers, Farmers, Hay and Straw Dealers, &c. By JOHN STEELE 2/0

Meat Production.
A Manual for Producers, Distributors, and Consumers of Butchers' Meat. By JOHN EWART 2/6

Sheep:
The History, Structure, Economy, and Diseases of. By W. C. SPOONER, M.R.V.S. Fifth Edition, with fine Engravings 3/6

Market and Kitchen Gardening.
By C. W. SHAW, late Editor of "Gardening Illustrated" . . . 3/0

Kitchen Gardening Made Easy.
Showing the best means of Cultivating every known Vegetable and Herb, &c., with directions for management all the year round. By GEORGE M. F. GLENNY. Illustrated 1/6

Cottage Gardening:
Or Flowers, Fruits, and Vegetables for Small Gardens. By E. HOBDAY. 1/6

Garden Receipts.
Edited by CHARLES W. QUIN 1/6

Fruit Trees,
The Scientific and Profitable Culture of. From the French of M. DU BREUIL. Fifth Edition, carefully Revised by GEORGE GLENNY. With 187 Woodcuts 3/6

The Tree Planter and Plant Propagator:
With numerous Illustrations of Grafting, Layering, Budding, Implements, Houses, Pits, &c. By SAMUEL WOOD 2/0

The Tree Pruner:
A Practical Manual on the Pruning of Fruit Trees, Shrubs, Climbers, and Flowering Plants. With numerous Illustrations. By SAMUEL WOOD 1/6

*** *The above Two Vols. in One, handsomely half-bound, price* 3/6

The Art of Grafting and Budding.
By CHARLES BALTET. With Illustrations 2/6

MATHEMATICS, ARITHMETIC, ETC.

Descriptive Geometry,
An Elementary Treatise on; with a Theory of Shadows and of Perspective, extracted from the French of G. MONGE. To which is added a Description of the Principles and Practice of Isometrical Projection. By J. F. HEATHER, M.A. With 14 Plates 2/0

Practical Plane Geometry:
Giving the Simplest Modes of Constructing Figures contained in one Plane and Geometrical Construction of the Ground. By J. F. HEATHER, M.A. With 215 Woodcuts 2/0

Analytical Geometry and Conic Sections,
A Rudimentary Treatise on. By JAMES HANN. A New Edition, re-written and enlarged by Professor J. R. YOUNG 2/0

Euclid (The Elements of).
With many Additional Propositions and Explanatory Notes; to which is prefixed an Introductory Essay on Logic. By HENRY LAW, C.E. . 2/6

*** *Sold also separately, viz:—*

Euclid. The First Three Books. By HENRY LAW, C.E. 1/6
Euclid. Books 4, 5, 6, 11, 12. By HENRY LAW, C.E. 1/6

Plane Trigonometry,
The Elements of. By JAMES HANN. 1/6

Spherical Trigonometry,
The Elements of. By JAMES HANN. Revised by CHARLES H. DOWLING, C.E. 1/0
*** *Or with "The Elements of Plane Trigonometry," in One Volume,* 2/6

Differential Calculus,
Elements of the. By W. S. B. WOOLHOUSE, F.R.A.S., &c. . . 1/6

Integral Calculus.
By HOMERSHAM COX, B.A. 1/6

Algebra,
The Elements of. By JAMES HADDON, M.A. With Appendix, containing Miscellaneous Investigations, and a Collection of Problems . . 2/0

A Key and Companion to the Above.
An extensive Repository of Solved Examples and Problems in Algebra. By J. R. YOUNG 1/6

Commercial Book-keeping.
With Commercial Phrases and Forms in English, French, Italian, and German. By JAMES HADDON, M.A. 1/6

Arithmetic,
A Rudimentary Treatise on. With full Explanations of its Theoretical Principles, and numerous Examples for Practice. For the Use of Schools and for Self-Instruction. By J. R. YOUNG, late Professor of Mathematics in Belfast College. Thirteenth Edition 1/6

A Key to the Above.
By J. R. YOUNG 1/6

Equational Arithmetic,
Applied to Questions of Interest, Annuities, Life Assurance, and General Commerce; with various Tables by which all Calculations may be greatly facilitated. By W. HIPSLEY 1/6

Arithmetic,
Rudimentary, for the Use of Schools and Self-Instruction. By JAMES HADDON, M.A. Revised by ABRAHAM ARMAN 1/6

A Key to the Above.
By A. ARMAN 1/6

Mathematical Instruments:
Their Construction, Adjustment, Testing, and Use concisely Explained. By J. F. HEATHER, M.A., of the Royal Military Academy, Woolwich. Fourteenth Edition, Revised, with Additions, by A. T. WALMISLEY, M.I.C.E. Original Edition, in 1 vol., Illustrated 2/0

*** *In ordering the above, be careful to say "Original Edition," or give the number in the Series* (32), *to distinguish it from the Enlarged Edition in* 3 *vols.* (*as follows*)—

Drawing and Measuring Instruments.
Including—I. Instruments employed in Geometrical and Mechanical Drawing, and in the Construction, Copying, and Measurement of Maps and Plans. II. Instruments used for the purposes of Accurate Measurement, and for Arithmetical Computations. By J. F. HEATHER, M.A. . 1/6

Optical Instruments.
Including (more especially) Telescopes, Microscopes, and Apparatus for producing copies of Maps and Plans by Photography. By J. F. HEATHER, M.A. Illustrated 1/6

Surveying and Astronomical Instruments.
Including—I. Instruments used for Determining the Geometrical Features of a portion of Ground. II. Instruments employed in Astronomical Observations. By J. F. HEATHER, M.A. Illustrated. . . . 1/6

*** *The above three volumes form an enlargement of the Author's original work, "Mathematical Instruments," price* 2/0. (*Described at top of page.*)

Mathematical Instruments:
Their Construction, Adjustment, Testing and Use. Comprising Drawing, Measuring, Optical, Surveying, and Astronomical Instruments. By J. F. HEATHER, M.A. Enlarged Edition, for the most part entirely re-written. The Three Parts as above, in One thick Volume. 4/6

The Slide Rule, and How to Use It.
Containing full, easy, and simple Instructions to perform all Business Calculations with unexampled rapidity and accuracy. By CHARLES HOARE, C.E. With a Slide Rule, in tuck of cover. Seventh Edition . . 2/6

Logarithms.
With Mathematical Tables for Trigonometrical, Astronomical, and Nautical Calculations. By HENRY LAW, C.E. Revised Edition . . . 3/0

Compound Interest and Annuities (Theory of).
With Tables of Logarithms for the more Difficult Computations of Interest, Discount, Annuities, &c., in all their Applications and Uses for Mercantile and State Purposes. By FEDOR THOMAN, Paris. Fourth Edition . 4/0

Mathematical Tables,
For Trigonometrical, Astronomical, and Nautical Calculations; to which is prefixed a Treatise on Logarithms. By H. LAW, C.E. Together with a Series of Tables for Navigation and Nautical Astronomy. By Professor J. R. YOUNG. New Edition 4/0

Mathematics,
As applied to the Constructive Arts. By FRANCIS CAMPIN, C.E., &c. Third Edition 3/0

Astronomy.
By the late Rev. ROBERT MAIN, F.R.S. Third Edition, revised and corrected to the Present Time. By W. T. LYNN, F.R.A.S. . . . 2/0

Statics and Dynamics.
The Principles and Practice of. Embracing also a clear development of Hydrostatics, Hydrodynamics, and Central Forces. By T. BAKER, C.E. Fourth Edition 1/6

BOOKS OF REFERENCE AND MISCELLANEOUS VOLUMES.

A Dictionary of Painters, and Handbook for Picture Amateurs.
Being a Guide for Visitors to Public and Private Picture Galleries, and for Art-Students, including Glossary of Terms, Sketch of Principal Schools of Painting, &c. By PHILIPPE DARYL, B.A. 2/6

Painting Popularly Explained.
By T. J. GULLICK, Painter, and JOHN TIMBS, F.S.A. Including Fresco, Oil, Mosaic, Water Colour, Water-Glass, Tempera Encaustic, Miniature, Painting on Ivory, Vellum, Pottery, Enamel, Glass, &c. Sixth Edition 5/0

A Dictionary of Terms used in Architecture, Building, Engineering, Mining, Metallurgy, Archæology, the Fine Arts, &c.
By JOHN WEALE. Sixth Edition. Edited by R. HUNT, F.R.S. . 5/0

Music:
A Rudimentary and Practical Treatise. With numerous Examples. By CHARLES CHILD SPENCER 2/6

Pianoforte,
The Art of Playing the. With numerous Exercises and Lessons. By CHARLES CHILD SPENCER 1/6

The House Manager.
A Guide to Housekeeping, Cookery, Pickling and Preserving, Household Work, Dairy Management, Cellarage of Wines, Home-brewing and Wine-making, Gardening, &c. By AN OLD HOUSEKEEPER . . 3/6

Manual of Domestic Medicine.
By R. GOODING, M.D. Intended as a Family Guide in all cases of Accident and Emergency. Third Edition, carefully revised . . 2/0

Management of Health.
A Manual of Home and Personal Hygiene. By Rev. JAMES BAIRD 1/0

Natural Philosophy,
For the Use of Beginners. By CHARLES TOMLINSON, F.R.S. . . 1/6

The Elementary Principles of Electric Lighting.
By ALAN A. CAMPBELL SWINTON, M.INST.C.E., M.I.E.E. Fourth Edition, Revised . . . . . [*Just Published* 1/6

The Electric Telegraph,
Its History and Progress. By R. SABINE, C.E., F.S.A., &c. . . 3/0

Handbook of Field Fortification.
By Major W. W. KNOLLYS, F.R.G.S. With 163 Woodcuts . . 3/0

Logic,
Pure and Applied. By S. H. EMMENS. Third Edition . . . 1/6

Locke on the Human Understanding,
Selections from. With Notes by S. H. EMMENS 1/6

The Compendious Calculator
(*Intuitive Calculations*). Or Easy and Concise Methods of Performing the various Arithmetical Operations required in Commercial and Business Transactions; together with Useful Tables, &c. By DANIEL O'GORMAN. Twenty-seventh Edition, carefully revised by C. NORRIS . . . 2/6

Measures, Weights, and Moneys of all Nations.
With an Analysis of the Christian, Hebrew, and Mahometan Calendars. By W. S. B. WOOLHOUSE, F.R.A.S., F.S.S. Seventh Edition . 2/6

Grammar of the English Tongue,
Spoken and Written. With an Introduction to the Study of Comparative Philology. By HYDE CLARKE, D.C.L. Fifth Edition. . . . 1/6

Dictionary of the English Language.
As Spoken and Written. Containing above 100,000 Words. By HYDE CLARKE, D.C.L. 3/6
Complete with the GRAMMAR, 5/6

Composition and Punctuation,
Familiarly Explained for those who have neglected the Study of Grammar. By JUSTIN BRENAN. 18th Edition. 1/6

French Grammar.
With Complete and Concise Rules on the Genders of French Nouns. By G. L. STRAUSS, Ph.D. 1/6

English-French Dictionary.
Comprising a large number of Terms used in Engineering, Mining, &c. By ALFRED ELWES 2/0

French Dictionary.
In two Parts—I. French-English. II. English-French, complete in One Vol. 3/0
*** *Or with the* GRAMMAR, 4/6.

French and English Phrase Book.
Containing Introductory Lessons, with Translations, Vocabularies of Words, Collection of Phrases, and Easy Familiar Dialogues 1/6

German Grammar.
Adapted for English Students, from Heyse's Theoretical and Practical Grammar, by Dr. G. L. STRAUSS 1/6

German Triglot Dictionary.
By N. E. S. A. HAMILTON. Part I. German-French-English. Part II. English-German-French. Part III. French-German-English . . 3/0

German Triglot Dictionary.
(As above). Together with German Grammar, in One Volume . 5/0

Italian Grammar.
Arranged in Twenty Lessons, with Exercises. By ALFRED ELWES. 1/6

Italian Triglot Dictionary,
Wherein the Genders of all the Italian and French Nouns are carefully noted down. By ALFRED ELWES. Vol. I. Italian-English-French. 2/6

Italian Triglot Dictionary.
By ALFRED ELWES. Vol. II. English-French-Italian 2/6

Italian Triglot Dictionary.
By ALFRED ELWES. Vol. III. French-Italian-English 2/6

Italian Triglot Dictionary.
(As above). In One Vol. 7/6

Spanish Grammar.
In a Simple and Practical Form. With Exercises. By ALFRED ELWES 1/6

Spanish-English and English-Spanish Dictionary.
Including a large number of Technical Terms used in Mining, Engineering, &c., with the proper Accents and the Gender of every Noun. By ALFRED ELWES 4/0
*** *Or with the* GRAMMAR, 6/0.

Portuguese Grammar,
In a Simple and Practical Form. With Exercises. By ALFRED ELWES 1/6

Portuguese-English and English-Portuguese Dictionary.
Including a large number of Technical Terms used in Mining, Engineering, &c., with the proper Accents and the Gender of every Noun. By ALFRED ELWES. Third Edition, revised 5/0

*** *Or with the* GRAMMAR, 7/0.

Animal Physics,
Handbook of. By DIONYSIUS LARDNER, D.C.L. With 520 Illustrations. In One Vol. (732 pages), cloth boards 7/6

*** *Sold also in Two Parts, as follows:—*

ANIMAL PHYSICS. By Dr. LARDNER. Part I., Chapters I.—VII. 4/0

ANIMAL PHYSICS. By Dr. LARDNER. Part II., Chapters VIII.—XVIII. 3/0

BRADBURY, AGNEW & CO., LD., PRINTERS, LONDON AND TONBRIDGE.

CROSBY LOCKWOOD & SON'S

Catalogue of

Scientific, Technical and Industrial Books.

	PAGE		PAGE
MECHANICAL ENGINEERING	1	CARPENTRY & TIMBER	28
CIVIL ENGINEERING	10	DECORATIVE ARTS	30
MARINE ENGINEERING, &c.	17	NATURAL SCIENCE	32
MINING & METALLURGY	19	CHEMICAL MANUFACTURES	34
COLLIERY WORKING, &c.	21	INDUSTRIAL ARTS	36
ELECTRICITY	23	COMMERCE, TABLES, &c.	41
ARCHITECTURE & BUILDING	25	AGRICULTURE & GARDENING	43
SANITATION & WATER SUPPLY	27	AUCTIONEERING, VALUING, &c.	46

LAW & MISCELLANEOUS . . . 47

MECHANICAL ENGINEERING, &c.

THE MECHANICAL ENGINEER'S POCKET-BOOK.

Comprising Tables, Formulæ, Rules, and Data: A Handy Book of Reference for Daily Use in Engineering Practice. By D. KINNEAR CLARK, M. Inst. C.E., Fourth Edition. Small 8vo, 700 pp., bound in flexible Leather Cover, rounded corners **6/0**

SUMMARY OF CONTENTS:—MATHEMATICAL TABLES.—MEASUREMENT OF SURFACES AND SOLIDS.—ENGLISH AND FOREIGN WEIGHTS AND MEASURES.—MONEYS.—SPECIFIC GRAVITY, WEIGHT, AND VOLUME.—MANUFACTURED METALS.—STEEL PIPES.—BOLTS AND NUTS.—SUNDRY ARTICLES IN WROUGHT AND CAST IRON, COPPER, BRASS, LEAD, TIN, ZINC.—STRENGTH OF TIMBER.—STRENGTH OF CAST IRON.—STRENGTH OF WROUGHT IRON.—STRENGTH OF STEEL.—TENSILE STRENGTH OF COPPER, LEAD, &c.—RESISTANCE OF STONES AND OTHER BUILDING MATERIALS.—RIVETED JOINTS IN BOILER PLATES.—BOILER SHELLS.—WIRE ROPES AND HEMP ROPES.—CHAINS AND CHAIN CABLES.—FRAMING.—HARDNESS OF METALS, ALLOYS, AND STONES.—LABOUR OF ANIMALS.—MECHANICAL PRINCIPLES.—GRAVITY AND FALL OF BODIES.—ACCELERATING AND RETARDING FORCES.—MILL GEARING, SHAFTING, &c.—TRANSMISSION OF MOTIVE POWER.—HEAT.—COMBUSTION: FUELS.—WARMING, VENTILATION, COOKING STOVES.—STEAM.—STEAM ENGINES AND BOILERS.—RAILWAYS.—TRAMWAYS.—STEAM SHIPS.—PUMPING STEAM ENGINES AND PUMPS.—COAL GAS, GAS ENGINES, &c.—AIR IN MOTION.—COMPRESSED AIR.—HOT AIR ENGINES.—WATER POWER.—SPEED OF CUTTING TOOLS.—COLOURS.—ELECTRICAL ENGINEERING.

"Mr. Clark manifests what is an innate perception of what is likely to be useful in a pocket-book, and he is really unrivalled in the art of condensation. It is very difficult to hit upon any mechanical engineering subject concerning which this work supplies no information, and the excellent index at the end adds to its utility. In one word, it is an exceedingly handy and efficient tool, possessed of which the engineer will be saved many a wearisome calculation, or yet more wearisome hunt through various text-books and treatises, and, as such, we can heartily recommend it to our readers."—*The Engineer.*

"It would be found difficult to compress more matter within a similar compass, or produce a book of 650 pages which should be more compact or convenient for pocket reference. . . . Will be appreciated by mechanical engineers of all classes."—*Practical Engineer.*

MR. HUTTON'S PRACTICAL HANDBOOKS.

THE WORKS' MANAGER'S HANDBOOK.

Comprising Modern Rules, Tables, and Data. For Engineers, Millwrights, and Boiler Makers; Tool Makers, Machinists, and Metal Workers; Iron and Brass Founders, &c. By W. S. HUTTON, Civil and Mechanical Engineer, Author of "The Practical Engineer's Handbook." Sixth Edition, carefully Revised, with Additions. In One handsome Volume, medium 8vo, strongly bound. [*Just Published.* **15/0**

☞ *The Author having compiled Rules and Data for his own use in a great variety of modern engineering work, and having found his notes extremely useful, decided to publish them—revised to date—believing that a practical work, suited to the* DAILY REQUIREMENTS OF MODERN ENGINEERS, *would be favourably received.*

"Of this edition we may repeat the appreciative remarks we made upon the first and third. Since the appearance of the latter very considerable modifications have been made, although the total number of pages remains almost the same. It is a very useful collection of rules, tables, and workshop and drawing office data."—*The Engineer*, May 10, 1895.

"The author treats every subject from the point of view of one who has collected workshop notes for application in workshop practice, rather than from the theoretical or literary aspect. The volume contains a great deal of that kind of information which is gained only by practical experience, and is seldom written in books."—*The Engineer*, June 5, 1885.

"The volume is an exceedingly useful one, brimful with engineer's notes, memoranda, and rules, and well worthy of being on every mechanical engineer's bookshelf."—*Mechanical World.*

"The information is precisely that likely to be required in practice. . . . The work forms a desirable addition to the library not only of the works' manager, but of any one connected with general engineering."—*Mining Journal.*

"Brimful of useful information, stated in a concise form, Mr. Hutton's books have met a pressing want among engineers. The book must prove extremely useful to every practical man possessing a copy."—*Practical Engineer.*

THE PRACTICAL ENGINEER'S HANDBOOK.

Comprising a Treatise on Modern Engines and Boilers, Marine, Locomotive, and Stationary. And containing a large collection of Rules and Practical Data relating to Recent Practice in Designing and Constructing all kinds of Engines, Boilers, and other Engineering work. The whole constituting a comprehensive Key to the Board of Trade and other Examinations for Certificates of Competency in Modern Mechanical Engineering. By WALTER S. HUTTON, Civil and Mechanical Engineer, Author of "The Works' Manager's Handbook for Engineers," &c. With upwards of 370 Illustrations. Fifth Edition, Revised with Additions. Medium 8vo, nearly 500 pp., strongly bound. [*Just Published.* **18/0**

☞ *This Work is designed as a companion to the Author's* "WORKS' MANAGER'S HANDBOOK." *It possesses many new and original features, and contains, like its predecessor, a quantity of matter not originally intended for publication but collected by the Author for his own use in the construction of a great variety of* MODERN ENGINEERING WORK.

The information is given in a condensed and concise form, and is illustrated by upwards of 370 Woodcuts; and comprises a quantity of tabulated matter of great value to all engaged in designing, constructing, or estimating for ENGINES, BOILERS, *and* OTHER ENGINEERING WORK.

"We have kept it at hand for several weeks, referring to it as occasion arose, and we have not on a single occasion consulted its pages without finding the information of which we were in quest." —*Athenæum.*

"A thoroughly good practical handbook, which no engineer can go through without learning something that will be of service to him."—*Marine Engineer.*

"An excellent book of reference for engineers, and a valuable text-book for students of engineering."—*Scotsman.*

"This valuable manual embodies the results and experience of the leading authorities on mechanical engineering."—*Building News.*

"The author has collected together a surprising quantity of rules and practical data, and has shown much judgment in the selections he has made. . . . There is no doubt that this book is one of the most useful of its kind published, and will be a very popular compendium."—*Engineer.*

"A mass of information set down in simple language, and in such a form that it can be easily referred to at any time. The matter is uniformly good and well chosen, and is greatly elucidated by the illustrations. The book will find its way on to most engineers' shelves, where it will rank as one of the most useful books of reference."—*Practical Engineer.*

"Full of useful information, and should be found on the office shelf of all practical engineers" —*English Mechanic.*

MR. HUTTON'S PRACTICAL HANDBOOKS—*continued.*

STEAM BOILER CONSTRUCTION.

A Practical Handbook for Engineers, Boiler-Makers, and Steam Users. Containing a large Collection of Rules and Data relating to Recent Practice in the Design, Construction, and Working of all Kinds of Stationary, Locomotive, and Marine Steam-Boilers. By WALTER S. HUTTON, Civil and Mechanical Engineer, Author of "The Works' Manager's Handbook," "The Practical Engineer's Handbook," &c. With upwards of 500 Illustrations. Third Edition, Revised and much Enlarged, medium 8vo, cloth . . **18/0**

☛ THIS WORK *is issued in continuation of the Series of Handbooks written by the Author, viz.:*—"THE WORKS' MANAGER'S HANDBOOK" *and* "THE PRACTICAL ENGINEER'S HANDBOOK," *which are so highly appreciated by engineers for the practical nature of their information; and is consequently written in the same style as those works.*

The Author believes that the concentration, in a convenient form for easy reference, of such a large amount of thoroughly practical information on Steam-Boilers, will be of considerable service to those for whom it is intended, and he trusts the book may be deemed worthy of as favourable a reception as has been accorded to its predecessors.

"One of the best, if not the best, books on boilers that has ever been published. The information is of the right kind, in a simple and accessible form. So far as generation is concerned, this is, undoubtedly, the standard book on steam practice."—*Electrical Review.*

"Every detail, both in boiler design and management, is clearly laid before the reader. The volume shows that boiler construction has been reduced to the condition of one of the most exact sciences; and such a book is of the utmost value to the *fin de siècle* Engineer and Works Manager."—*Marine Engineer.*

"There has long been room for a modern handbook on steam boilers; there is not that room now, because Mr. Hutton has filled it. It is a thoroughly practical book for those who are occupied in the construction, design, selection, or use of boilers."—*Engineer.*

"The book is of so important and comprehensive a character that it must find its way into the libraries of every one interested in boiler using or boiler manufacture if they wish to be thoroughly informed. We strongly recommend the book for the intrinsic value of its contents."—*Machinery Market.*

PRACTICAL MECHANICS' WORKSHOP COMPANION.

Comprising a great variety of the most useful Rules and Formulæ in Mechanical Science, with numerous Tables of Practical Data and Calculated Results for Facilitating Mechanical Operations. By WILLIAM TEMPLETON, Author of "The Engineer's Practical Assistant," &c., &c. Eighteenth Edition, Revised, Modernised, and considerably Enlarged by WALTER S. HUTTON, C.E., Author of "The Works' Manager's Handbook," "The Practical Engineer's Handbook," &c. Fcap. 8vo, nearly 500 pp., with 8 Plates and upwards of 250 Illustrative Diagrams, strongly bound for workshop or pocket wear and tear. **6/0**

"In its modernised form Hutton's 'Templeton' should have a wide sale, for it contains much valuable information which the mechanic will often find of use, and not a few tables and notes which he might look for in vain in other works. This modernised edition will be appreciated by all who have learned to value the original editions of 'Templeton.'"—*English Mechanic.*

"It has met with great success in the engineering workshop, as we can testify; and there are a great many men who, in a great measure, owe their rise in life to this little book."—*Building News.*

"This familiar text-book—well known to all mechanics and engineers—is of essential service to the every-day requirements of engineers, millwrights, and the various trades connected with engineering and building. The new modernised edition is worth its weight in gold."—*Building News.* (Second Notice.)

"This well-known and largely-used book contains information, brought up to date, of the sort so useful to the foreman and draughtsman. So much fresh information has been introduced as to constitute it practically a new book. It will be largely used in the office and workshop."—*Mechanical World.*

"The publishers wisely entrusted the task of revision of this popular, valuable, and useful book to Mr. Hutton, than whom a more competent man they could not have found."—*Iron.*

ENGINEER'S AND MILLWRIGHT'S ASSISTANT.

A Collection of Useful Tables, Rules, and Data. By WILLIAM TEMPLETON. Eighth Edition, with Additions. 18mo, cloth **2/6**

"Occupies a foremost place among books of this kind. A more suitable present to an apprentice to any of the mechanical trades could not possibly be made."—*Building News.*

A deservedly popular work. It should be in the 'drawer' of every mechanic."—*English Mechanic.*

THE MECHANICAL ENGINEER'S REFERENCE BOOK.

For Machine and Boiler Construction. In Two Parts. Part I. GENERAL ENGINEERING DATA. Part II. BOILER CONSTRUCTION. With 51 Plates and numerous Illustrations. By NELSON FOLEY, M.I.N.A. Second Edition, Revised throughout and much Enlarged. Folio, half-bound, net . **£3 3s.**

PART I.—MEASURES.—CIRCUMFERENCES AND AREAS, &c., SQUARES, CUBES, FOURTH POWERS.—SQUARE AND CUBE ROOTS.—SURFACE OF TUBES.—RECIPROCALS.—LOGARITHMS. — MENSURATION. — SPECIFIC GRAVITIES AND WEIGHTS.—WORK AND POWER. — HEAT. — COMBUSTION. — EXPANSION AND CONTRACTION. — EXPANSION OF GASES.—STEAM.—STATIC FORCES.—GRAVITATION AND ATTRACTION.—MOTION AND COMPUTATION OF RESULTING FORCES.—ACCUMULATED WORK.—CENTRE AND RADIUS OF GYRATION.—MOMENT OF INERTIA.—CENTRE OF OSCILLATION.—ELECTRICITY.—STRENGTH OF MATERIALS.—ELASTICITY.—TEST SHEETS OF METALS.—FRICTION.—TRANSMISSION OF POWER.—FLOW OF LIQUIDS.—FLOW OF GASES.—AIR PUMPS, SURFACE CONDENSERS, &c.—SPEED OF STEAMSHIPS.—PROPELLERS.—CUTTING TOOLS.—FLANGES.—COPPER SHEETS AND TUBES.—SCREWS, NUTS, BOLT HEADS, &c.—VARIOUS RECIPES AND MISCELLANEOUS MATTER.—WITH DIAGRAMS FOR VALVE-GEAR, BELTING AND ROPES, DISCHARGE AND SUCTION PIPES, SCREW PROPELLERS, AND COPPER PIPES.

PART II.—TREATING OF POWER OF BOILERS.—USEFUL RATIOS.—NOTES ON CONSTRUCTION. — CYLINDRICAL BOILER SHELLS. — CIRCULAR FURNACES. — FLAT PLATES.—STAYS. — GIRDERS.—SCREWS. — HYDRAULIC TESTS. — RIVETING. — BOILER SETTING, CHIMNEYS, AND MOUNTINGS.—FUELS, &c.—EXAMPLES OF BOILERS AND SPEEDS OF STEAMSHIPS.—NOMINAL AND NORMAL HORSE POWER.—WITH DIAGRAMS FOR ALL BOILER CALCULATIONS AND DRAWINGS OF MANY VARIETIES OF BOILERS.

"Mr. Foley is well fitted to compile such a work. . . . The diagrams are a great feature of the work. . . . Regarding the whole work, it may be very fairly stated that Mr. Foley has produced a volume which will undoubtedly fulfil the desire of the author and become indispensable to all mechanical engineers."—*Marine Engineer.*

"We have carefully examined this work, and pronounce it a most excellent reference book for the use of marine engineers."—*Journal of American Society of Naval Engineers.*

COAL AND SPEED TABLES.

A Pocket Book for Engineers and Steam Users. By NELSON FOLEY, Author of "The Mechanical Engineer's Reference Book." Pocket-size, cloth . **3/6**

TEXT-BOOK ON THE STEAM ENGINE.

With a Supplement on GAS ENGINES, and PART II. on HEAT ENGINES. By T. M. GOODEVE, M.A., Barrister-at-Law, Professor of Mechanics at the Royal College of Science, London; Author of "The Principles of Mechanics," "The Elements of Mechanism," &c. Fourteenth Edition. Crown 8vo, cloth . **6/0**

"Professor Goodeve has given us a treatise on the steam engine which will bear comparison with anything written by Huxley or Maxwell, and we can award it no higher praise."—*Engineer.*

ON GAS ENGINES.

With Appendix describing a Recent Engine with Tube Igniter. By T. M. GOODEVE, M.A. Crown 8vo, cloth **2/6**

"Like all Mr. Goodeve's writings, the present is no exception in point of general excellence. It is a valuable little volume."—*Mechanical World.*

THE GAS-ENGINE HANDBOOK.

A Manual of Useful Information for the Designer and the Engineer. By E. W. ROBERTS, M.E. With Forty Full-page Engravings. Small Fcap. 8vo, leather. [*Just Published. Net* **8/6**

A TREATISE ON STEAM BOILERS.

Their Strength, Construction, and Economical Working. By R. WILSON, C.E. Fifth Edition. 12mo, cloth **6/0**

"The best treatise that has ever been published on steam boilers."—*Engineer.*

"The author shows himself perfect master of his subject, and we heartily recommend all employing steam power to possess themselves of the work."—*Ryland's Iron Trade Circular.*

THE MECHANICAL ENGINEER'S COMPANION

of Areas, Circumferences, Decimal Equivalents, in inches and feet, millimetres, squares, cubes, roots, &c.; Weights, Measures, and other Data. Also Practical Rules for Modern Engine Proportions. By R. EDWARDS, M.Inst.C.E. Fcap. 8vo, cloth. [*Just Published.* **3/6**

"A very useful little volume. It contains many tables, classified data and memoranda, generally useful to engineers."—*Engineer.*

"What it professes to be, 'a handy office companion,' giving in a succinct form, a variety of information likely to be required by engineers in their everyday office work."—*Nature.*

A HANDBOOK ON THE STEAM ENGINE.

With especial Reference to Small and Medium-sized Engines. Engine Makers, Mechanical Draughtsmen, Engineering Students, — of Steam Power. By HERMAN HAEDER, C.E. Translated from the German with considerable additions and alterations, by H. H. P. POWLES, A.M.I.C.E., M.I.M.E. Second Edition, Revised. With nearly 1,100 Illustrations. Crown 8vo, cloth **9/0**

"A perfect encyclopædia of the steam engine and its details, and one which must take a permanent place in English drawing-offices and workshops."—*A Foreman Pattern-maker.*

"This is an excellent book, and should be in the hands of all who are interested in the construction and design of medium-sized stationary engines. . . . A careful study of its contents and the arrangement of the sections leads to the conclusion that there is probably no other book like it in this country. The volume aims at showing the results of practical experience, and it certainly may claim a complete achievement of this idea."—*Nature.*

"There can be no question as to its value. We cordially commend it to all concerned in the design and construction of the steam engine."—*Mechanical World.*

BOILER AND FACTORY CHIMNEYS.

Their Draught-Power and Stability. With a chapter on *Lightning Conductors.* By ROBERT WILSON, A.I.C.E., Author of "A Treatise on Steam Boilers," &c. Crown 8vo, cloth **3/6**

"A valuable contribution to the literature of scientific building."—*The Builder.*

BOILER MAKER'S READY RECKONER & ASSISTANT.

With Examples of Practical Geometry and Templating, for the Use of Platers, Smiths, and Riveters. By JOHN COURTNEY, Edited by D. K. CLARK, M.I.C.E. Third Edition, 480 pp., with 140 Illustrations. Fcap. 8vo . **7/0**

"No workman or apprentice should be without this book."—*Iron Trade Circular.*

REFRIGERATING & ICE-MAKING MACHINERY.

A Descriptive Treatise for the Use of Persons Employing Refrigerating and Ice-Making Installations, and others. By A. J. WALLIS-TAYLER, A.-M. Inst. C.E. Second Edition, Revised and Enlarged. With Illustrations. Crown 8vo, cloth. [*Just Published.* **7/6**

"Practical, explicit, and profusely illustrated."—*Glasgow Herald.*

"We recommend the book, which gives the cost of various systems and illustrations showing details of parts of machinery and general arrangements of complete installations."—*Builder.*

"May be recommended as a useful description of the machinery, the processes, and of the facts, figures, and tabulated physics of refrigerating. It is one of the best compilations on the subject."—*Engineer.*

TEA MACHINERY AND TEA FACTORIES.

A Descriptive Treatise on the Mechanical Appliances required in the Cultivation of the Tea Plant and the Preparation of Tea for the Market. By A. J. WALLIS-TAYLER, A.-M. Inst. C.E. Medium 8vo, 468 pp. With 218 Illustrations. [*Just Published. Net* **25/0**

SUMMARY OF CONTENTS :—MECHANICAL CULTIVATION OR TILLAGE OF THE SOIL.—PLUCKING OR GATHERING THE LEAF.—TEA FACTORIES.—THE DRESSING, MANUFACTURE OR PREPARATION OF TEA BY MECHANICAL MEANS.—ARTIFICIAL WITHERING OF THE LEAF.—MACHINES FOR ROLLING OR CURLING THE LEAF.—FERMENTING PROCESS.—MACHINES FOR THE AUTOMATIC DRYING OR FIRING OF THE LEAF.—MACHINES FOR NON-AUTOMATIC DRYING OR FIRING OF THE LEAF.—DRYING OR FIRING MACHINES.—BREAKING OR CUTTING, AND SORTING MACHINES.—PACKING THE TEA.—MEANS OF TRANSPORT ON TEA PLANTATIONS.—MISCELLANEOUS MACHINERY AND APPARATUS.—FINAL TREATMENT OF THE TEA.—TABLES AND MEMORANDA.

"The subject of tea machinery is now one of the first interest to a large class of people, to whom we strongly commend the volume."—*Chamber of Commerce Journal.*

"When tea planting was first introduced into the British possessions little, if any, machinery was employed, but now its use is almost universal. This volume contains a very full account of the machinery necessary for the proper outfit of a factory, and also a description of the processes best carried out by this machinery."—*Journal Society of Arts.*

ENGINEERING ESTIMATES, COSTS, AND ACCOUNTS.

A Guide to Commercial Engineering. With numerous examples of Estimates and Costs of Millwright Work, Miscellaneous Productions, Steam Engines and Steam Boilers; and a Section on the Preparation of Costs Accounts. By A GENERAL MANAGER. Second Edition. 8vo, cloth. [*Just Published.* **12/0**

"This is an excellent and very useful book, covering subject-matter in constant requisition in every factory and workshop. . . . The book is invaluable, not only to the young engineer, but also to the estimate department of every works."—*Builder.*

"We accord the work unqualified praise. The information is given in a plain, straightforward manner, and bears throughout evidence of the intimate practical acquaintance of the author with every phase of commercial engineering. —*Mechanical World.*

THE AERIAL OR WIRE-ROPE TRAMWAYS.

Their Construction and Management. By A. J. WALLIS-TAYLER, A.M.Inst.C.E. With 81 Illustrations. Crown 8vo, cloth. [*Just Published.* **7/6**

"This is in its way an excellent volume. Without going into the minutiæ of the subject, it yet lays before its readers a very good exposition of the various systems of rope transmission in use, and gives as well not a little valuable information about their working, repair, and management. We can safely recommend it as a useful general treatise on the subject."—*The Engineer.*

"Mr. Tayler has treated the subject as concisely as thoroughness would permit. The book will rank with the best on this useful topic, and we recommend it to those whose business is the transporting of minerals and goods."—*Mining Journal.*

MOTOR CARS OR POWER-CARRIAGES FOR COMMON ROADS.

By A. J. WALLIS-TAYLER, Assoc. Memb. Inst. C.E., Author of "Modern Cycles," &c. 212 pp., with 76 Illustrations. Crown 8vo, cloth . . **4/6**

"Mr. Wallis-Tayler's book is a welcome addition to the literature of the subject, as it is the production of an Engineer, and has not been written with a view to assist in the promotion of companies. . . . The book is clearly expressed throughout, and is just the sort of work that an engineer, thinking of turning his attention to motor-carriage work, would do well to read as a preliminary to starting operations."—*Engineering.*

PLATING AND BOILER MAKING.

A Practical Handbook for Workshop Operations. By JOSEPH G. HORNER, A.M.I.M.E. 380 pp. with 338 Illustrations. Crown 8vo, cloth . . **7/6**

"The latest production from the pen of this writer is characterised by that evidence of close acquaintance with workshop methods which will render the book exceedingly acceptable to the practical hand. We have no hesitation in commending the work as a serviceable and practical handbook on a subject which has not hitherto received much attention from those qualified to deal with it in a satisfactory manner."—*Mechanical World.*

PATTERN MAKING.

A Practical Treatise, embracing the Main Types of Engineering Construction, and including Gearing, both Hand and Machine-made, Engine Work, Sheaves and Pulleys, Pipes and Columns, Screws, Machine Parts, Pumps and Cocks, the Moulding of Patterns in Loam and Greensand, &c., together with the methods of estimating the weight of Castings; with an Appendix of Tables for Workshop Reference. By JOSEPH G. HORNER, A.M.I.M.E. Second Edition, Enlarged. With 450 Illustrations. Crown 8vo, cloth **7/6**

"A well-written technical guide, evidently written by a man who understands and has practised what he has written about. . . . We cordially recommend it to engineering students, young journeymen, and others desirous of being initiated into the mysteries of pattern-making."—*Builder.*

"An excellent *vade mecum* for the apprentice who desires to become master of his trade."—*English Mechanic.*

MECHANICAL ENGINEERING TERMS

(Lockwood's Dictionary of). Embracing those current in the Drawing Office, Pattern Shop, Foundry, Fitting, Turning, Smiths', and Boiler Shops, &c., &c. Comprising upwards of 6,000 Definitions. Edited by JOSEPH G. HORNER, A.M.I.M.E. Second Edition, Revised, with Additions. Crown 8vo, cloth **7/6**

"Just the sort of handy dictionary required by the various trades engaged in mechanical engineering. The practical engineering pupil will find the book of great value in his studies, and every foreman engineer and mechanic should have a copy."—*Building News.*

TOOTHED GEARING.

A Practical Handbook for Offices and Workshops. By JOSEPH HORNER, A.M.I.M.E. With 184 Illustrations. Crown 8vo, cloth . . . **6/0**

"We must give the book our unqualified praise for its thoroughness of treatment, and we can heartily recommend it to all interested as the most practical book on the subject yet written."—*Mechanical World.*

FIRE PROTECTION.

A Complete Manual of the Organisation, Machinery, Discipline and General Working of the Fire Brigade of London. By CAPTAIN EYRE M. SHAW, C.B., Chief Officer, Metropolitan Fire Brigade New and Revised Edition, Demy 8vo, cloth. . . . . *Net* **5/0**

FIRES, FIRE-ENGINES, AND FIRE BRIGADES.

With a History of Fire-Engines, their Construction, Use, and Management; Foreign Fire Systems; Hints on Fire-Brigades, &c. By CHARLES F. T. YOUNG, C.E. 8vo, cloth . . . . . **£1 4s.**

"To such of our readers as are interested in the subject of fires and fire apparatus we can most heartily commend this book."—*Engineering*

STONE-WORKING MACHINERY.

A Manual dealing with the Rapid and Economical Conversion of Hints on the Arrangement and Management of Stone Works. By M. Powis Bale, M.I.M.E. Second Edition, enlarged. With Illustrations. Crown 8vo, cloth. [*Just Published.* **9/0**

"The book should be in the hands of every mason or student of stonework."—*Colliery Guardian.*

"A capital handbook for all who manipulate stone for building or ornamental purposes."—*Machinery Market.*

PUMPS AND PUMPING.

A Handbook for Pump Users. Being Notes on Selection, Construction, and Management. By M. Powis Bale, M.I.M.E. Fourth Edition. Crown 8vo, cloth. [*Just Published.* **3/6**

"The matter is set forth as concisely as possible. In fact, condensation rather than diffuseness has been the author's aim throughout; yet he does not seem to have omitted anything likely to be of use."—*Journal of Gas Lighting.*

"Thoroughly practical and simply and clearly written."—*Glasgow Herald.*

MILLING MACHINES AND PROCESSES.

A Practical Treatise on Shaping Metals by Rotary Cutters. Including Information on Making and Grinding the Cutters. By Paul N. Hasluck, Author of "Lathe-Work." 352 pp. With upwards of 300 Engravings. Large crown 8vo, cloth **12/6**

"A new departure in engineering literature. . . . We can recommend this work to all interested in milling machines; it is what it professes to be—a practical treatise."—*Engineer.*

"A capital and reliable book which will no doubt be of considerable service both to those who are already acquainted with the process as well as to those who contemplate its adoption."—*Industries.*

LATHE-WORK.

A Practical Treatise on the Tools, Appliances, and Processes employed in the Art of Turning. By Paul N. Hasluck. Seventh Edition. Crown 8vo, cloth. [*Just Published.* **5/0**

"Written by a man who knows not only how work ought to be done, but who also knows how to do it, and how to convey his knowledge to others. To all turners this book would be valuable."—*Engineering.*

"We can safely recommend the work to young engineers. To the amateur it will simply be invaluable. To the student it will convey a great deal of useful information."—*Engineer.*

SCREW-THREADS,

And Methods of Producing Them. With numerous Tables and complete Directions for using Screw-Cutting Lathes. By Paul N. Hasluck, Author of "Lathe-Work," &c. With Seventy-four Illustrations. Fifth Edition. Waistcoat-pocket size **1/6**

"Full of useful information, hints and practical criticism. Taps, dies, and screwing tools generally are illustrated and their actions described."—*Mechanical World.*

"It is a complete compendium of all the details of the screw-cutting lathe; in fact a *multum-in-parvo* on all the subjects it treats upon."—*Carpenter and Builder.*

TABLES AND MEMORANDA FOR ENGINEERS, MECHANICS, ARCHITECTS, BUILDERS, &c.

Selected and Arranged by Francis Smith. Sixth Edition, Revised, including Electrical Tables, Formulæ, and Memoranda. Waistcoat-pocket size, limp leather. [*Just Published.* **1/6**

"It would, perhaps, be as difficult to make a small pocket-book selection of notes and formulæ to suit ALL engineers as it would be to make a universal medicine; but Mr. Smith's waistcoat-pocket collection may be looked upon as a successful attempt."—*Engineer.*

"The best example we have ever seen of 270 pages of useful matter packed into the dimensions of a card-case."—*Building News.* "A veritable pocket treasury of knowledge."—*Iron.*

POCKET GLOSSARY OF TECHNICAL TERMS.

English-French, French-English; with Tables suitable for the Architectural, Engineering, Manufacturing, and Nautical Professions. By John James Fletcher, Engineer and Surveyor. Third Edition, 200 pp. Waistcoat-pocket size, limp leather. [*Just Published.* **1/6**

"It is a very great advantage for readers and correspondents in France and England to have so large a number of the words relating to engineering and manufacturers collected in a lilliputian volume. The little book will be useful both to students and travellers."—*Architect.*

"The glossary of terms is very complete, and many of the Tables are new and well arranged. We cordially commend the book."—*Mechanical World.*

THE ENGINEER'S YEAR BOOK FOR 1901.

Comprising Formulæ, Rules, Tables, Data and Memoranda in Civil, Mechanical, Electrical, Marine and Mine Engineering. By H. R. KEMPE, A.M. Inst. C.E., M.I.E.E., Technical Officer of the Engineer-in-Chief's Office, General Post Office, London, Author of "A Handbook of Electrical Testing," "The Electrical Engineer's Pocket-Book," &c. With about 1,000 Illustrations, specially Engraved for the work. Crown 8vo, 800 pp., leather. [*Just Published.* **8/0**

"Represents an enormous quantity of work, and forms a desirable book of reference."—*The Engineer.*

"The volume is distinctly in advance of most similar publications in this country."—*Engineering.*

"This valuable and well-designed book of reference meets the demands of all descriptions of engineers."—*Saturday Review.*

"Teems with up-to-date information in every branch of engineering and construction."—*Building News.*

"The needs of the engineering profession could hardly be supplied in a more admirable, complete and convenient form. To say that it more than sustains all comparisons is praise of the highest sort, and that may justly be said of it."—*Mining Journal.*

"There is certainly room for the newcomer, which supplies explanations and directions, as well as formulæ and tables. It deserves to become one of the most successful of the technical annuals."—*Architect.*

"Brings together with great skill all the technical information which an engineer has to use day by day. It is in every way admirably equipped, and is sure to prove successful."—*Scotsman.*

"The up-to-dateness of Mr. Kempe's compilation is a quality that will not be lost on the busy people for whom the work is intended."—*Glasgow Herald.*

THE PORTABLE ENGINE.

A Practical Manual on its Construction and Management. For the use of Owners and Users of Steam Engines generally. By WILLIAM DYSON WANSBROUGH. Crown 8vo, cloth **3/6**

"This is a work of value to those who use steam machinery. . . . Should be read by every one who has a steam engine, on a farm or elsewhere."—*Mark Lane Express.*

"We cordially commend this work to buyers and owners of steam-engines, and to those who have to do with their construction or use."—*Timber Trades Journal.*

"Such a general knowledge of the steam-engine as Mr. Wansbrough furnishes to the reader should be acquired by all intelligent owners and others who use the steam-engine."—*Building News.*

"An excellent text-book of this useful form of engine. The 'Hints to Purchasers' contain a good deal of common-sense and practical wisdom."—*English Mechanic.*

IRON AND STEEL.

A Work for the Forge, Foundry, Factory, and Office. Containing ready, useful, and trustworthy Information for Ironmasters and their Stock-takers; Managers of Bar, Rail, Plate, and Sheet Rolling Mills; Iron and Metal Founders; Iron Ship and Bridge Builders; Mechanical, Mining, and Consulting Engineers; Architects, Contractors, Builders, &c. By CHARLES HOARE, Author of "The Slide Rule," &c. Ninth Edition. 32mo, leather . **6/0**

"For comprehensiveness the book has not its equal."—*Iron.*

"One of the best of the pocket books."—*English Mechanic.*

CONDENSED MECHANICS.

A Selection of Formulæ, Rules, Tables, and Data for the Use of Engineering Students, Science Classes, &c. In accordance with the Requirements of the Science and Art Department. By W. G. CRAWFORD HUGHES, A.M.I.C.E. Crown 8vo, cloth **2/6**

"The book is well fitted for those who are either confronted with practical problems in their work, or are preparing for examination and wish to refresh their knowledge by going through their formulæ again."—*Marine Engineer.*

"It is well arranged, and meets the wants of those for whom it is intended."—*Railway News.*

THE SAFE USE OF STEAM.

Containing Rules for Unprofessional Steam Users. By an ENGINEER. Seventh Edition. Sewed . . . . . **6D.**

"If steam-users would but learn this little book by heart, boiler explosions would become sensations by their rarity."—*English Mechanic.*

THE LOCOMOTIVE ENGINE.

The Autobiography of an Old Locomotive Engine. By ROBERT WEATHERBURN, M.I.M.E. With Illustrations and Portraits of GEORGE and ROBERT STEPHENSON. Crown 8vo, cloth. [*Just Published. Net* **2/6**

SUMMARY OF CONTENTS:—PROLOGUE.—CYLINDERS.—MOTIONS.—CONNECTING RODS.—FRAMES.—WHEELS.—PUMPS, CLACKS, &c.—INJECTORS.—BOILERS.—SMOKE BOX.—CHIMNEY.—WEATHER BOARD AND AWNING.—INTERNAL DISSENSIONS.—ENGINE DRIVERS, &c.

"It would be difficult to imagine anything more ingeniously planned, more cleverly worked out, and more charmingly written. Readers cannot fail to find the volume most enjoyable."—*Glasgow Herald.*

THE LOCOMOTIVE ENGINE AND ITS DEVELOPMENT.

A Popular Treatise on the Gradual Improvements made in Railway Engines between 1803 and 1896. By CLEMENT E. STRETTON, C.E. Fifth Edition, Enlarged. With 120 Illustrations. Crown 8vo, cloth. [*Just Published.* **3/6**

"Students of railway history and all who are interested in the evolution of the modern ocomotive will find much to attract and entertain in this volume."—*The Times.*

LOCOMOTIVE ENGINE DRIVING.

A Practical Manual for Engineers in Charge of Locomotive Engines. By MICHAEL REYNOLDS, Member of the Society of Engineers, formerly Locomotive Inspector, L. B. & S. C. R. Ninth Edition. Including a KEY TO THE LOCOMOTIVE ENGINE. Crown 8vo, cloth **4/6**

"Mr. Reynolds has supplied a want, and has supplied it well. We can confidently recommend the book not only to the practical driver, but to everyone who takes an interest in the performance of locomotive engines."—*The Engineer.*

"Mr. Reynolds has opened a new chapter in the literature of the day. His treatise is admirable."—*Athenæum.*

THE MODEL LOCOMOTIVE ENGINEER,

Fireman, and Engine-Boy. Comprising a Historical Notice of the Pioneer Locomotive Engines and their Inventors. By MICHAEL REYNOLDS. Second Edition, with Revised Appendix. Crown 8vo, cloth. [*Just Published.* **4/6**

"From the technical knowledge of the author, it will appeal to the railway man of to-day more forcibly than anything written by Dr. Smiles. . . . The volume contains information of a technical kind, and facts that every driver should be familiar with."—*English Mechanic.*

"We should be glad to see this book in the possession of everyone in the kingdom who has ever laid, or is to lay, hands on a locomotive engine."—*Iron.*

CONTINUOUS RAILWAY BRAKES.

A Practical Treatise on the several Systems in Use in the United Kingdom: their Construction and Performance. With copious Illustrations and numerous Tables. By MICHAEL REYNOLDS. 8vo, cloth **9/0**

"A popular explanation of the different brakes. It will be of great assistance in forming public opinion, and will be studied with benefit by those who take an interest in the brake."—*English Mechanic*

STATIONARY ENGINE DRIVING.

A Practical Manual for Engineers in Charge of Stationary Engines. By MICHAEL REYNOLDS. Sixth Edition. Crown 8vo, cloth . . . **4/6**

"The author is thoroughly acquainted with his subjects, and his advice on the various points treated is clear and practical. . . . He has produced a manual which is an exceedingly useful one for the class for whom it is specially intended."—*Engineering.*

"Our author leaves no stone unturned. He is determined that his readers shall not only know something about the stationary engine, but all about it."—*Engineer.*

ENGINE-DRIVING LIFE.

Stirring Adventure and Incidents in the Lives of Locomotive Engine-Drivers. By MICHAEL REYNOLDS. Third Edition. Crown 8vo, cloth . **1/6**

"Perfectly fascinating. Wilkie Collins's most thrilling conceptions are thrown into the shade by true incidents, endless in their variety, related in every page."—*North British Mail.*

THE ENGINEMAN'S POCKET COMPANION,

And Practical Educator for Enginemen, Boiler Attendants, and Mechanics. By MICHAEL REYNOLDS. With 45 Illustrations and numerous Diagrams. Fourth Edition, Revised. Royal 18mo, strongly bound for pocket wear **3/6**

"This admirable work is well suited to accomplish its object, being the honest workmanship of a competent engineer."—*Glasgow Herald.*

CIVIL ENGINEERING, SURVEYING, &c.

LIGHT RAILWAYS FOR THE UNITED KINGDOM, INDIA, AND THE COLONIES.

A Practical Handbook setting forth the Principles on which Light Railways should be Constructed, Worked, and Financed; and detailing the Cost of Construction, Equipment, Revenue and Working Expenses of Local Railways already established in the above-mentioned countries, and in Belgium, France, Switzerland, &c. By J. C. MACKAY, F.G.S., A.M. Inst. C.E. Illustrated with Plates and Diagrams. Medium 8vo, cloth. [*Just Published.* **15/0**

"Mr. Mackay's volume is clearly and concisely written, admirably arranged, and freely illustrated. The book is exactly what has been long wanted. We recommend it to all interested in the subject. It is sure to have a wide sale."—*Railway News.*

TUNNELLING.

A Practical Treatise. By CHARLES PRELINI, C E. With additions by CHARLES S. HILL, C.E. Including 150 Diagrams and Illustrations. Royal 8vo, cloth. [*Just Published. Net* **16/0**

PRACTICAL TUNNELLING.

Explaining in detail Setting-out the Works, Shaft-sinking, and Heading-driving, Ranging the Lines and Levelling underground, Sub-Excavating, Timbering and the Construction of the Brickwork of Tunnels, with the amount of Labour required for, and the Cost of, the various portions of the work. By FREDERICK W. SIMMS, M. Inst. C.E. Fourth Edition, Revised and Further Extended, including the most recent (1895) Examples of Sub-aqueous and other Tunnels, by D. KINNEAR CLARK, M. Inst. C.E. Imperial 8vo, with 34 Folding Plates and other Illustrations. Cloth. [*Just Published.* **£2 2s.**

"The present (1896) edition has been brought right up to date, and is thus rendered a work to which civil engineers generally should have ready access, and to which engineers who have construction work can hardly afford to be without, but which to the younger members of the profession is invaluable, as from its pages they can learn the state to which the science of tunnelling has attained."—*Railway News.*

"The estimation in which Mr. Simms's book has been held for many years cannot be more truly expressed than in the words of the late Prof. Rankine: 'The best source of information on the subject of tunnels is Mr. F. W. Simms's work on Practical Tunnelling.'"—*Architect.*

THE WATER SUPPLY OF TOWNS AND THE CONSTRUCTION OF WATER-WORKS.

A Practical Treatise for the Use of Engineers and Students of Engineering. By W. K. BURTON, A.M. Inst. C.E., Professor of Sanitary Engineering in the Imperial University, Tokyo, Japan, and Consulting Engineer to the Tokyo Water-works. Second Edition, Revised and Extended. With numerous Plates and Illustrations. Super-royal 8vo, buckram. [*Just Published.* **25/0**

I. INTRODUCTORY.—II. DIFFERENT QUALITIES OF WATER.—III. QUANTITY OF WATER TO BE PROVIDED.—IV. ON ASCERTAINING WHETHER A PROPOSED SOURCE OF SUPPLY IS SUFFICIENT.—V. ON ESTIMATING THE STORAGE CAPACITY REQUIRED TO BE PROVIDED.—VI. CLASSIFICATION OF WATER-WORKS.—VII. IMPOUNDING RESERVOIRS.—VIII. EARTHWORK DAMS.—IX. MASONRY DAMS.—X. THE PURIFICATION OF WATER.—XI. SETTLING RESERVOIRS.—XII. SAND FILTRATION.—XIII. PURIFICATION OF WATER BY ACTION OF IRON, SOFTENING OF WATER BY ACTION OF LIME, NATURAL FILTRATION.—XIV. SERVICE OR CLEAN WATER RESERVOIRS—WATER TOWERS—STAND PIPES.—XV. THE CONNECTION OF SETTLING RESERVOIRS, FILTER BEDS AND SERVICE RESERVOIRS.—XVI. PUMPING MACHINERY.—XVII. FLOW OF WATER IN CONDUITS—PIPES AND OPEN CHANNELS.—XVIII. DISTRIBUTION SYSTEMS.—XIX. SPECIAL PROVISIONS FOR THE EXTINCTION OF FIRE.—XX. PIPES FOR WATER-WORKS.—XXI. PREVENTION OF WASTE OF WATER.—XXII. VARIOUS APPLICATIONS USED IN CONNECTION WITH WATER-WORKS.

APPENDIX I. By PROF. JOHN MILNE, F.R.S.—CONSIDERATIONS CONCERNING THE PROBABLE EFFECTS OF EARTHQUAKES ON WATER-WORKS, AND THE SPECIAL PRECAUTIONS TO BE TAKEN IN EARTHQUAKE COUNTRIES.

APPENDIX II. By JOHN DE RIJKE, C.E.—ON SAND DUNES AND DUNE SAND AS A SOURCE OF WATER SUPPLY.

"The chapter upon filtration of water is very complete, and the details of construction well illustrated. . . . The work should be specially valuable to civil engineers engaged in work in Japan, but the interest is by no means confined to that locality."—*Engineer.*

"We congratulate the author upon the practical commonsense shown in the preparation of this work. . . . The plates and diagrams have evidently been prepared with great care, and cannot fail to be of great assistance to the student."—*Builder.*

"The whole art of water-works construction is dealt with in a clear and comprehensive fashion in this handsome volume. . . . Mr. Burton's practical treatise shows in all its sections the fruit of independent study and individual experience. It is largely based upon his own practice in the branch of engineering of which it treats."—*Saturday Review.*

THE WATER SUPPLY OF CITIES AND TOWNS.

By WILLIAM HUMBER, A. M. Inst. C.E., and M. Inst M.E., Author of "Cast and Wrought Iron Bridge Construction," &c., &c. Illustrated with 50 Double Plates, 1 Single Plate, Coloured Frontispiece, and upwards of 250 Woodcuts, and containing 400 pp. of Text. Imp. 4to, elegantly and substantially half-bound in morocco . . . . . *Net* **£6 6s.**

LIST OF CONTENTS.

I. HISTORICAL SKETCH OF SOME OF THE MEANS THAT HAVE BEEN ADOPTED FOR THE SUPPLY OF WATER TO CITIES AND TOWNS.—II. WATER AND THE FOREIGN MATTER USUALLY ASSOCIATED WITH IT.—III. RAINFALL AND EVAPORATION.—IV. SPRINGS AND THE WATER-BEARING FORMATIONS OF VARIOUS DISTRICTS.—V. MEASUREMENT AND ESTIMATION OF THE FLOW OF WATER.—VI. ON THE SELECTION OF THE SOURCE OF SUPPLY.—VII. WELLS.—VIII. RESERVOIRS.—IX. THE PURIFICATION OF WATER.—X. PUMPS.—XI. PUMPING MACHINERY.—XII. CONDUITS.—XIII. DISTRIBUTION OF WATER.—XIV. METERS, SERVICE PIPES, AND HOUSE FITTINGS.—XV. THE LAW OF ECONOMY OF WATER-WORKS.—XVI. CONSTANT AND INTERMITTENT SUPPLY.—XVII. DESCRIPTION OF PLATES.—APPENDICES, GIVING TABLES OF RATES OF SUPPLY, VELOCITIES, &c., &c., TOGETHER WITH SPECIFICATIONS OF SEVERAL WORKS ILLUSTRATED, AMONG WHICH WILL BE FOUND: ABERDEEN, BIDEFORD, CANTERBURY, DUNDEE, HALIFAX, LAMBETH, ROTHERHAM, DUBLIN, AND OTHERS.

"The most systematic and valuable work upon water supply hitherto produced in English, or in any other language. It is characterised almost throughout by an exhaustiveness much more distinctive of French and German than of English technical treatises."—*Engineer.*

RURAL WATER SUPPLY.

A Practical Handbook on the Supply of Water and Construction of Water-works for small Country Districts. By ALLAN GREENWELL, A.M.I.C.E., and W. T. CURRY, A.M.I.C.E., F.G.S. With Illustrations. Second Edition, Revised. Crown 8vo, cloth. [*Just Published.* **5/0**

"We conscientiously recommend it as a very useful book for those concerned in obtaining water for small districts, giving a great deal of practical information in a small compass."—*Builder.*

"The volume contains valuable information upon all matters connected with water supply. . . . Full of details on points which are continually before water-works engineers."—*Nature.*

HYDRAULIC POWER ENGINEERING.

A Practical Manual on the Concentration and Transmission of Power by Hydraulic Machinery. By G. CROYDON MARKS, A.M. Inst. C.E. With nearly 200 Illustrations. 8vo, cloth. [*Just Published. Net* **9/0**

SUMMARY OF CONTENTS:—PRINCIPLES OF HYDRAULICS.—THE OBSERVED FLOW OF WATER.—HYDRAULIC PRESSURES, MATERIAL.—TEST LOAD PACKINGS FOR SLIDING SURFACES.—PIPE JOINTS.—CONTROLLING VALVES.—PLATFORM LIFTS.—WORKSHOP, FACTORY, AND DOCK CRANES.—HYDRAULIC ACCUMULATORS.—PRESSES.—SHEET METAL WORKING AND FORGING MACHINERY.—HYDRAULIC RIVETTERS.—HAND, POWER, AND STEAM PUMPS.—TURBINES.—IMPULSE AND RE-ACTION TURBINES.—DESIGN OF TURBINES.—WATER WHEELS.—HYDRAULIC ENGINES.—RECENT ACHIEVEMENTS.—TABLES.

"We have nothing but praise for this thoroughly valuable work. The author has succeeded in rendering his subject interesting as well as instructive."—*Practical Engineer.*

"Can be unhesitatingly recommended as a useful and up-to-date manua on hydraulic transmission and utilisation of power."—*Mechanical World.*

HYDRAULIC TABLES, CO-EFFICIENTS, & FORMULÆ.

For Finding the Discharge of Water from Orifices, Notches, Weirs, Pipes, and Rivers. With New Formulæ, Tables, and General Information on Rain-fall, Catchment-Basins, Drainage, Sewerage, Water Supply for Towns and Mill Power. By JOHN NEVILLE, Civil Engineer, M.R.I.A. Third Edition, revised, with additions. Numerous Illustrations. Crown 8vo, cloth . **14/0**

"It is, of all English books on the subject, the one nearest to completeness."—*Architect.*

HYDRAULIC MANUAL.

Consisting of Working Tables and Explanatory Text. Intended as a Guide in Hydraulic Calculations and Field Operations. By LOWIS D'A. JACKSON, Author of "Aid to Survey Practice," "Modern Metrology," &c. Fourth Edition, Enlarged. Large crown 8vo, cloth **16/0**

"The author has constructed a manual which may be accepted as a trustworthy guide to this branch of the engineer's profession."—*Engineering.*

WATER ENGINEERING.

A Practical Treatise on the Measurement, Storage, Conveyance, and Utilisation of Water for the Supply of Towns, for Mill Power, and for other Purposes. By C. SLAGG, A. M. Inst. C.E. Second Edition. Crown 8vo, cloth . **7/6**

"As a small practical treatise on the water supply of towns, and on some applications of water-power, the work is in many respects excellent."—*Engineering.*

THE RECLAMATION OF LAND FROM TIDAL WATERS.

A Handbook for Engineers, Landed Proprietors, and others interested in Works of Reclamation. By ALEXANDER BEAZELEY, M.Inst. C.E. With Illustrations. 8vo, cloth. [*Just Published. Net* **10/6**

"The book shows in a concise way what has to be done in reclaiming land from the sea, and the best way of doing it. The work contains a great deal of practical and useful information which cannot fail to be of service to engineers entrusted with the enclosure of salt marshes, and to landowners intending to reclaim land from the sea."—*The Engineer.*

"The author has carried out his task efficiently and well, and his book contains a large amount of information of great service to engineers and others interested in works of reclamation."—*Nature.*

MASONRY DAMS FROM INCEPTION TO COMPLETION.

Including numerous Formulæ, Forms of Specification and Tender, Pocket Diagram of Forces, &c. For the use of Civil and Mining Engineers. By C. F. COURTNEY, M. Inst. C.E. 8vo, cloth. [*Just Published.* **9/0**

"The volume contains a good deal of valuable data, and furnishes the engineer with practical advice. The author deals with his subject from the inception to the finish. Many useful suggestions will be found in the remarks on site and position, location of dam, foundations and construction."—*Building News.*

RIVER BARS.

The Causes of their Formation, and their Treatment by "Induced Tidal Scour"; with a Description of the Successful Reduction by this Method of the Bar at Dublin. By I. J. MANN, Assist. Eng. to the Dublin Port and Docks Board. Royal 8vo, cloth **7/6**

"We recommend all interested in harbour works—and, indeed, those concerned in the mprovements of rivers generally—to read Mr. Mann's interesting work."—*Engineer.*

TRAMWAYS: THEIR CONSTRUCTION AND WORKING.

Embracing a Comprehensive History of the System; with an exhaustive Analysis of the Various Modes of Traction, including Horse Power, Steam, Cable Traction, Electric Traction, &c.; a Description of the Varieties of Rolling Stock; and ample Details of Cost and Working Expenses. New Edition, Thoroughly Revised, and Including the Progress recently made in Tramway Construction, &c., &c. By D. KINNEAR CLARK, M. Inst. C.E. With 400 Illustrations. 8vo, 780 pp., buckram. [*Just Published.* **28/0**

"The new volume is one which will rank, among tramway engineers and those interested in tramway working, with the Author's world-famed book on railway machinery."—*The Engineer*

PRACTICAL SURVEYING.

A Text-Book for Students preparing for Examinations or for Survey-work in the Colonies. By GEORGE W. USILL, A.M.I.C.E. With 4 Plates and upwards of 330 Illustrations. Sixth Edition. Including Tables of Natural Sines, Tangents, Secants, &c. Crown 8vo, cloth **7/6**; or, on THIN PAPER, leather, gilt edges, for pocket use. **12/6**

"The best forms of instruments are described as to their construction, uses and modes of employment, and there are innumerable hints on work and equipment such as the author, in his experience as surveyor, draughtsman and teacher, has found necessary, and which the student in his inexperience will find most serviceable."—*Engineer.*

"The latest treatise in the English language on surveying, and we have no hesitation in saying that the student will find it a better guide than any of its predecessors. Deserves to be recognised as the first book which should be put in the hands of a pupil of Civil Engineering."—*Architect.*

SURVEYING WITH THE TACHEOMETER.

A practica Manual for the use of Civil and Military Engineers and Surveyors. Including two series of Tables specially computed for the Reduction of Readings in Sexagesimal and in Centesimal Degrees. By NEIL KENNEDY, M. Inst. C.E. With Diagrams and Plates. Demy 8vo, cloth. [*Just Published. Net* **10/6**

"The work is very clearly written, and should remove all difficulties in the way of any surveyor desirous of making use of this useful and rapid instrument."—*Nature.*

AID TO SURVEY PRACTICE.

For Reference in Surveying, Levelling, and Setting-out; and in Route Surveys of Travellers by Land and Sea. With Tables, Illustrations, and Records. By LOWIS D'A. JACKSON, A.M.I.C.E. 8vo, cloth **12/6**

"A valuable *vade-mecum* for the surveyor. We recommend this book as containing an admirable supplement to the teaching of the accomplished surveyor."—*Athenæum.*

"The author brings to his work a fortunate union of theory and practical experience which, aided by a clear and lucid style of writing, renders the book a very useful one."—*Builder.*

ENGINEER'S & MINING SURVEYOR'S FIELD BOOK.

Consisting of a Series of Tables, with Rules, Explanations of Systems, and use of Theodolite for Traverse Surveying and plotting the work with minute accuracy by means of Straight Edge and Set Square only; Levelling with the Theodolite, Casting-out and Reducing Levels to Datum, and Plotting Sections in the ordinary manner; Setting-out Curves with the Theodolite by Tangential Angles and Multiples with Right and Left-hand Readings of the Instrument; Setting-out Curves without Theodolite on the System of Tangential Angles by Sets of Tangents and Offsets; and Earthwork Tables to 80 feet deep, calculated for every 6 inches in depth. By W. DAVIS HASKOLL, C.E. With numerous Woodcuts. Fourth Edition, Enlarged. Crown 8vo, cloth . **12/0**

"The book is very handy; the separate tables of sines and tangents to every minute will make it useful for many other purposes, the genuine traverse tables existing all the same."—*Athenæum.*

"Every person engaged in engineering field operations will estimate the importance of such a work and the amount of valuable time which will be saved by reference to a set of reliable tables prepared with the accuracy and fulness of those given in this volume."—*Railway News.*

LAND AND MARINE SURVEYING.

In Reference to the Preparation of Plans for Roads and Railways; Canals, Rivers, Towns' Water Supplies; Docks and Harbours. With Description and Use of Surveying Instruments. By W. DAVIS HASKOLL, C.E. Second Edition, Revised, with Additions. Large crown 8vo, cloth **9/0**

"This book must prove of great value to the student. We have no hesitation in recommending it, feeling assured that it will more than repay a careful study."—*Mechanical World.*

"A most useful book for the student. We strongly recommend it as a carefully-written and valuable text-book. It enjoys a well-deserved repute among surveyors."—*Builder.*

"This volume cannot fail to prove of the utmost practical utility. It may be safely recommended to all students who aspire to become clean and expert surveyors."—*Mining Journal.*

PRINCIPLES AND PRACTICE OF LEVELLING.

Showing its Application to Purposes of Railway and Civil Engineering in the Construction of Roads; with Mr. TELFORD'S Rules for the same. By FREDERICK W. SIMMS, F.G.S., M. Inst. C.E. Eighth Edition, with the addition of LAW'S Practical Examples for Setting-out Railway Curves, and TRAUTWINE'S Field Practice of Laying-out Circular Curves. With 7 Plates and numerous Woodcuts, 8vo, cloth **8/6**

*** TRAUTWINE on CURVES may be had separate **5/0**

"The text-book on levelling in most of our engineering schools and colleges."—*Engineer.*

"The publishers have rendered a substantial service to the profession, especially to the younger members, by bringing out the present edition of Mr. Simms's useful work."—*Engineering.*

AN OUTLINE OF THE METHOD OF CONDUCTING A TRIGONOMETRICAL SURVEY.

For the Formation of Geographical and Topographical Maps and Plans, Military Reconnaissance, LEVELLING, &c., with Useful Problems, Formulæ, and Tables. By Lieut.-General FROME, R.E. Fourth Edition, Revised and partly Re-written by Major-General Sir CHARLES WARREN, G.C.M.G., R.E. With 19 Plates and 115 Woodcuts, royal 8vo, cloth **16/0**

"No words of praise from us can strengthen the position so well and so steadily maintained by this work. Sir Charles Warren has revised the entire work, and made such additions as were necessary to bring every portion of the contents up to the present date."—*Broad Arrow.*

TABLES OF TANGENTIAL ANGLES AND MULTIPLES FOR SETTING-OUT CURVES.

From 5 to 200 Radius. By A. BEAZELEY, M. Inst. C.E. 6th Edition, Revised. With an Appendix on the use of the Tables for Measuring up Curves. Printed on 50 Cards, and sold in a cloth box, waistcoat-pocket size. [*Just Published.* **3/6**

"Each table is printed on a card, which, placed on the theodolite, leaves the hands free to manipulate the instrument—no small advantage as regards the rapidity of work."—*Engineer.*

"Very handy: a man may know that all his day's work must fall on two of these cards, which he puts into his own card-case, and leaves the rest behind."—*Athenæum.*

HANDY GENERAL EARTH-WORK TABLES.

Giving the Contents in Cubic Yards of Centre and Slopes of Cuttings and Embankments from 3 inches to 80 feet in Depth or Height, for use with either 66 feet Chain or 100 feet Chain. By J. H. WATSON BUCK, M. Inst. C.E. On a Sheet mounted in cloth case. [*Just Published.* **3/6**

EARTHWORK TABLES.

Showing the Contents in Cubic Yards of Embankments, Cuttings, &c., of Heights or Depths up to an average of 80 feet. By JOSEPH BROADBENT, C.E., and FRANCIS CAMPIN, C.E. Crown 8vo, cloth **5/0**

"The way in which accuracy is attained, by a simple division of each cross section into three elements, two in which are constant and one variable, is ingenious."—*Athenæum.*

A MANUAL ON EARTHWORK.

By ALEX. J. S. GRAHAM, C.E. With numerous Diagrams. Second Edition. 18mo, cloth **2/6**

THE CONSTRUCTION OF LARGE TUNNEL SHAFTS.

A Practical and Theoretical Essay. By J. H. WATSON BUCK, M. Inst. C.E., Resident Engineer, L. and N. W. R. With Folding Plates, 8vo, cloth **12/0**

"Many of the methods given are of extreme practical value to the mason, and the observations on the form of arch, the rules for ordering the stone, and the construction of the templates, will be found of considerable use. We commend the book to the engineering profession."—*Building News.*

"Will be regarded by civil engineers as of the utmost value, and calculated to save much time and obviate many mistakes."—*Colliery Guardian.*

CAST & WROUGHT IRON BRIDGE CONSTRUCTION

(A Complete and Practical Treatise on), including Iron Foundations. In Three Parts.—Theoretical, Practical, and Descriptive. By WILLIAM HUMBER, A. M. Inst. C.E., and M. Inst. M.E. Third Edition, revised and much improved, with 115 Double Plates (20 of which now first appear in this edition), and numerous Additions to the Text. In 2 vols., imp. 4to, half-bound in morocco . . . . . **£6 16s. 6d.**

"A very valuable contribution to the standard literature of civil engineering. In addition to elevations, plans, and sections, large scale details are given, which very much enhance the instructive worth of those illustrations."—*Civil Engineer and Architect's Journal.*

"Mr. Humber's stately volumes, lately issued—in which the most important bridges erected during the last five years, under the direction of the late Mr. Brunel, Sir W. Cubitt, Mr. Hawkshaw, Mr. Page, Mr. Fowler, Mr. Hemans, and others among our most eminent engineers, are drawn and specified in great detail."—*Engineer.*

ESSAY ON OBLIQUE BRIDGES

(Practical and Theoretical). With 13 large Plates. By the late GEORGE WATSON BUCK, M.I.C.E. Fourth Edition, revised by his Son, J. H. WATSON BUCK, M.I.C.E.; and with the addition of Description to Diagrams for Facilitating the Construction of Oblique Bridges, by W. H. BARLOW, M.I.C.E. Royal 8vo, cloth **12/0**

"The standard text-book for all engineers regarding skew arches is Mr. Buck's treatise, and it would be impossible to consult a better."—*Engineer.*

"Mr. Buck's treatise is recognised as a standard text-book, and his treatment has divested the subject of many of the intricacies supposed to belong to it. As a guide to the engineer and architect, on a confessedly difficult subject, Mr. Buck's work is unsurpassed."—*Building News.*

THE CONSTRUCTION OF OBLIQUE ARCHES

(A Practical Treatise on). By JOHN HART. Third Edition, with Plates. Imperial 8vo, cloth **8/0**

GRAPHIC AND ANALYTIC STATICS.

In their Practical Application to the Treatment of Stresses in Roofs, Solid Girders, Lattice, Bowstring, and Suspension Bridges, Braced Iron Arches and Piers, and other Frameworks. By R. HUDSON GRAHAM, C.E. Containing Diagrams and Plates to Scale. With numerous Examples, many taken from existing Structures. Specially arranged for Class-work in Colleges and Universities. Second Edition, Revised and Enlarged. 8vo, cloth . **16/0**

"Mr. Graham's book will find a place wherever graphic and analytic statics are used or studied."—*Engineer.*

"The work is excellent from a practical point of view, and has evidently been prepared with much care. The directions for working are simple, and are illustrated by an abundance of well-selected examples. It is an excellent text-book for the practical draughtsman."—*Athenæum.*

WEIGHTS OF WROUGHT IRON & STEEL GIRDERS.

A Graphic Table for Facilitating the Computation of the Weights of Wrought Iron and Steel Girders, &c., for Parliamentary and other Estimates. By J. H. WATSON BUCK, M. Inst. C.E. On a Sheet **2/6**

PRACTICAL GEOMETRY.

For the Architect, Engineer, and Mechanic. Giving Rules for the Delineation and Application of various Geometrical Lines, Figures, and Curves. By E. W. TARN, M.A., Architect. 8vo, cloth **9/0**

"No book with the same objects in view has ever been published in which the clearness of the rules laid down and the illustrative diagrams have been so satisfactory."—*Scotsman.*

THE GEOMETRY OF COMPASSES.

Or, Problems Resolved by the mere Description of Circles and the Use of Coloured Diagrams and Symbols. By OLIVER BYRNE. Coloured Plates. Crown 8vo, cloth **3/6**

HANDY BOOK FOR THE CALCULATION OF STRAINS

In Girders and Similar Structures and their Strength. Consisting of Formulæ and Corresponding Diagrams, with numerous details for Practical Application, &c. By WILLIAM HUMBER, A. M. Inst. C.E., &c. Fifth Edition. Crown 8vo, with nearly 100 Woodcuts and 3 Plates, cloth . . . **7/6**

"The formulæ are neatly expressed, and the diagrams good."—*Athenæum.*

"We heartily commend this really *handy* book to our engineer and architect readers."—*English Mechanic.*

TRUSSES OF WOOD AND IRON.

Practical Applications of Science in Determining the Stresses, Breaking Weights, Safe Loads, Scantlings, and Details of Construction. With Complete Working Drawings. By WILLIAM GRIFFITHS, Surveyor. 8vo, cloth. **4/6**

"This handy little book enters so minutely into every detail connected with the construction of roof trusses that no student need be ignorant of these matters."—*Practical Engineer.*

THE STRAINS ON STRUCTURES OF IRONWORK.

With Practical Remarks on Iron Construction. By F. W. SHEILDS, M.I.C.E. 8vo, cloth **5/0**

A TREATISE ON THE STRENGTH OF MATERIALS.

With Rules for Application in Architecture, the Construction of Suspension Bridges, Railways, &c. By PETER BARLOW, F.R.S. A new Edition, revised by his Sons, P. W. BARLOW, F.R.S., and W. H. BARLOW, F.R.S.; to which are added, Experiments by HODGKINSON, FAIRBAIRN, and KIRKALDY; and Formulæ for calculating Girders, &c. Arranged and Edited by WM. HUMBER, A. M. Inst. C.E. 8vo, cloth **18/0**

"Valuable alike to the student tyro, and the experienced practitioner, it will always rank in future as it has hitherto done, as the standard treatise on that particular subject."—*Engineer.*

"As a scientific work of the first class, it deserves a foremost place on the bookshelves of every civil engineer and practical mechanic."—*English Mechanic.*

SAFE RAILWAY WORKING.

A Treatise on Railway Accidents, their Cause and Prevention; with a Description of Modern Appliances and Systems. By CLEMENT E. STRETTON, C.E., Vice-President and Consulting Engineer, Amalgamated Society of Railway Servants. With Illustrations and Coloured Plates. Third Edition, Enlarged. Crown 8vo, cloth **3/6**

"A book for the engineer, the directors, the managers; and, in short, all who wish for information on railway matters will find a perfect encyclopædia in 'Safe Railway Working.'"—*Railway Review.*

"We commend the remarks on railway signalling to all railway managers, especially where a uniform code and practice is advocated."—*Herepath's Railway Journal.*

EXPANSION OF STRUCTURES BY HEAT.

By JOHN KEILY, C.E., late of the Indian Public Works Department. Crown 8vo, cloth **3/6**

"The aim the author has set before him, viz., to show the effects of heat upon metallic and other structures, is a laudable one, for this is a branch of physics upon which the engineer or architect can find but little reliable and comprehensive data in books."—*Builder.*

THE PROGRESS OF MODERN ENGINEERING.

Complete in Four Volumes, imperial 4to, half-morocco, price **£12 12s.**
Each volume sold separately, as follows:—

FIRST SERIES, Comprising Civil, Mechanical, Marine, Hydraulic, Railway, Bridge, and other Engineering Works, &c. By WILLIAM HUMBER, A. M. Inst. C.E., &c. Imp. 4to, with 36 Double Plates, drawn to a large scale, Photographic Portrait of John Hawkshaw, C.E., F.R.S., &c., and copious descriptive Letterpress, Specifications, &c. Half-morocco . . **£3 3s.**

LIST OF THE PLATES AND DIAGRAMS.

VICTORIA STATION AND ROOF, L. B. & S. C. R. (8 PLATES); SOUTHPORT PIER (2 PLATES); VICTORIA STATION AND ROOF, L. C. & D. AND G. W. R. (6 PLATES); ROOF OF CREMORNE MUSIC HALL; BRIDGE OVER G. N. RAILWAY; ROOF OF STATION, DUTCH RHENISH RAIL. (2 PLATES); BRIDGE OVER THE THAMES, WEST LONDON EXTENSION RAILWAY (5 PLATES); ARMOUR PLATES; SUSPENSION BRIDGE, THAMES (4 PLATES); THE ALLEN ENGINE; SUSPENSION BRIDGE, AVON (3 PLATES); UNDERGROUND RAILWAY (3 PLATES).

HUMBER'S MODERN ENGINEERING.

SECOND SERIES. Imp. 4to, with 3 Double Plates, Photographic Portrait of Robert Stephenson, C.E., M.P., F.R.S., &c., and copious descriptive Letterpress, Specifications, &c. Half-morocco . . . . . **£3 3s.**

LIST OF THE PLATES AND DIAGRAMS.

BIRKENHEAD DOCKS, LOW WATER BASIN (15 PLATES); CHARING CROSS STATION ROOF, C. C. RAILWAY (3 PLATES); DIGSWELL VIADUCT, GREAT NORTHERN RAILWAY; ROBBERY WOOD VIADUCT, GREAT NORTHERN RAILWAY; IRON PERMANENT WAY; CLYDACH VIADUCT, MERTHYR, TREDEGAR, AND ABERGAVENNY RAILWAY; EBBW VIADUCT, MERTHYR, TREDEGAR, AND ABERGAVENNY RAILWAY; COLLEGE WOOD VIADUCT, CORNWALL RAILWAY; DUBLIN WINTER PALACE ROOF (3 PLATES); BRIDGE OVER THE THAMES, L. C. & D. RAILWAY (6 PLATES); ALBERT HARBOUR, GREENOCK (4 PLATES).

HUMBER'S MODERN ENGINEERING.

THIRD SERIES. Imp. 4to, with 40 Double Plates, Photographic Portrait of J. R. M'Clean, late Pres. Inst. C.E., and copious descriptive Letterpress, Specifications, &c. Half-morocco . . . . . **£3 3s.**

LIST OF THE PLATES AND DIAGRAMS.

MAIN DRAINAGE, METROPOLIS.—*North Side.*—MAP SHOWING INTERCEPTION OF SEWERS; MIDDLE LEVEL SEWER (2 PLATES); OUTFALL SEWER, BRIDGE OVER RIVER LEA (3 PLATES); OUTFALL SEWER, BRIDGE OVER MARSH LANE, NORTH WOOLWICH RAILWAY, AND BOW AND BARKING RAILWAY JUNCTION; OUTFALL SEWER, BRIDGE OVER BOW AND BARKING RAILWAY (3 PLATES); OUTFALL SEWER, BRIDGE OVER EAST LONDON WATER-WORKS' FEEDER (2 PLATES); OUTFALL SEWER RESERVOIR (2 PLATES); OUTFALL SEWER, TUMBLING BAY AND OUTLET; OUTFALL SEWER, PENSTOCKS. *South Side.*—OUTFALL SEWER, BERMONDSEY BRANCH (2 PLATES); OUTFALL SEWER, RESERVOIR AND OUTLET (4 PLATES); OUTFALL SEWER, FILTH HOIST; SECTIONS OF SEWERS NORTH AND SOUTH SIDES).

THAMES EMBANKMENT.—SECTION OF RIVER WALL; STEAMBOAT PIER, WESTMINSTER (2 PLATES); LANDING STAIRS BETWEEN CHARING CROSS AND WATERLOO BRIDGES; YORK GATE (2 PLATES); OVERFLOW AND OUTLET AT SAVOY STREET SEWER (3 PLATES); STEAMBOAT PIER, WATERLOO BRIDGE (3 PLATES); JUNCTION OF SEWERS, PLANS AND SECTIONS; GULLIES, PLANS AND SECTIONS; ROLLING STOCK; GRANITE AND IRON FORTS.

HUMBER'S MODERN ENGINEERING.

FOURTH SERIES. Imp. 4to, with 36 Double Plates, Photographic Portrait of John Fowler, late Pres. Inst. C.E., and copious descriptive Letterpress, Specifications, &c. Half-morocco . . . . . **£3 3s.**

LIST OF THE PLATES AND DIAGRAMS.

ABBEY MILLS PUMPING STATION, MAIN DRAINAGE, METROPOLIS (4 PLATES); BARROW DOCKS (5 PLATES); MANQUIS VIADUCT, SANTIAGO AND VALPARAISO RAILWAY, (2 PLATES); ADAM'S LOCOMOTIVE, ST. HELEN'S CANAL RAILWAY (2 PLATES); CANNON STREET STATION ROOF, CHARING CROSS RAILWAY (3 PLATES); ROAD BRIDGE OVER THE RIVER MOKA (2 PLATES); TELEGRAPHIC APPARATUS FOR MESOPOTAMIA; VIADUCT OVER THE RIVER WYE, MIDLAND RAILWAY (3 PLATES); ST. GERMANS VIADUCT, CORNWALL RAILWAY (2 PLATES); WROUGHT-IRON CYLINDER FOR DIVING BELL; MILLWALL DOCKS (6 PLATES); MILROY'S PATENT EXCAVATOR; METROPOLITAN DISTRICT RAILWAY (6 PLATES); HARBOURS, PORTS, AND BREAKWATERS (3 PLATES).

MARINE ENGINEERING, SHIPBUILDING, NAVIGATION, &c.

THE NAVAL ARCHITECT'S AND SHIPBUILDER'S POCKET-BOOK

of Formulæ, Rules, and Tables, and Marine Engineer's and Surveyor's Handy Book of Reference. By CLEMENT MACKROW, M.I.N.A. Seventh Edition, 700 pp., with 300 Illustrations. Fcap., leather . . **12/6**

SUMMARY OF CONTENTS:—SIGNS AND SYMBOLS, DECIMAL FRACTIONS.—TRIGONOMETRY.—PRACTICAL GEOMETRY.—MENSURATION.—CENTRES AND MOMENTS OF FIGURES.—MOMENTS OF INERTIA AND RADII OF GYRATION.—ALGEBRAICAL EXPRESSIONS FOR SIMPSON'S RULES.—MECHANICAL PRINCIPLES.—CENTRE OF GRAVITY.—LAWS OF MOTION.—DISPLACEMENT, CENTRE OF BUOYANCY.—CENTRE OF GRAVITY OF SHIP'S HULL.—STABILITY CURVES AND METACENTRES.—SEA AND SHALLOW-WATER WAVES.—ROLLING OF SHIPS.—PROPULSION AND RESISTANCE OF VESSELS.—SPEED TRIALS.—SAILING, CENTRE OF EFFORT.—DISTANCES DOWN RIVERS, COAST LINES.—STEERING AND RUDDERS OF VESSELS.—LAUNCHING CALCULATIONS AND VELOCITIES.—WEIGHT OF MATERIAL AND GEAR.—GUN PARTICULARS AND WEIGHT.—STANDARD GAUGES.—RIVETED JOINTS AND RIVETING.—STRENGTH AND TESTS OF MATERIALS.—BINDING AND SHEARING STRESSES, &c.—STRENGTH OF SHAFTING, PILLARS, WHEELS, &c.—HYDRAULIC DATA, &c.—CONIC SECTIONS, CATENARIAN CURVES.—MECHANICAL POWERS, WORK.—BOARD OF TRADE REGULATIONS FOR BOILERS AND ENGINES.—BOARD OF TRADE REGULATIONS FOR SHIPS.—LLOYD'S RULES FOR BOILERS.—LLOYD'S WEIGHT OF CHAINS.—LLOYD'S SCANTLINGS FOR SHIPS.—DATA OF ENGINES AND VESSELS.—SHIPS' FITTINGS AND TESTS.—SEASONING PRESERVING TIMBER.—MEASUREMENT OF TIMBER.—ALLOYS, PAINTS, VARNISHES.—DATA FOR STOWAGE.—ADMIRALTY TRANSPORT REGULATIONS.—RULES FOR HORSE-POWER, SCREW PROPELLERS, &c.—PERCENTAGES FOR BUTT STRAPS, &c.—PARTICULARS OF YACHTS.—MASTING AND RIGGING VESSELS.—DISTANCES OF FOREIGN PORTS.—TONNAGE TABLES.—VOCABULARY OF FRENCH AND ENGLISH TERMS.—ENGLISH WEIGHTS AND MEASURES.—FOREIGN WEIGHTS AND MEASURES.—DECIMAL EQUIVALENTS.—FOREIGN MONEY.—DISCOUNT AND WAGES TABLES.—USEFUL NUMBERS AND READY RECKONERS.—TABLES OF CIRCULAR MEASURES.—TABLES OF AREAS OF AND CIRCUMFERENCES OF CIRCLES.—TABLES OF AREAS OF SEGMENTS OF CIRCLES.—TABLES OF SQUARES AND CUBES AND ROOTS OF NUMBERS.—TABLES OF LOGARITHMS OF NUMBERS.—TABLES OF HYPERBOLIC LOGARITHMS.—TABLES OF NATURAL SINES, TANGENTS, &c.—TABLES OF LOGARITHMIC SINES, TANGENTS, &c.

"In these days of advanced knowledge a work like this is of the greatest value. It contains a vast amount of information. We unhesitatingly say that it is the most valuable compilation for its specific purpose that has ever been printed. No naval architect, engineer, surveyor, or seaman, wood or iron shipbuilder, can afford to be without this work."—*Nautical Magazine.*

"Should be used by all who are engaged in the construction or design of vessels. . . . Will be found to contain the most useful tables and formulæ required by shipbuilders, carefully collected from the best authorities, and put together in a popular and simple form. The book is one of exceptional merit."—*Engineer.*

"The professional shipbuilder has now, in a convenient and accessible form, reliable data for solving many of the numerous problems that present themselves in the course of his work."—*Iron.*

"There is no doubt that a pocket-book of this description must be a necessity in the shipbuilding trade. . . The volume contains a mass of useful information clearly expressed and presented in a handy form."—*Marine Engineer.*

WANNAN'S MARINE ENGINEER'S GUIDE

To Board of Trade Examinations for Certificates of Competency. Containing all Latest Questions to Date, with Simple, Clear, and Correct Solutions; Elementary and Verbal Questions and Answers; complete Set of Drawings with Statements completed. By A. C. WANNAN, C.E., and E. W. I. WANNAN, M.I.M.E. Illustrated with numerous Engravings. Crown 8vo, 370 pp., cloth **8/6**

"The book is clearly and plainly written and avoids unnecessary explanations and formulas, and we consider it a valuable book for students of marine engineering."—*Nautical Magazine.*

WANNAN'S MARINE ENGINEER'S POCKET-BOOK.

Containing the Latest Board of Trade Rules and Data for Marine Engineers. By A. C. WANNAN. Second Edition, carefully Revised. Square 18mo, with thumb Index, leather **5/0**

"There is a great deal of useful information in this little pocket-book. It is of the rule-of thumb order, and is, on that account, well adapted to the uses of the sea-going engineer."—*Engineer.*

MARINE ENGINES AND STEAM VESSELS.

A Treatise on. By ROBERT MURRAY, C.E. Eighth Edition, thoroughly Revised, with considerable Additions by the Author and by GEORGE CARLISLE, C.E., Senior Surveyor to the Board of Trade. 12mo, cloth . **4/6**

SEA TERMS, PHRASES, AND WORDS

(Technical Dictionary of) used in the English and French Languages (English-French, French-English). For the Use of Seamen, Engineers, Pilots, Shipbuilders, Shipowners, and Ship-brokers. Compiled by W. PIRRIE, late of the African Steamship Company. Fcap. 8vo, cloth limp **5/0**

"This volume will be highly appreciated by seamen, engineers, pilots, shipbuilders and shipowners. It will be found wonderfully accurate and complete."—*Scotsman.*

"A very useful dictionary, which has long been wanted by French and English engineers, masters, officers and others."—*Shipping World.*

ELECTRIC SHIP-LIGHTING.

A Handbook on the Practical Fitting and Running of Ships' Electrical Plant, for the Use of Shipowners and Builders, Marine Electricians and Sea-going Engineers in Charge. By J. W. URQUHART, Author of "Electric Light," "Dynamo Construction," &c. Second Edition, Revised and Extended. 326 pp., with 88 Illustrations. Crown 8vo, cloth. [*Just Published.* **7/6**

MARINE ENGINEER'S POCKET-BOOK.

Consisting of useful Tables and Formulæ. By FRANK PROCTOR, A.I.N.A. Third Edition. Royal 32mo, leather, gilt edges, with strap . . . **4/0**

"We recommend it to our readers as going far to supply a long-felt want."—*Naval Science.*

"A most useful companion to all marine engineers."—*United Service Gazette.*

ELEMENTARY ENGINEERING.

A Manual for Young Marine Engineers and Apprentices. In the Form of Questions and Answers on Metals, Alloys, Strength of Materials, Construction and Management of Marine Engines and Boilers, Geometry, &c., &c. With an Appendix of Useful Tables. By J. S. BREWER. Crown 8vo, cloth . **1/6**

"Contains much valuable information for the class for whom it is intended, especially in the chapters on the management of boilers and engines."—*Nautical Magazine.*

PRACTICAL NAVIGATION.

Consisting of THE SAILOR'S SEA-BOOK, by JAMES GREENWOOD and W. H. ROSSER; together with the exquisite Mathematical and Nautical Tables for the Working of the Problems, by HENRY LAW, C.E., and Professor J. R. YOUNG. Illustrated. 12mo, strongly half-bound **7/0**

THE ART AND SCIENCE OF SAILMAKING.

By SAMUEL B. SADLER, Practical Sailmaker, late in the employment of Messrs. Ratsey and Lapthorne, of Cowes and Gosport. With Plates and other Illustrations. Small 4to, cloth **12/6**

"This extremely practical work gives a complete education in all the branches of the manufacture, cutting out, roping, seaming, and goring. It is copiously illustrated, and will form a first-rate text-book and guide."—*Portsmouth Times.*

CHAIN CABLES AND CHAINS.

Comprising Sizes and Curves of Links, Studs, &c., Iron for Cables and Chains, Chain Cable and Chain Making, Forming and Welding Links, Strength of Cables and Chains, Certificates for Cables, Marking Cables, Prices of Chain Cables and Chains, Historical Notes, Acts of Parliament, Statutory Tests, Charges for Testing, List of Manufacturers of Cables, &c., &c. By THOMAS W. TRAILL, F.E.R.N., M.Inst.C.E., Engineer-Surveyor-in-Chief, Board of Trade, Inspector of Chain Cable and Anchor Proving Establishments, and General Superintendent Lloyd's Committee on Proving Establishments. With numerous Tables, Illustrations, and Lithographic Drawings. Folio, cloth, bevelled boards . . . . . **£2 2s.**

"It contains a vast amount of valuable information. Nothing seems to be wanting to make it a complete and standard work of reference on the subject."—*Nautical Magazine.*

MINING, METALLURGY, AND COLLIERY WORKING.

THE METALLURGY OF GOLD.

A Practical Treatise on the Metallurgical Treatment of Gold-bearing Ores. Including the Assaying, Melting, and Refinipg of Gold. By M. EISSLER, Mining Engineer, A.I.M.E., Member of the Institute of Mining and Metallurgy. Author of "Modern High Explosives," "The Metallurgy of Silver," &c., &c. Fifth Edition, Enlarged and Re-arranged. With over 300 illustrations and numerous Folding Plates. Medium 8vo, cloth.
[*Just Published. Net* **21/0**

"This book thoroughly deserves its title of a 'Practical Treatise.' The whole process of gold milling, from the breaking of the quartz to the assay of the bullion, is described in clear and orderly narrative and with much, but not too much, fulness of detail."—*Saturday Review.*

"The work is a storehouse of information and valuable data, and we strongly recommend it to all professional men engaged in the gold-mining industry."—*Mining Journal.*

THE CYANIDE PROCESS OF GOLD EXTRACTION.

Including its Practical Application on the Witwatersrand Gold Fields in South Africa. By M. EISSLER, M.E., Author of "The Metallurgy of Gold," &c. With Diagrams and Working Drawings. Second Edition, Revised and Enlarged. 8vo, cloth **7/6**

"This book is just what was needed to acquaint mining men with the actual working of a process which is not only the most popular, but is, as a general rule, the most successful for the extraction of gold from tailings."—*Mining Journal.*

"The work will prove invaluable to all interested in gold mining, whether metallurgists or as investors."—*Chemical News.*

DIAMOND DRILLING FOR GOLD & OTHER MINERALS.

A Practical Handbook on the Use of Modern Diamond Core Drills in Prospecting and Exploiting Mineral-Bearing Properties, including Particulars of the Costs of Apparatus and Working. By G. A. DENNY, M.N.E. Inst. M.E., M.I.M. and M. Author of "The Klerksdorp Goldfields." Medium 8vo, 168 pp., with Illustrative Diagrams. [*Just Published.* **12/6**

"There is certainly scope for a work on diamond drilling, and Mr. Denny deserves grateful recognition for supplying a decided want. We strongly recommend every board of directors to carefully peruse the pages treating of the applicability of diamond drilling to auriferous deposits, and, under certain conditions, its advantages over shaft sinking for systematic prospecting, both from the surface and underground. The author has given us a valuable volume of eminently practical data that should be in the possession of those interested in mining."—*Mining Journal.*

"Mr. Denny's handbook is the first English work to give a detailed account of the use of modern diamond core-drills in searching for mineral deposits. The work contains much information of a practical character, including particulars of the cost of apparatus and of working."—*Nature.*

FIELD TESTING FOR GOLD AND SILVER.

A Practical Manual for Prospectors and Miners. By W. H. MERRITT, M.N.E. Inst. M.E., A.R.S.M., &c. With Photographic Plates and other Illustrations. Fcap. 8vo, leather. [*Just Published. Net* **5/0**

"As an instructor of prospectors' classes Mr. Merritt has the advantage of knowing exactly the information likely to be most valuable to the miner in the field. The contents cover all the details of sampling and testing gold and silver ores. The work will be a useful addition to a prospector's kit."—*Mining Journal.*

"It gives the gist of the author's experience as a teacher of prospectors, and is a book which no prospector could use habitually without finding it pan out well."—*Scotsman.*

THE PROSPECTOR'S HANDBOOK.

A Guide for the Prospector and Traveller in search of Metal-Bearing or other Valuable Minerals. By J. W. ANDERSON, M.A. (Camb.), F.R.G.S., Author of "Fiji and New Caledonia." Eighth Edition, thoroughly Revised and much Enlarged. Small crown 8vo, cloth, **3/6**; or, leather, pocket-book form, with tuck. [*Just Published.* **4/6**

"Will supply a much-felt want, especially among Colonists, in whose way are so often thrown many mineralogical specimens the value of which it is difficult to determine."—*Engineer.*

"How to find commercial minerals, and how to identify them when they are found, are the leading points to which attention is directed. The author has managed to pack as much practical detail into his pages as would supply material for a book three times its size."—*Mining Journal.*

THE METALLURGY OF SILVER.

A Practical Treatise on the Amalgamation, Roasting, and Lixiviation of Silver Ores. Including the Assaying, Melting, and Refining of Silver Bullion. By M. EISSLER, Author of "The Metallurgy of Gold," &c. Third Edition. Crown 8vo, cloth **10/6**

"A practical treatise, and a technical work which we are convinced will supply a long-felt want amongst practical men, and at the same time be of value to students and others indirectly connected with the industries."—*Mining Journal.*

"From first to last the book is thoroughly sound and reliable."—*Colliery Guardian.*

"For chemists, practical miners, assayers, and investors alike we do not know of any work on the subject so handy and yet so comprehensive."—*Glasgow Herald.*

THE METALLURGY OF ARGENTIFEROUS LEAD.

A Practical Treatise on the Smelting of Silver-Lead Ores and the Refining of Lead Bullion. Including Reports on various Smelting Establishments and Descriptions of Modern Smelting Furnaces and Plants in Europe and America. By M. EISSLER, M.E., Author of "The Metallurgy of Gold," &c. Crown 8vo, 400 pp., with 183 Illustrations, cloth **12/6**

"The numerous metallurgical processes, which are fully and extensively treated of, embrace all the stages experienced in the passage of the lead from the various natural states to its issue from the refinery as an article of commerce."—*Practical Engineer.*

"The present volume fully maintains the reputation of the author. Those who wish to obtain a thorough insight into the present state of this industry cannot do better than read this volume, and all mining engineers cannot fail to find many useful hints and suggestions in it."—*Industries.*

METALLIFEROUS MINERALS AND MINING.

By D. C. DAVIES, F.G.S., Mining Engineer. Sixth Edition, thoroughly Revised and much Enlarged by his Son, E. HENRY DAVIES, M.E., F.G.S. 600 pp., with 173 Illustrations. Large crown 8vo, cloth

[*Just Published. Net* **12/6**

"Neither the practical miner nor the general reader, interested in mines, can have a better book for his companion and his guide."—*Mining Journal.*

"We are doing our readers a service in calling their attention to this valuable work."—*Mining World.*

"As a history of the present state of mining throughout the world this book has a real value, and it supplies an actual want."—*Athenæum.*

MACHINERY FOR METALLIFEROUS MINES.

A Practical Treatise for Mining Engineers, Metallurgists, and Managers of Mines. By E. HENRY DAVIES, M.E., F.G.S. Crown 8vo, 580 pp., with upwards of 300 Illustrations, cloth. **12/6**

"Mr. Davies, in this handsome volume, has done the advanced student and the manager of mines good service. Almost every kind of machinery in actual use is carefully described, and the woodcuts and plates are good."—*Athenæum.*

"From cover to cover the work exhibits all the same characteristics which excite the confidence and attract the attention of the student as he peruses the first page. The work may safely be recommended. By its publication the literature connected with the industry will be enriched and the reputation of its author enhanced."—*Mining Journal.*

EARTHY AND OTHER MINERALS AND MINING.

By D. C. DAVIES, F.G.S., Author of "Metalliferous Minerals," &c. Third Edition, Revised and Enlarged by his Son, E. HENRY DAVIES, M.E., F.G.S. With about 100 Illustrations. Crown 8vo, cloth **12/6**

"We do not remember to have met with any English work on mining matters that contains the same amount of information packed in equally convenient form."—*Academy.*

"We should be inclined to rank it as among the very best of the handy technical and trades manuals which have recently appeared."—*British Quarterly Review.*

BRITISH MINING.

A Treatise on the History, Discovery, Practical Development, and Future Prospects of Metalliferous Mines in the United Kingdom. By ROBERT HUNT, F.R.S., late Keeper of Mining Records. Upwards of 950 pp., with 230 Illustrations. Second Edition, Revised. Super-royal 8vo, cloth **£2 2s.**

"The book is a treasure-house of statistical information on mining subjects, and we know of no other work embodying so great a mass of matter of this kind. Were this the only merit of Mr. Hunt's volume it would be sufficient to render it indispensable in the library of every one interested in the development of the mining and metallurgical industries of this country."—*Athenæum.*

POCKET-BOOK FOR MINERS AND METALLURGISTS.

Comprising Rules, Formulæ, Tables, and Notes for Use in Field and Office Work. By F. DANVERS POWER, F.G.S., M.E. Second Edition, Corrected. Fcap. 8vo, leather. [*Just Published.* **9/0**

"This excellent book is an admirable example of its kind, and ought to find a large sale amongst English-speaking prospectors and mining engineers."—*Engineering.*

THE MINER'S HANDBOOK.

A Handy Book of Reference on the subjects of Mineral Deposits, Mining Operations, Ore Dressing, &c. For the Use of Students and others interested in Mining Matters. By JOHN MILNE, F.R.S., Professor of Mining in the Imperial University of Japan. Revised Edition. Fcap. 8vo, leather . **7/6**

"Professor Milne's handbook is sure to be received with favour by all connected with mining, and will be extremely popular among students."—*Athenæum.*

THE IRON ORES of GREAT BRITAIN and IRELAND.

Their Mode of Occurrence, Age and Origin, and the Methods of Searching for and Working Them. With a Notice of some of the Iron Ores of Spain. By J. D. KENDALL, F.G.S., Mining Engineer. Crown 8vo, cloth . . **16/0**

"The author has a thorough practical knowledge of his subject, and has supplemented a careful study of the available literature by unpublished information derived from his own observations. The result is a very useful volume, which cannot fail to be of value to all interested in the iron industry of the country."—*Industries.*

MINE DRAINAGE.

A Complete Practical Treatise on Direct-Acting Underground Steam Pumping Machinery. By STEPHEN MICHELL. Second Edition, Re-written and Enlarged, 390 pp. With about 250 Illustrations. Royal 8vo, cloth. [*Just Published. Net* **25/0**

SUMMARY OF CONTENTS:—HORIZONTAL PUMPING ENGINES.—ROTARY AND NON-ROTARY HORIZONTAL ENGINES.—SIMPLE AND COMPOUND STEAM PUMPS.—VERTICAL PUMPING ENGINES.—ROTARY AND NON-ROTARY VERTICAL ENGINES.—SIMPLE AND COMPOUND STEAM PUMPS.—TRIPLE-EXPANSION STEAM PUMPS.—PULSATING STEAM PUMPS.—PUMP VALVES.—SINKING PUMPS, &c., &c.

"This volume contains an immense amount of important and interesting new matter. The book should undoubtedly prove of great use to all who wish for information on the subject, inasmuch as the different patterns of steam pumps are not alone lucidly described and clearly illustrated, but in addition numerous tables are supplied, in which their sizes, capacity, price, &c., are set forth, hence facilitating immensely the rational selection of a pump to suit any purpose that the reader may desire, or, on the other hand, supplying him with useful information about any of the pumps that come within the scope of the volume."—*The Engineer.*

THE COLLIERY MANAGER'S HANDBOOK.

A Comprehensive Treatise on the Laying-out and Working of Collieries, Designed as a Book of Reference for Colliery Managers, and for the Use of Coal Mining Students preparing for First-class Certificates. By CALEB PAMELY, Mining Engineer and Surveyor; Member of the North of England Institute of Mining and Mechanical Engineers; and Member of the South Wales Institute of Mining Engineers. With 700 Plans, Diagrams, and other Illustrations. Fourth Edition, Revised and Enlarged, medium 8vo, over 900 pp. Strongly bound . . . . . **£1 5s.**

SUMMARY OF CONTENTS:—GEOLOGY.—SEARCH FOR COAL.—MINERAL LEASES AND OTHER HOLDINGS.—SHAFT SINKING.—FITTING UP THE SHAFT AND SURFACE ARRANGEMENTS.—STEAM BOILERS AND THEIR FITTINGS.—TIMBERING AND WALLING.—NARROW WORK AND METHODS OF WORKING.—UNDERGROUND CONVEYANCE.—DRAINAGE.—THE GASES MET WITH IN MINES; VENTILATION.—ON THE FRICTION OF AIR IN MINES.—THE PRIESTMAN OIL ENGINE; PETROLEUM AND NATURAL GAS.—SURVEYING AND PLANNING.—SAFETY LAMPS AND FIREDAMP DETECTORS.—SUNDRY AND INCIDENTAL OPERATIONS AND APPLIANCES.—COLLIERY EXPLOSIONS.—MISCELLANEOUS QUESTIONS AND ANSWERS.—*Appendix:* SUMMARY OF REPORT OF H.M. COMMISSIONERS ON ACCIDENTS IN MINES.

"Mr. Pamely has not only given us a comprehensive reference book of a very high order, suitable to the requirements of mining engineers and colliery managers, but has also provided mining students with a class-book that is as interesting as it is instructive."—*Colliery Manager.*

"Mr. Pamely's work is eminently suited to the purpose for which it is intended, being clear, interesting, exhaustive, rich in detail, and up to date, giving descriptions of the latest machines in every department. A mining engineer could scarcely go wrong who followed this work."—*Colliery Guardian.*

"This is the most complete 'all-round' work on coal-mining published in the English language. . . . No library of coal-mining books is complete without it."—*Colliery Engineer* (Scranton, Pa., U.S.A.).

COLLIERY WORKING AND MANAGEMENT.

Comprising the Duties of a Colliery Manager, the Oversight and Arrangement of Labour and Wages, and the different Systems of Working Coal Seams. By H. F. BULMAN and R. A. S. REDMAYNE. 350 pp., with 28 Plates and other Illustrations, including Underground Photographs. Medium 8vo, cloth. [*Just Published.* **15/0**

"This is, indeed, an admirable Handbook for Colliery Managers, in fact it is an indispensable adjunct to a Colliery Manager's education, as well as being a most useful and interesting work on the subject for all who in any way have to do with coal mining. The underground photographs are an attractive feature of the work, being very lifelike and necessarily true representations of the scenes they depict."—*Colliery Guardian.*

"Mr. Bulman and Mr. Redmayne, who are both experienced Colliery Managers of great literary ability, are to be congratulated on having supplied an authoritative work dealing with a side of the subject of coal mining which has hitherto received but scant treatment. The authors elucidate their text by 119 woodcuts and 28 plates, most of the latter being admirable reproductions of photographs taken underground with the aid of the magnesium flash-light. These illustrations are excellent."—*Nature.*

COAL AND COAL MINING.

By the late Sir WARINGTON W. SMYTH, F.R.S., Chief Inspector of the Mines of the Crown. Eighth Edition, Revised and Extended by T. FORSTER BROWN, Mining Engineer, Chief Inspector of the Mines of the Crown and of the Duchy of Cornwall. Crown 8vo, cloth. [*Just Published.* **3/6**

"As an outline is given of every known coal-field in this and other countries, as well as of the principal methods of working, the book will doubtless interest a very large number of readers."—*Mining Journal.*

NOTES AND FORMULÆ FOR MINING STUDENTS.

By JOHN HERMAN MERIVALE, M.A., Late Professor of Mining in the Durham College of Science, Newcastle-upon-Tyne. Fourth Edition, Revised and Enlarged. By H. F. BULMAN, A.M.Inst.C.E. Small crown 8vo, cloth. **2/6**

"The author has done his work in a creditable manner, and has produced a book that will be of service to students and those who are practically engaged in mining operations."—*Engineer.*

INFLAMMABLE GAS AND VAPOUR IN THE AIR

(The Detection and Measurement of). By FRANK CLOWES, D.Sc., Lond., F.I.C., Prof. of Chemistry in the University College, Nottingham. With a Chapter on THE DETECTION AND MEASUREMENT OF PETROLEUM VAPOUR by BOVERTON REDWOOD, F.R.S.E., Consulting Adviser to the Corporation of London under the Petroleum Acts. Crown 8vo, cloth. *Net* **5/0**

"Professor Clowes has given us a volume on a subject of much industrial importance . . . Those interested in these matters may be recommended to study this book, which is easy of comprehension and contains many good things."—*The Engineer.*

"A book that no mining engineer—certainly no coal miner—can afford to ignore or to leave unread."—*Mining Journal.*

COAL & IRON INDUSTRIES of the UNITED KINGDOM.

Comprising a Description of the Coal Fields, and of the Principal Seams of Coal, with Returns of their Produce and its Distribution, and Analyses of Special Varieties. Also, an Account of the Occurrence of Iron Ores in Veins or Seams; Analyses of each Variety; and a History of the Rise and Progress of Pig Iron Manufacture. By RICHARD MEADE. 8vo, cloth . . **£1 8s.**

"Of this book we may unreservedly say that it is the best of its class which we have ever met. . . . A book of reference which no one engaged in the iron or coal trades should omit from his library."—*Iron and Coal Trades Review.*

ASBESTOS AND ASBESTIC.

Their Properties, Occurrence, and Use. By ROBERT H. JONES, F.S.A., Mineralogist, Hon. Mem. Asbestos Club, Black Lake, Canada. With Ten Collotype Plates and other Illustrations. Demy 8vo, cloth. [*Just Published.* **16/0**

"An interesting and invaluable work."—*Colliery Guardian.*

GRANITES AND OUR GRANITE INDUSTRIES.

By GEORGE F. HARRIS, F.G.S., Membre de la Société Belge de Géologie, Lecturer on Economic Geology at the Birkbeck Institution, &c. With Illustrations. Crown 8vo, cloth **2/6**

"A clearly and well-written manual for persons engaged or interested in the granite industry."—*Scotsman.*

TRAVERSE TABLES.

For use in Mine Surveying. By W. LINTERN, Mining Engineer. Crown 8vo, cloth. [*Just Published. Net* **3/0**

ELECTRICITY, ELECTRICAL ENGINEERING, &c.

SUBMARINE TELEGRAPHS.

Their History, Construction, and Working. Founded in part on WÜNSCHENDORFF'S "Traité de Télégraphie Sous-Marine," and Compiled from Authoritative and Exclusive Sources. By CHARLES BRIGHT, F.R.S.E. Super-royal 8vo, about 780 pp., fully Illustrated, including Maps and Folding Plates.
[*Just Published. Net* **£3 3s.**

"There are few, if any, persons more fitted to write a treatise on submarine telegraphy than Mr. Charles Bright. The author has done his work admirably, and has written in a way which will appeal as much to the layman as to the engineer. This admirable volume must, for many years to come, hold the position of the English classic on submarine telegraphy."—*Engineer.*

"This book is full of information. It makes a book of reference which should be in every engineer's library."—*Nature.*

"Mr. Bright's interestingly written and admirably illustrated book will meet with a welcome reception from cable men."—*Electrician.*

"The author deals with his subject from all points of view—political and strategical as well as scientific. The work will be of interest, not only to men of science, but to the general public. We can strongly recommend it."—*Athenæum.*

"The work contains a great store of technical information concerning the making and working of submarine telegraphs. In bringing together the most valuable results relating to the evolution of the telegraph, the author has rendered a service that will be very widely appreciated."—*Morning Post.*

DYNAMO ELECTRIC MACHINERY.

Its Construction, Design, and Operation (Direct Current Machines). By SAMUEL SHELDON, A.M., Ph.D., assisted by H. MASON, B.S. Second Edition, Revised. Large crown 8vo, cloth. With 202 illustrations.
[*Just Published. Net* **10/6**

THE ELECTRICAL ENGINEER'S POCKET-BOOK.

Consisting of Modern Rules, Formulæ, Tables, and Data. By H. R. KEMPE, M.Inst.E.E., A.M.Inst.C.E., Technical Officer Postal Telegraphs, Author of "A Handbook of Electrical Testing," "The Engineer's Year-Book," &c. Second Edition, thoroughly Revised, with Additions. With numerous Illustrations. Royal 32mo, oblong, leather **5/0**

"It is the best book of its kind."—*Electrical Engineer.*

"The Electrical Engineer's Pocket-Book is a good one."—*Electrician.*

"Strongly recommended to those engaged in the electrical industries."—*Electrical Review.*

ELECTRIC LIGHT FITTING.

A Handbook for Working Electrical Engineers, embodying Practical Notes on Installation Management. By J. W. URQUHART, Electrician, Author of "Electric Light," &c. With numerous Illustrations. Third Edition, Revised, with Additions. Crown 8vo, cloth. [*Just Published.* **5/0**

"This volume deals with what may be termed the mechanics of electric lighting, and is addressed to men who are already engaged in the work, or are training for it. The work traverses a great deal of ground, and may be read as a sequel to the same author's useful work on 'Electric Light.'"—*Electrician.*

ELECTRIC LIGHT.

Its Production and Use, Embodying Plain Directions for the Treatment of Dynamo-Electric Machines, Batteries, Accumulators, and Electric Lamps. By J. W. URQUHART, C.E. Sixth Edition, Revised, with Additions and 145 Illustrations. Crown 8vo, cloth. [*Just Published.* **7/6**

"The whole ground of electric lighting is more or less covered and explained in a very clear and concise manner."—*Electrical Review.*

"A *vade-mecum* of the salient facts connected with the science of electric lighting."—*Electrician.*

DYNAMO CONSTRUCTION.

A Practical Handbook for the Use of Engineer-Constructors and Electricians-in-Charge. Embracing Framework Building, Field Magnet and Armature Winding and Grouping, Compounding, &c. By J. W. URQUHART. Second Edition, Enlarged. Crown 8vo, cloth **7/6**

"Mr. Urquhart's book is the first one which deals with these matters in such a way that the engineering student can understand them. The book is very readable, and the author leads his readers up to difficult subjects by reasonably simple tests."—*Engineering Review.*

THE MANAGEMENT OF DYNAMOS.

A Handy Book of Theory and Practice for the Use of Mechanics, Engineers, Students, and others in Charge of Dynamos. By G. W. LUMMIS-PATERSON. Second Edition, thoroughly Revised and Enlarged. With numerous Illustrations. Crown 8vo, cloth. [*Just Published.* **4/6**

"An example which deserves to be taken as a model by other authors. The subject is treated in a manner which any intelligent man who is fit to be entrusted with charge of an engine should be able to understand. It is a useful book to all who make, tend, or employ electric machinery." —*Architect.*

THE STANDARD ELECTRICAL DICTIONARY.

A Popular Encyclopædia of Words and Terms Used in the Practice of Electrical Engineering. By T. O'CONOR SLOANE, A.M., Ph.D. Second Edition, with Appendix to date. Crown 8vo, 680 pp., 390 Illustrations, cloth. [*Just Published.* **7/6**

"The work has many attractive features in it, and is, beyond doubt, a well put together and useful publication. The amount of ground covered may be gathered from the fact that in the index about 5,600 references will be found."—*Electrical Review.*

ELECTRIC SHIP-LIGHTING.

A Handbook on the Practical Fitting and Running of Ships' Electrical Plant. For the Use of Shipowners and Builders, Marine Electricians, and Seagoing Engineers-in-Charge. By J. W. URQUHART, C.E. Second Edition, Revised and Extended. 326 pp., with 88 Illustrations, Crown 8vo, cloth. [*Just Published.* **7/6**

"The subject of ship electric lighting is one of vast importance, and Mr. Urquhart is to be highly complimented for placing such a valuable work at the service of marine electricians."—*The Steamship.*

ELECTRIC LIGHT FOR COUNTRY HOUSES.

A Practical Handbook on the Erection and Running of Small Installations, with Particulars of the Cost of Plant and Working. By J. H. KNIGHT. Third Edition, Revised. Crown 8vo, wrapper. [*Just Published.* **1/0**

"The book contains excellent advice and many practical hints for the help of those who wish to light their own houses."—*Building News.*

ELECTRIC LIGHTING (ELEMENTARY PRINCIPLES OF).

By ALAN A. CAMPBELL SWINTON, M.Inst.C.E., M.Inst.E.E. Fourth Edition, Revised. With 16 Illustrations. Crown 8vo, cloth. [*Just Published.* **1/6**

"Any one who desires a short and thoroughly clear exposition of the elementary principles of electric lighting cannot do better than read this little work."—*Bradford Observer.*

DYNAMIC ELECTRICITY AND MAGNETISM.

By PHILIP ATKINSON, A.M., Ph.D., Author of "Elements of Static Electricity," &c. Crown 8vo, 417 pp., with 120 Illustrations, cloth . **10/6**

POWER TRANSMITTED BY ELECTRICITY

And applied by the Electric Motor, including Electric Railway Construction. By P. ATKINSON, A.M., Ph.D. With 96 Illustrations. Crown 8vo, cloth **7/6**

HOW TO MAKE A DYNAMO.

A Practical Treatise for Amateurs. Containing numerous Illustrations and Detailed Instructions for Constructing a Small Dynamo to Produce the Electric Light. By ALFRED CROFTS. Sixth Edition, Revised and Enlarged. Crown 8vo, cloth. [*Just Published.* **2/0**

"The instructions given in this unpretentious little book are sufficiently clear and explicit to enable any amateur mechanic possessed of average skill and the usual tools to be found in an amateur's workshop to build a practical dynamo machine."—*Electrician.*

THE STUDENT'S TEXT-BOOK OF ELECTRICITY.

By H. M. NOAD, F.R.S. Cheaper Edition. 650 pp., with 470 Illustrations. Crown 8vo, cloth **9/0**

ARCHITECTURE, BUILDING, &c.

PRACTICAL BUILDING CONSTRUCTION.

A Handbook for Students Preparing for Examinations, and a Book of Reference for Persons Engaged in Building. By JOHN PARNELL ALLEN, Surveyor, Lecturer on Building Construction at the Durham College of Science, Newcastle-on-Tyne. Third Edition, Revised and Enlarged. Medium 8vo, 450 pp., with 1,000 Illustrations, cloth. [*Just Published.* **7/6**

"The most complete exposition of building construction we have seen. It contains all that is necessary to prepare students for the various examinations in building construction."—*Building News.*

"The author depends nearly as much on his diagrams as on his type. The pages suggest the hand of a man of experience in building operations—and the volume must be a blessing to many teachers as well as to students."—*The Architect.*

"The work is sure to prove a formidable rival to great and small competitors alike, and bids fair to take a permanent place as a favourite student's text-book. The large number of illustrations deserve particular mention for the great merit they possess for purposes of reference in exactly corresponding to convenient scales."—*Journal of the Royal Institute of British Architects.*

PRACTICAL MASONRY.

A Guide to the Art of Stone Cutting. Comprising the Construction, Setting Out, and Working of Stairs, Circular Work, Arches, Niches, Domes, Pendentives, Vaults, Tracery Windows, &c., &c. For the Use of Students, Masons, and other Workmen. By WILLIAM R. PURCHASE, Building Inspector to the Borough of Hove. Third Edition, with Glossary of Terms. Royal 8vo, 142 pp., with 52 Lithographic Plates, comprising nearly 400 separate Diagrams, cloth. [*Just Published.* **7/6**

"Mr. Purchase's 'Practical Masonry' will undoubtedly be found useful to all interested in this important subject, whether theoretically or practically. Most of the examples given are from actual work carried out, the diagrams being carefully drawn. The book is a practical treatise on the subject, the author himself having commenced as an operative mason, and afterwards acted as foreman mason on many large and important buildings prior to the attainment of his present position. It should be found of general utility to architectural students and others, as well as to those to whom it is specially addressed."—*Journal of the Royal Institute of British Architects.*

MODERN PLUMBING, STEAM AND HOT WATER HEATING.

A New Practical Work for the Plumber, the Heating Engineer, the Architect, and the Builder. By J. J. LAWLER, Author of "American Sanitary Plumbing," &c. With 284 Illustrations and Folding Plates. 4to, cloth. [*Just Published. Net* **21/-**

HEATING BY HOT WATER.

With Information and Suggestions on the best Methods of Heating Public, Private and Horticultural Buildings. By WALTER JONES. Second Edition. With 96 Illustrations, crown 8vo, cloth . . . . . *Net* **2/6**

"We confidently recommend all interested in heating by hot water to secure a copy of this valuable little treatise."—*The Plumber and Decorator.*

CONCRETE: ITS NATURE AND USES.

A Book for Architects, Builders, Contractors, and Clerks of Works. By GEORGE L. SUTCLIFFE, A.R.I.B.A. 350 pp., with numerous Illustrations. Crown 8vo, cloth **7/6**

"The author treats a difficult subject in a lucid manner. The manual fills a long-felt gap. It is careful and exhaustive; equally useful as a student's guide and an architect's book of reference."—*Journal of the Royal Institute of British Architects.*

"There is room for this new book, which will probably be for some time the standard work on the subject for a builder's purpose."—*Glasgow Herald.*

LOCKWOOD'S BUILDER'S PRICE BOOK for 1901.

A Comprehensive Handbook of the Latest Prices and Data for Builders, Architects, Engineers, and Contractors. Re-constructed, Re-written, and Greatly Enlarged. By FRANCIS T. W. MILLER. 800 closely-printed pages. crown 8vo, cloth **4/0**

"This book is a very useful one, and should find a place in every English office connected with the building and engineering professions."—*Industries.*

"An excellent book of reference."—*Architect.*

"In its new and revised form this Price Book is what a work of this kind should be—comprehensive, reliable, well arranged, legible, and well bound. —*British Architect.*

THE DECORATIVE PART OF CIVIL ARCHITECTURE.

By Sir WILLIAM CHAMBERS, F.R.S. With Portrait, Illustrations, Notes, and an EXAMINATION OF GRECIAN ARCHITECTURE, by JOSEPH GWILT, F.S.A. Revised and Edited by W. H. LEEDS. 66 Plates, 4to, cloth . . **21/0**

THE MECHANICS OF ARCHITECTURE.

A Treatise on Applied Mechanics, especially Adapted to the Use of Architects. By E. W. TARN, M.A., Author of "The Science of Building," &c. Second Edition, Enlarged. Illustrated with 125 Diagrams. Crown 8vo, cloth **7/6**

"The book is a very useful and helpful manual of architectural mechanics."—*Builder.*

A HANDY BOOK OF VILLA ARCHITECTURE.

Being a Series of Designs for Villa Residences in various Styles. With Outline Specifications and Estimates. By C. WICKES, Architect. 61 Plates, 4to, half-morocco, gilt edges . . . . . **£1 11s. 6d.**

"The whole of the designs bear evidence of their being the work of an artistic architect, and they will prove very valuable and suggestive."—*Building News.*

THE ARCHITECT'S GUIDE.

Being a Text-book of Useful Information for Architects, Engineers, Surveyors, Contractors, Clerks of Works, &c., &c. By FREDERICK ROGERS, Architect. Third Edition. Crown 8vo, cloth **3/6**

ARCHITECTURAL PERSPECTIVE.

The whole Course and Operations of the Draughtsman in Drawing a Large House in Linear Perspective. Illustrated by 43 Folding Plates. By F. O. FERGUSON. Second Edition, Enlarged. 8vo, boards **3/6**

"It is the most intelligible of the treatises on this ill-treated subject that I have met with."—E. INGRESS BELL, ESQ., in the *R.I.B.A. Journal.*

PRACTICAL RULES ON DRAWING.

For the Operative Builder and Young Student in Architecture. By GEORGE PYNE. 14 Plates, 4to, boards **7/6**

MEASURING AND VALUING ARTIFICER'S WORK

(The Student's Guide to the Practice of). Containing Directions for taking Dimensions, Abstracting the same, and bringing the Quantities into Bill, with Tables of Constants for Valuation of Labour, and for the Calculation of Areas and Solidities. Originally edited by E. DOBSON, Architect. With Additions by E. W. TARN, M.A. Seventh Edition, Revised. With 8 Plates and 63 Woodcuts. Crown 8vo, cloth. [*Just Published.* **7/6**

"This edition will be found the most complete treatise on the principles of measuring and valuing artificer's work that has yet been published."—*Building News.*

TECHNICAL GUIDE, MEASURER, AND ESTIMATOR.

For Builders and Surveyors. Containing Technical Directions for Measuring Work in all the Building Trades, Complete Specifications for Houses, Roads, and Drains, and an Easy Method of Estimating the parts of a Building collectively. By A. C. BEATON. Ninth Edition. Waistcoat-pocket size, gilt edges **1/6**

"No builder, architect, surveyor, or valuer should be without his 'Beaton.'"—*Building News.*

SPECIFICATIONS FOR PRACTICAL ARCHITECTURE.

A Guide to the Architect, Engineer, Surveyor, and Builder. With an Essay on the Structure and Science of Modern Buildings. Upon the Basis of the Work by ALFRED BARTHOLOMEW, thoroughly Revised, Corrected, and greatly added to by FREDERICK ROGERS, Architect. Third Edition, Revised. 8vo, cloth **15/0**

"The work is too well known to need any recommendation from us. It is one of the books with which every young architect must be equipped."—*Architect.*

THE HOUSE-OWNER'S ESTIMATOR.

Or, What will it Cost to Build, Alter, or Repair? A Price Book for Unprofessional People as well as the Architectural Surveyor and Builder. By J. D. SIMON. Edited by F. T. W. MILLER, A.R.I.B.A. Fifth Edition, Carefully Revised. Crown 8vo, cloth. [*Just Published. Net* **3/6**

"In two years it will repay its cost a hundred times over."—*Field.*

SANITATION AND WATER SUPPLY.

THE PURIFICATION OF SEWAGE.

Being a Brief Account of the Scientific Principles of Sewage Purification, and their Practical Application. By SIDNEY BARWISE, M.D. (Lond.), M.R.C.S., D.P.H. (Camb.), Fellow of the Sanitary Institute, Medical Officer of Health to the Derbyshire County Council. Crown 8vo, cloth. [*Just Published.* **5/0**

"'What process shall we adopt to purify our sewage?' This question has rarely been treated from so many points of view in one book. This volume teems with practical hints, which show the intimate knowledge the author has of his subject."—*The Engineer.*

WATER AND ITS PURIFICATION.

A Handbook for the Use of Local Authorities, Sanitary Officers, and others interested in Water Supply. By S. RIDEAL, D.Sc. Lond., F.I.C. With numerous Illustrations and Tables. Crown 8vo, cloth. [*Just Published.* **7/6**

"Dr. Rideal's book is both interesting and accurate, and contains a most useful *résumé* of the latest knowledge upon the subject of which it treats."—*The Engineer.*

RURAL WATER SUPPLY.

A Practical Handbook on the Supply of Water and Construction of Waterworks for Small Country Districts. By ALLAN GREENWELL, A.M.I.C.E., and W. T. CURRY, A.M.I.C.E. Revised Edition. Crown 8vo, cloth **5/0**

"We conscientiously recommend it as a very useful book for those concerned in obtaining water for small districts, giving a great deal of practical information in a small compass."—*Builder.*

THE WATER SUPPLY OF CITIES AND TOWNS.

By WILLIAM HUMBER, A.M. Inst. C.E., and M.Inst. M.E. Imp. 4to, half-bound morocco. (See page 11.) . . . . . *Net* **£6 6s.**

THE WATER SUPPLY OF TOWNS AND THE CONSTRUCTION OF WATER-WORKS.

By PROFESSOR W. K. BURTON, A.M. Inst. C.E. Second Edition, Revised and Extended. Royal 8vo, cloth. (See page 10) **25/0**

WATER ENGINEERING.

A Practical Treatise on the Measurement, Storage, Conveyance, and Utilisation of Water for the Supply of Towns. By C. SLAGG, A.M. Inst. C.E. **7/6**

SANITARY WORK IN SMALL TOWNS AND VILLAGES.

By CHARLES SLAGG, A. M. Inst. C.E. Crown 8vo, cloth . . . **3/0**

SANITARY ARRANGEMENT OF DWELLING-HOUSES.

By A. J. WALLIS-TAYLER, A.M.Inst.C.E. Crown 8vo, cloth . . **2/6**

MODERN PLUMBING, STEAM AND HOT WATER HEATING.

A New Practical Work for the Plumber, the Heating Engineer, the Architect, and the Builder. By J. J. LAWLER, Author of "American Sanitary Plumbing," &c. With 284 Illustrations and Folding Plates. 4to, cloth.
[*Just Published* (see page 25). *Net* **21/-**

PLUMBING.

A Text-book to the Practice of the Art or Craft of the Plumber. By W. P. BUCHAN, R.P. Eighth Edition, Enlarged. Crown 8vo, cloth . . **3/6**

VENTILATION.

A Text-book to the Practice of the Art of Ventilating Buildings. By W. P. BUCHAN, R.P. Crown 8vo, cloth **3/6**

THE HEALTH OFFICER'S POCKET-BOOK.

A Guide to Sanitary Practice and Law. For Medical Officers of Health, Sanitary Inspectors, Members of Sanitary Authorities, &c. By EDWARD F. WILLOUGHBY, M.D. (Lond.), &c. Fcap. 8vo, cloth **7/6**

"A mine of condensed information of a pertinent and useful kind on the various subjects of which it treats. The different subjects are succinctly but fully and scientifically dealt with."—*The Lancet.*

CARPENTRY, TIMBER, &c.

THE ELEMENTARY PRINCIPLES OF CARPENTRY.

A Treatise on the Pressure and Equilibrium of Timber Framing, the Resistance of Timber, and the Construction of Floors, Arches, Bridges, Roofs, Uniting Iron and Stone with Timber, &c. To which is added an Essay on the Nature and Properties of Timber, &c., with Descriptions of the kinds of Wood used in Building; also numerous Tables of the Scantlings of Timber for different purposes, the Specific Gravities of Materials, &c. By THOMAS TREDGOLD, C.E. With an Appendix of Specimens of Various Roofs of Iron and Stone, Illustrated. Seventh Edition, thoroughly Revised and considerably Enlarged by E. WYNDHAM TARN, M.A., Author of "The Science of Building," &c. With 61 Plates, Portrait of the Author, and several Woodcuts. In One large Vol., 4to, cloth **25/0**

"Ought to be in every architect's and every builder's library."—*Builder.*

"A work whose monumental excellence must commend it wherever skilful carpentry is concerned. The author's principles are rather confirmed than impaired by time. The additional plates are of great intrinsic value."—*Building News.*

WOODWORKING MACHINERY.

Its Rise, Progress, and Construction. With Hints on the Management of Saw Mills and the Economical Conversion of Timber. Illustrated with Examples of Recent Designs by leading English, French, and American Engineers. By M. POWIS BALE, A.M.Inst.C.E., M.I.M.E. Second Edition, Revised, with large Additions, large crown 8vo, 440 pp., cloth **9/0**

"Mr. Bale is evidently an expert on the subject, and he has collected so much information that his book is all-sufficient for builders and others engaged in the conversion of timber."—*Architect.*

"The most comprehensive compendium of wood-working machinery we have seen. The author is a thorough master of his subject."—*Building News.*

SAW MILLS.

Their Arrangement and Management, and the Economical Conversion of Timber. By M. POWIS BALE, A.M.Inst.C.E. Second Edition, Revised. Crown 8vo, cloth. [*Just Published.* **10/6**

"The *administration* of a large sawing establishment is discussed, and the subject examined from a financial standpoint. Hence the size, shape, order, and disposition of saw mills and the like are gone into in detail, and the course of the timber is traced from its reception to its delivery in its converted state. We could not desire a more complete or practical treatise."—*Builder.*

THE CARPENTER'S GUIDE.

Or, Book of Lines for Carpenters; comprising all the Elementary Principles essential for acquiring a knowledge of Carpentry. Founded on the late PETER NICHOLSON'S standard work. A New Edition, Revised by ARTHUR ASHPITEL, F.S.A. Together with Practical Rules on Drawing, by GEORGE PYNE. With 74 Plates, 4to, cloth . . . . . **£1 1s.**

A PRACTICAL TREATISE ON HANDRAILING.

Showing New and Simple Methods for Finding the Pitch of the Plank, Drawing the Moulds, Bevelling, Jointing-up, and Squaring the Wreath. By GEORGE COLLINGS. Second Edition, Revised and Enlarged, to which is added A TREATISE ON STAIR-BUILDING. With Plates and Diagrams . . **2/6**

"Will be found of practical utility in the execution of this difficult branch of joinery."—*Builder.*

"Almost every difficult phase of this somewhat intricate branch of joinery is elucidated by the aid of plates and explanatory letterpress."—*Furniture Gazette.*

CIRCULAR WORK IN CARPENTRY AND JOINERY.

A Practical Treatise on Circular Work of Single and Double Curvature. By GEORGE COLLINGS. With Diagrams. Third Edition, 12mo, cloth . **2/6**

"An excellent example of what a book of this kind should be. Cheap in price, clear in definition, and practical in the examples selected."—*Builder.*

THE CABINET-MAKER'S GUIDE TO THE ENTIRE CONSTRUCTION OF CABINET WORK.

By RICHARD BITMEAD. Illustrated with Plans, Sections and Working Drawings. Crown 8vo, cloth. [*Just Published.* **2/6**

HANDRAILING COMPLETE IN EIGHT LESSONS.

On the Square-Cut System. By J. S. GOLDTHORP, Head of Building Department, Halifax Technical School. With Eight Plates and over 150 Practical Exercises. 4to, cloth **3/6**

"Likely to be of considerable value to joiners and others who take a pride in good work. The arrangement of the book is excellent. We heartily commend it to teachers and students."—*Timber Trades Journal.*

TIMBER MERCHANT'S and BUILDER'S COMPANION.

Containing New and Copious Tables of the Reduced Weight and Measurement of Deals and Battens, of all sizes, from One to a Thousand Pieces, and the relative Price that each size bears per Lineal Foot to any given Price per Petersburgh Standard Hundred; the Price per Cube Foot of Square Timber to any given Price per Load of 50 Feet, &c., &c. By WILLIAM DOWSING. Fourth Edition, Revised and Corrected. Crown 8vo, cloth . . . **3/0**

"We are glad to see a fourth edition of these admirable tables, which for correctness and simplicity of arrangement leave nothing to be desired."—*Timber Trades Journal.*

THE PRACTICAL TIMBER MERCHANT.

A Guide for the Use of Building Contractors, Surveyors, Builders, &c., comprising useful Tables for all purposes connected with the Timber Trade, Marks of Wood, Essay on the Strength of Timber, Remarks on the Growth of Timber, &c. By W. RICHARDSON. Second Edition. Fcap. 8vo, cloth . **3/6**

"Contains much valuable information for timber merchants, builders, foresters, and all others connected with the growth, sale, and manufacture of timber."—*Journal of Forestry.*

PACKING-CASE TABLES.

Showing the number of Superficial Feet in Boxes or Packing-Cases, from six inches square and upwards. By W. RICHARDSON, Timber Broker. Third Edition. Oblong 4to, cloth **3/6**

"Invaluable labour-saving tables."—*Ironmonger.*

GUIDE TO SUPERFICIAL MEASUREMENT.

Tables calculated from 1 to 200 inches in length by 1 to 108 inches in breadth. For the use of Architects, Surveyors, Engineers, Timber Merchants, Builders, &c. By JAMES HAWKINGS. Fourth Edition. Fcap., cloth. **3/6**

"A useful collection of tables to facilitate rapid calculation of surfaces. The exact area of any surface of which the limits have been ascertained can be instantly determined. The book will be found of the greatest utility to all engaged in building operations."—*Scotsman.*

PRACTICAL FORESTRY.

And its Bearing on the Improvement of Estates. By CHARLES E. CURTIS, F.S.I., Professor of Forestry, Field Engineering, and General Estate Management, at the College of Agriculture, Downton. Second Edition, Revised. Crown 8vo, cloth. [*Just Published.* **3/6**

SUMMARY OF CONTENTS:—PREFATORY REMARKS.—OBJECTS OF PLANTING.—CHOICE OF A FORESTER.—CHOICE OF SOIL AND SITE.—LAYING OUT OF LAND FOR PLANTATIONS.—PREPARATION OF THE GROUND FOR PLANTING.—DRAINAGE.—PLANTING.—DISTANCES AND DISTRIBUTION OF TREES IN PLANTATIONS.—TREES AND GROUND GAME.—ATTENTION AFTER PLANTING.—THINNING OF PLANTATIONS—PRUNING OF FOREST TREES.—REALIZATION.—METHODS OF SALE.—MEASUREMENT OF TIMBER.—MEASUREMENT AND VALUATION OF LARCH PLANTATION.—FIRE LINES.—COST OF PLANTING.

"Mr. Curtis has in the course of a series of short pithy chapters afforded much information of a useful and practical character on the planting and subsequent treatment of trees."—*Illustrated Carpenter and Builder.*

THE ELEMENTS OF FORESTRY.

Designed to afford Information concerning the Planting and Care of Forest Trees for Ornament or Profit, with suggestions upon the Creation and Care of Woodlands. By F. B. HOUGH. Large crown 8vo, cloth . . . **10/0**

THE TIMBER IMPORTER'S, TIMBER MERCHANT'S, AND BUILDER'S STANDARD GUIDE.

By RICHARD E. GRANDY. Comprising:—An Analysis of Deal Standards, Home and Foreign, with Comparative Values and Tabular Arrangements for fixing Net Landed Cost on Baltic and North American Deals, including all intermediate Expenses, Freight, Insurance, &c.; together with copious Information for the Retailer and Builder. Third Edition. 12mo, cloth . . **2/0**

DECORATIVE ARTS, &c.

SCHOOL OF PAINTING FOR THE IMITATION OF WOODS AND MARBLES.

As Taught and Practised by A. R. VAN DER BURG and P. VAN DER BURG, Directors of the Rotterdam Painting Institution. Royal folio, 18½ by 12½ in., Illustrated with 24 full-size Coloured Plates; also 12 plain Plates, comprising 154 Figures. Third Edition, cloth. [*Just Published.* **£1 11s. 6D.**

LIST OF PLATES:—1. VARIOUS TOOLS REQUIRED FOR WOOD PAINTING.—2, 3. WALNUT; PRELIMINARY STAGES OF GRAINING AND FINISHED SPECIMEN.—4. TOOLS USED FOR MARBLE PAINTING AND METHOD OF MANIPULATION.—5, 6. ST. REMI MARBLE; EARLIER OPERATIONS AND FINISHED SPECIMEN. — 7. METHODS OF SKETCHING DIFFERENT GRAINS, KNOTS, &c.—8, 9. ASH: PRELIMINARY STAGES AND FINISHED SPECIMEN.—10. METHODS OF SKETCHING MARBLE GRAINS.—11, 12. BRECHE MARBLE; PRELIMINARY STAGES OF WORKING AND FINISHED SPECIMEN.—13. MAPLE; METHODS OF PRODUCING THE DIFFERENT GRAINS.—14, 15. BIRD'S-EYE MAPLE; PRELIMINARY STAGES AND FINISHED SPECIMEN.—16. METHODS OF SKETCHING THE DIFFERENT SPECIES OF WHITE MARBLE.—17, 18. WHITE MARBLE; PRELIMINARY STAGES OF PROCESS AND FINISHED SPECIMEN.—19. MAHOGANY; SPECIMENS OF VARIOUS GRAINS AND METHODS OF MANIPULATION.—20, 21. MAHOGANY; EARLIER STAGES AND FINISHED SPECIMEN.—22, 23, 24. SIENNA MARBLE; VARIETIES OF GRAIN, PRELIMINARY STAGES AND FINISHED SPECIMEN.—25, 26, 27. JUNIPER WOOD; METHODS OF PRODUCING GRAIN, &c.; PRELIMINARY STAGES AND FINISHED SPECIMEN.—28, 29, 30. VERT DE MER MARBLE; VARIETIES OF GRAIN AND METHODS OF WORKING, UNFINISHED AND FINISHED SPECIMENS.—31, 32, 33. OAK; VARIETIES OF GRAIN, TOOLS EMPLOYED AND METHODS OF MANIPULATION, PRELIMINARY STAGES AND FINISHED SPECIMEN.—34, 35, 36. WAULSORT MARBLE; VARIETIES OF GRAIN, UNFINISHED AND FINISHED SPECIMENS.

"Those who desire to attain skill in the art of painting woods and marbles will find advantage in consulting this book. . . . Some of the Working Men's Clubs should give their young men the opportunity to study it."—*Builder.*

"A comprehensive guide to the art. The explanations of the processes, the manipulation and management of the colours, and the beautifully executed plates will not be the least valuable to the student who aims at making his work a faithful transcript of nature."—*Building News.*

"Students and novices are fortunate who are able to become the possessors of so noble a work."—*The Architect.*

ELEMENTARY DECORATION.

A Guide to the Simpler Forms of Everyday Art. Together with PRACTICAL HOUSE DECORATION. By JAMES W. FACEY. With numerous Illustrations. In One Vol., strongly half-bound **5/0**

HOUSE PAINTING, GRAINING, MARBLING, AND SIGN WRITING.

A Practical Manual of. By ELLIS A. DAVIDSON. Eighth Edition. With Coloured Plates and Wood Engravings. 12mo, cloth boards . . . **6/0**

"A mass of information of use to the amateur and of value to the practical man."—*English Mechanic.*

THE DECORATOR'S ASSISTANT.

A Modern Guide for Decorative Artists and Amateurs, Painters, Writers, Gilders, &c. Containing upwards of 600 Receipts, Rules, and Instructions; with a variety of Information for General Work connected with every Class of Interior and Exterior Decorations, &c. Seventh Edition. 152 pp., cr. 8vo. **1/0**

"Full of receipts of value to decorators, painters, gilders, &c. The book contains the gist of larger treatises on colour and technical processes. It would be difficult to meet with a work so full of varied information on the painter's art."—*Building News.*

MARBLE DECORATION

And the Terminology of British and Foreign Marbles. A Handbook for Students. By GEORGE H. BLAGROVE, Author of "Shoring and its Application," &c. With 28 Illustrations. Crown 8vo, cloth **3/6**

"This most useful and much wanted handbook should be in the hands of every architect and builder."—*Building World.*

A carefully and usefully written treatise; the work is essentially practical."—*Scotsman.*

DELAMOTTE'S WORKS ON ALPHABETS AND ILLUMINATION.

ORNAMENTAL ALPHABETS, ANCIENT & MEDIÆVAL.

From the Eighth Century, with Numerals; including Gothic, Church-Text, large and small, German, Italian, Arabesque, Initials for Illumination, Monograms, Crosses, &c., &c., for the use of Architectural and Engineering Draughtsmen, Missal Painters, Masons, Decorative Painters, Lithographers, Engravers, Carvers, &c., &c. Collected and Engraved by F. DELAMOTTE, and printed in Colours. New and Cheaper Edition. Royal 8vo, oblong, ornamental boards **2/6**

"For those who insert enamelled sentences round gilded chalices, who blazon shop legends over shop-doors, who letter church walls with pithy sentences from the Decalogue, this book will be useful."—*Athenæum.*

MODERN ALPHABETS, PLAIN AND ORNAMENTAL.

Including German, Old English, Saxon, Italic, Perspective, Greek, Hebrew, Court Hand, Engrossing, Tuscan, Riband, Gothic, Rustic, and Arabesque; with several Original Designs, and an Analysis of the Roman and Old English Alphabets, large and small, and Numerals, for the use of Draughtsmen, Surveyors, Masons, Decorative Painters, Lithographers, Engravers, Carvers, &c. Collected and Engraved by F. DELAMOTTE, and printed in Colours. New and Cheaper Edition. Royal 8vo, oblong, ornamental boards . **2/6**

"There is comprised in it every possible shape into which the letters of the alphabet and numerals can be formed, and the talent which has been expended in the conception of the various plain and ornamental letters is wonderful."—*Standard.*

MEDIÆVAL ALPHABETS AND INITIALS FOR ILLUMINATORS.

By F. G. DELAMOTTE. Containing 21 Plates and Illuminated Title, printed in Gold and Colours. With an Introduction by J. WILLIS BROOKS. Fourth and Cheaper Edition. Small 4to, ornamental boards **4/0**

"A volume in which the letters of the alphabet come forth glorified in gilding and all the colours of the prism interwoven and intertwined and intermingled."—*Sun.*

A PRIMER OF THE ART OF ILLUMINATION.

For the Use of Beginners; with a Rudimentary Treatise on the Art, Practical Directions for its Exercise, and Examples taken from Illuminated MSS., printed in Gold and Colours. By F. DELAMOTTE. New and Cheaper Edition. Small 4to, ornamental boards **6/0**

"The examples of ancient MSS. recommended to the student, which, with much good sense, the author chooses from collections accessible to all, are selected with judgment and knowledge as well as taste."—*Athenæum.*

THE EMBROIDERER'S BOOK OF DESIGN.

Containing Initials, Emblems, Cyphers, Monograms, Ornamental Borders, Ecclesiastical Devices, Mediæval and Modern Alphabets, and National Emblems. Collected by F. DELAMOTTE, and printed in Colours. Oblong royal 8vo, ornamental wrapper **1/6**

"The book will be of great assistance to ladies and young children who are endowed with the art of plying the needle in this most ornamental and useful pretty work."—*East Anglian Times.*

INSTRUCTIONS IN WOOD-CARVING FOR AMATEURS.

With Hints on Design. By A LADY. With 10 Plates. New and Cheaper Edition. Crown 8vo, in emblematic wrapper **2/0**

"The handicraft of the wood-carver, so well as a book can impart it, may be learnt from 'A Lady's' publication."—*Athenæum.*

PAINTING POPULARLY EXPLAINED.

By THOMAS JOHN GULLICK, Painter, and JOHN TIMBS, F.S.A. Including Fresco, Oil, Mosaic, Water-Colour, Water-Glass, Tempera, Encaustic, Miniature, Painting on Ivory, Vellum, Pottery, Enamel, Glass, &c. Fifth Edition. Crown 8vo, cloth **5/0**

*** *Adopted as a Prize Book at South Kensington.*

"Much may be learned, even by those who fancy they do not require to be taught, from the careful perusal of this unpretending but comprehensive treatise."—*Art Journal.*

NATURAL SCIENCE, &c.

THE VISIBLE UNIVERSE.

Chapters on the Origin and Construction of the Heavens. By J. E. GORE, F.R.A.S., Author of "Star Groups," &c. Illustrated by 6 Stellar Photographs and 12 Plates. Demy 8vo, cloth **16/0**

"A valuable and lucid summary of recent astronomical theory, rendered more valuable and attractive by a series of stellar photographs and other illustrations."—*The Times.*

"In presenting a clear and concise account of the present state of our knowledge Mr. Gore has made a valuable addition to the literature of the subject."—*Nature.*

"Mr. Gore's 'Visible Universe' is one of the finest works on astronomical science that have recently appeared in our language. In spirit and in method it is scientific from cover to cover, but the style is so clear and attractive that it will be as acceptable and as readable to those who make no scientific pretensions as to those who devote themselves specially to matters astronomical."—*Leeds Mercury.*

STAR GROUPS.

A Student's Guide to the Constellations. By J. ELLARD GORE, F.R.A.S., M.R.I.A., &c., Author of "The Visible Universe," "The Scenery of the Heavens," &c. With 30 Maps. Small 4to, cloth **5/0**

"The volume contains thirty maps showing stars of the sixth magnitude—the usual naked-eye limit—and each is accompanied by a brief commentary adapted to facilitate recognition and bring to notice objects of special interest. For the purpose of a preliminary survey of the 'midnight pomp' of the heavens nothing could be better than a set of delineations averaging scarcely twenty square inches in area and including nothing that cannot at once be identified."—*Saturday Review.*

AN ASTRONOMICAL GLOSSARY.

Or, Dictionary of Terms used in Astronomy. With Tables of Data and Lists of Remarkable and Interesting Celestial Objects. By J. ELLARD GORE, F.R.A.S., Author of "The Visible Universe," &c. Small crown 8vo, cloth. **2/6**

"A very useful little work for beginners in astronomy, and not to be despised by more advanced students."—*The Times.*

"A very handy book . . . the utility of which is much increased by its valuable tables of astronomical data."—*Athenæum.*

THE MICROSCOPE.

Its Construction and Management. Including Technique, Photo-micrography, and the Past and Future of the Microscope. By Dr. HENRI VAN HEURCK. Re-Edited and Augmented from the Fourth French Edition, and Translated by WYNNE E. BAXTER, F.G.S. 400 pp., with upwards of 250 Woodcuts, imp. 8vo, cloth **18/0**

"A translation of a well-known work, at once popular and comprehensive."—*Times.*

"The translation is as felicitous as it is accurate."—*Nature.*

ASTRONOMY.

By the late Rev. ROBERT MAIN, M.A., F.R.S. Third Edition, Revised by WILLIAM THYNNE LYNN, B.A., F.R.A.S., formerly of the Royal Observatory, Greenwich. 12mo, cloth **2/0**

"A sound and simple treatise, very carefully edited, and a capital book for beginners."—*Knowledge.*

"Accurately brought down to the requirements of the present time by Mr. Lynn."—*Educational Times.*

A MANUAL OF THE MOLLUSCA.

A Treatise on Recent and Fossil Shells. By S. P. WOODWARD, A.L.S., F.G.S. With an Appendix on RECENT AND FOSSIL CONCHOLOGICAL DISCOVERIES, by RALPH TATE, A.L.S., F.G.S. With 23 Plates and upwards of 300 Woodcuts. Reprint of Fourth Edition (1880). Crown 8vo, cloth **7/6**

"A most valuable storehouse of conchological and geological information."—*Science Gossip.*

THE TWIN RECORDS OF CREATION.

Or, Geology and Genesis, their Perfect Harmony and Wonderful Concord By G. W. V. LE VAUX. 8vo, cloth **5/0**

"A valuable contribution to the evidences of Revelation, and disposes very conclusively of the arguments of those who would set God's Works against God's Word. No real difficulty is shirked, and no sophistry is left unexposed."—*The Rock.*

HANDBOOK OF MECHANICS.

By Dr. LARDNER. Enlarged and re-written by BENJAMIN LOEWY, F.R.A.S. 378 Illustrations. Post 8vo, cloth **6/0**

"The perspicuity of the original has been retained, and chapters which had become obsolete have been replaced by others of more modern character. The explanations throughout are studiously popular, and care has been taken to show the application of the various branches of physics to the industrial arts, and to the practical business of life."—*Mining Journal.*

HANDBOOK OF HYDROSTATICS AND PNEUMATICS.

By Dr. LARDNER. New Edition, Revised and Enlarged by BENJAMIN LOEWY. F.R.A.S. With 236 Illustrations. Post 8vo, cloth **5/0**

"For those 'who desire to attain an accurate knowledge of physical science without the profound methods of mathematical investigation,' this work is well adapted."—*Chemical News.*

HANDBOOK OF HEAT.

By Dr. LARDNER. Edited and re-written by BENJAMIN LOEWY, F.R.A.S., &c. 117 Illustrations. Post 8vo, cloth **6/0**

"The style is always clear and precise, and conveys instruction without leaving any cloudiness or lurking doubts behind."—*Engineering.*

HANDBOOK OF OPTICS.

By Dr. LARDNER. New Edition. Edited by T. OLVER HARDING, B.A. Lond. With 298 Illustrations. Small 8vo, 448 pp., cloth **5/0**

"Written by one of the ablest English scientific writers, beautifully and elaborately illustrated."—*Mechanics' Magazine.*

ELECTRICITY, MAGNETISM, AND ACOUSTICS.

By Dr. LARDNER. Edited by GEO. CAREY FOSTER, B.A., F.C.S. With 400 Illustrations. Small 8vo, cloth **5/0**

"The book could not have been entrusted to any one better calculated to preserve the terse and lucid style of Lardner, while correcting his errors and bringing up his work to the present state of scientific knowledge."—*Popular Science Review.*

HANDBOOK OF ASTRONOMY.

By Dr. LARDNER. Fourth Edition. Revised and Edited by EDWIN DUNKIN, F.R.A.S., Royal Observatory, Greenwich. With 38 Plates and upwards of 100 Woodcuts. 8vo, cloth **9/6**

"Probably no other book contains the same amount of information in so compendious and well arranged a form—certainly none at the price at which this is offered to the public."—*Athenæum.*

"We can do no other than pronounce this work a most valuable manual of astronomy, and we strongly recommend it to all who wish to acquire a general—but at the same time correct—acquaintance with this sublime science."—*Quarterly Journal of Science.*

MUSEUM OF SCIENCE AND ART.

Edited by Dr. LARDNER. With upwards of 1,200 Engravings on Wood. In Six Double Volumes, **£1 1s.** in a new and elegant cloth binding; or handsomely bound in half-morocco . . . . . **£1 11s. 6d.**

"A cheap and interesting publication, alike informing and attractive. The papers combine subjects of importance and great scientific knowledge, considerable inductive powers, and a popular style of treatment."—*Spectator.*

Separate books formed from the above.

Common Things Explained. 5s.
The Microscope. 2s. cloth.
Popular Geology. 2s. 6d. cloth.
Popular Physics. 2s. 6d. cloth.
Steam and its Uses. 2s. cloth.
Popular Astronomy. 4s. 6d. cloth.
The Bee and White Ants. 2s. cloth.
The Electric Telegraph. 1s. 6d.

NATURAL PHILOSOPHY FOR SCHOOLS.

By Dr. LARDNER. Fcap. 8vo **3/6**

"A very convenient class book for junior students in private schools."—*British Quarterly Review.*

ANIMAL PHYSIOLOGY FOR SCHOOLS.

By Dr. LARDNER. Fcap. 8vo **3/6**

"Clearly written, well arranged, and excellently illustrated."—*Gardener's Chronicle.*

THE ELECTRIC TELEGRAPH.

By Dr. LARDNER. Revised by E. B. BRIGHT, F.R.A.S. Fcap. 8vo. . **2/6**

"One of the most readable books extant on the Electric Telegraph."—*English Mechanic.*

CHEMICAL MANUFACTURES, CHEMISTRY, &c.

THE GAS ENGINEER'S POCKET-BOOK.

Comprising Tables, Notes and Memoranda relating to the Manufacture, Distribution and Use of Coal Gas and the Construction of Gas Works. By H. O'CONNOR, A.M.Inst.C.E. Second Edition, Revised. 470 pp., crown 8vo, fully Illustrated, leather. [*Just Published.* **10/6**

"The book contains a vast amount of information. The author goes consecutively through the engineering details and practical methods involved in each of the different processes or parts of a gas-works. He has certainly succeeded in making a compilation of hard matters of fact absolutely interesting to read."—*Gas World.*

"A useful work of reference for the gas engineer and all interested in lighting or heating by gas, while the analyses of the various descriptions of gas will be of value to the technical chemist. All matter in any way connected with the manufacture and use of gas is dealt with. The book has evidently been carefully compiled, and certainly constitutes a useful addition to gas literature."—*Builder.*

"The volume contains a great quantity of specialised information, compiled, we believe, from trustworthy sources, which should make it of considerable value to those for whom it is specifically produced."—*Engineer.*

LIGHTING BY ACETYLENE

Generators, Burners, and Electric Furnaces. By WILLIAM E. GIBBS, M.E. With 66 Illustrations. Crown 8vo, cloth. [*Just Published.* **7/6**

ENGINEERING CHEMISTRY.

A Practical Treatise for the Use of Analytical Chemists, Engineers, Iron Masters, Iron Founders, Students and others. Comprising Methods of Analysis and Valuation of the Principal Materials used in Engineering Work, with Analyses, Examples and Suggestions. By H. J. PHILLIPS, F.I.C., F.C.S. Second Edition, Enlarged. Crown 8vo, 400 pp., with Illustrations, cloth **10/6**

"In this work the author has rendered no small service to a numerous body of practical men. . . . The analytical methods may be pronounced most satisfactory, being as accurate as the despatch required of engineering chemists permits."—*Chemical News.*

"Full of good things. As a handbook of technical analysis, it is very welcome."—*Builder.*

"The analytical methods given are, as a whole, such as are likely to give rapid and trustworthy results in experienced hands. . . . There is much excellent descriptive matter in the work, the chapter on 'Oils and Lubrication' being specially noticeable in this respect."—*Engineer.*

NITRO-EXPLOSIVES.

A Practical Treatise concerning the Properties, Manufacture, and Analysis of Nitrated Substances, including the Fulminates, Smokeless Powders, and Celluloid. By P. G. SANFORD, F.I.C., Consulting Chemist to the Cotton Powder Company, &c. With Illustrations. Crown 8vo, cloth. [*Just Published.* **9/0**

"Any one having the requisite apparatus and materials could make nitro-glycerine or gun-cotton, to say nothing of other explosives, by the aid of the instructions in this volume. This is one of the very few text-books in which can be found just what is wanted. Mr. Sanford goes through the whole list of explosives commonly used, names any given explosive, and tells us of what it is composed and how it is manufactured. The book is excellent throughout."—*Engineer.*

A HANDBOOK ON MODERN EXPLOSIVES.

A Practical Treatise on the Manufacture and Use of Dynamite, Gun-Cotton, Nitro-Glycerine and other Explosive Compounds, including Collodion-Cotton. With Chapters on Explosives in Practical Application. By M. EISSLER, Mining Engineer and Metallurgical Chemist. Second Edition, Enlarged. With 150 Illustrations. Crown 8vo, cloth. [*Just Published.* **12/6**

"Useful not only to the miner, but also to officers of both services to whom blasting and the use of explosives generally may at any time become a necessary auxiliary."—*Nature.*

DANGEROUS GOODS.

Their Sources and Properties, Modes of Storage and Transport. With Notes and Comments on Accidents arising therefrom, together with the Government and Railway Classifications, Acts of Parliament, &c. A Guide for the Use of Government and Railway Officials, Steamship Owners, Insurance Companies and Manufacturers, and Users of Explosives and Dangerous Goods. By H. JOSHUA PHILLIPS, F.I.C., F.C.S. Crown 8vo, 374 pp., cloth . . **9/0**

"Merits a wide circulation, and an intelligent, appreciative study."—*Chemical News.*

A MANUAL OF THE ALKALI TRADE.

Including the Manufacture of Sulphuric Acid, Sulphate of Soda, and Bleaching Powder. By JOHN LOMAS, Alkali Manufacturer, Newcastle-upon-Tyne and London. 390 pp. of Text. With 232 Illustrations and Working Drawings, Second Edition, with Additions. Super-royal 8vo, cloth . . **£1 10s.**

"This book is written by a manufacturer for manufacturers. The working details of the most approved forms of apparatus are given, and these are accompanied by no less than 232 wood engravings, all of which may be used for the purposes of construction. Every step in the manufacture is very fully described in this manual, and each improvement explained."—*Athenæum.*

"We find not merely a sound and luminous explanation of the chemical principles of the trade, but a notice of numerous matters which have a most important bearing on the successful conduct of alkali works, but which are generally overlooked by even experienced technological authors."—*Chemical Review.*

THE BLOWPIPE IN CHEMISTRY, MINERALOGY, AND GEOLOGY.

Containing all known Methods of Anhydrous Analysis, many Working Examples, and Instructions for Making Apparatus. By Lieut.-Colonel W. A. Ross, R.A., F.G.S. With 120 Illustrations. Second Edition, Enlarged. Crown 8vo, cloth **5/0**

"The student who goes conscientiously through the course of experimentation here laid down will gain a better insight into inorganic chemistry and mineralogy than if he had 'got up' any of the best text-books of the day, and passed any number of examinations in their contents."—*Chemical News.*

THE MANUAL OF COLOURS AND DYE-WARES.

Their Properties, Applications, Valuations, Impurities and Sophistications. For the Use of Dyers, Printers, Drysalters, Brokers, &c. By J. W. SLATER. Second Edition, Revised and greatly Enlarged. Crown 8vo, cloth . **7/6**

"A complete encyclopædia of the *materia tinctoria*. The information given respecting each article is full and precise, and the methods of determining the value of articles such as these, so liable to sophistication, are given with clearness, and are practical as well as valuable."—*Chemist and Druggist.*

"There is no other work which covers precisely the same ground. To students preparing for examinations in dyeing and printing it will prove exceedingly useful."—*Chemical News.*

A HANDY BOOK FOR BREWERS.

Being a Practical Guide to the Art of Brewing and Malting. Embracing the Conclusions of Modern Research which bear upon the Practice of Brewing. By HERBERT EDWARDS WRIGHT, M.A. Second Edition, Enlarged. Crown 8vo, 530 pp., cloth. [*Just Published.* **12/6**

"May be consulted with advantage by the student who is preparing himself for examinational tests, while the scientific brewer will find in it a *résumé* of all the most important discoveries of modern times. The work is written throughout in a clear and concise manner, and the author takes great care to discriminate between vague theories and well-established facts."—*Brewers' Journal.*

"We have great pleasure in recommending this handy book, and have no hesitation in saying that it is one of the best—if not the best—which has yet been written on the subject of beer-brewing in this country; it should have a place on the shelves of every brewer's library."—*Brewers' Guardian.*

"Although the requirements of the student are primarily considered, an acquaintance of half-an-hour's duration cannot fail to impress the practical brewer with the sense of having found a trustworthy guide and practical counsellor in brewery matters."—*Chemical Trade Journal.*

FUELS: SOLID, LIQUID, AND GASEOUS.

Their Analysis and Valuation. For the Use of Chemists and Engineers. By H. J. PHILLIPS, F.C.S., formerly Analytical and Consulting Chemist to the G.E. Rlwy. Third Edition, Revised and Enlarged. Crown 8vo, cloth **2/0**

"Ought to have its place in the laboratory of every metallurgical establishment and wherever fuel is used on a large scale."—*Chemical News.*

THE ARTISTS' MANUAL OF PIGMENTS.

Showing their Composition, Conditions of Permanency, Non-Permanency, and Adulterations; Effects in Combination with Each Other and with Vehicles; and the most Reliable Tests of Purity. By H. C. STANDAGE. Crown 8vo. **2/6**

"This work is indeed *multum-in-parvo*, and we can, with good conscience, recommend it to all who come in contact with pigments, whether as makers, dealers, or users."—*Chemical Review.*

A POCKET-BOOK OF MENSURATION AND GAUGING.

Containing Tables, Rules, and Memoranda for Revenue Officers, Brewers, Spirit Merchants, &c. By J. B. MANT, Inland Revenue. Second Edition, Revised. 18mo, leather **4/0**

"This handy and useful book is adapted to the requirements of the Inland Revenue Department, and will be a favourite book of reference."—*Civilian.*

"Should be in the hands of every practical brewer."—*Brewers' Journal.*

INDUSTRIAL ARTS, TRADES, AND MANUFACTURES.

TEA MACHINERY AND TEA FACTORIES.

A Descriptive Treatise on the Mechanical Appliances required in the Cultivation of the Tea Plant and the Preparation of Tea for the Market. By A. J. WALLIS-TAYLER, A. M. Inst. C.E. Medium 8vo, 468 pp. With 218 Illustrations. [*Just Published. Net* **25/0**

SUMMARY OF CONTENTS:—MECHANICAL CULTIVATION OR TILLAGE OF THE SOIL.—PLUCKING OR GATHERING THE LEAF.—TEA FACTORIES.—THE DRESSING, MANUFACTURE, OR PREPARATION OF TEA BY MECHANICAL MEANS.—ARTIFICIAL WITHERING OF THE LEAF.—MACHINES FOR ROLLING OR CURLING THE LEAF.—FERMENTING PROCESS.—MACHINES FOR THE AUTOMATIC DRYING OR FIRING OF THE LEAF.—MACHINES FOR NON-AUTOMATIC DRYING OR FIRING OF THE LEAF.—DRYING OR FIRING MACHINES.—BREAKING OR CUTTING, AND SORTING MACHINES.—PACKING THE TEA.—MEANS OF TRANSPORT ON TEA PLANTATIONS.—MISCELLANEOUS MACHINERY AND APPARATUS.—FINAL TREATMENT OF THE TEA.—TABLES AND MEMORANDA.

"The subject of tea machinery is now one of the first interest to a large class of people, to whom we strongly commend the volume."—*Chamber of Commerce Journal.*

"When tea planting was first introduced into the British possessions little, if any, machinery was employed, but now its use is almost universal. This volume contains a very full account of the machinery necessary for the proper outfit of a factory, and also a description of the processes best carried out by this machinery."—*Journal Society of Arts.*

FLOUR MANUFACTURE.

A Treatise on Milling Science and Practice. By FRIEDRICH KICK, Imperial Regierungsrath, Professor of Mechanical Technology in the Imperial German Polytechnic Institute, Prague. Translated from the Second Enlarged and Revised Edition with Supplement. By H. H. P. POWLES, Assoc. Memb. Institution of Civil Engineers. Nearly 400 pp. Illustrated with 28 Folding Plates, and 167 Woodcuts. Royal 8vo, cloth . . . . . **£1 5s.**

"This valuable work is, and will remain, the standard authority on the science of milling. . . . The miller who has read and digested this work will have laid the foundation, so to speak, of a successful career; he will have acquired a number of general principles which he can proceed to apply. In this handsome volume we at last have the accepted text-book of modern milling in good, sound English, which has little, if any, trace of the German idiom."—*The Miller.*

COTTON MANUFACTURE.

A Manual of Practical Instruction of the Processes of Opening, Carding, Combing, Drawing, Doubling and Spinning of Cotton, the Methods of Dyeing, &c. For the Use of Operatives Overlookers, and Manufacturers. By JOHN LISTER, Technical Instructor, Pendleton. 8vo, cloth . . **7/6**

"A distinct advance in the literature of cotton manufacture."—*Machinery.*

"It is thoroughly reliable, fulfilling nearly all the requirements desired."—*Glasgow Herald.*

MODERN CYCLES.

A Practical Handbook on their Construction and Repair. By A. J. WALLIS-TAYLER, A. M. Inst. C. E. Author of "Refrigerating Machinery," &c. With upwards of 300 Illustrations. Crown 8vo, cloth. [*Just Published.* **10/6**

"The large trade that is done in the component parts of bicycles has placed in the way of men mechanically inclined extraordinary facilities for building bicycles for their own use. . . . The book will prove a valuable guide for all those who aspire to the manufacture or repair of their own machines."—*The Field.*

"A most comprehensive and up-to-date treatise."—*The Cycle.*

"A very useful book, which is quite entitled to rank as a standard work for students of cycle construction. —*Wheeling.*

CEMENTS, PASTES, GLUES, AND GUMS.

A Practical Guide to the Manufacture and Application of the various Agglutinants required in the Building, Metal-Working, Wood-Working, and Leather-Working Trades, and for Workshop, Laboratory or Office Use. With upwards of 900 Recipes and Formulæ. By H. C. STANDAGE, Chemist. Third Edition. Crown 8vo, cloth. [*Just Published.* **2/0**

"We have pleasure in speaking favourably of this volume. So far as we have had experience, which is not inconsiderable, this manual is trustworthy."—*Athenæum.*

"As a revelation of what are considered trade secrets, this book will arouse an amount of curiosity among the large number of industries it touches."—*Daily Chronicle.*

THE ART OF SOAP-MAKING.

A Practical Handbook of the Manufacture of Hard and Soft Soaps, Toilet Soaps, &c. Including many New Processes, and a Chapter on the Recovery of Glycerine from Waste Leys. By ALX. WATT. Sixth Edition, including an Appendix on Modern Candlemaking. Crown 8vo, cloth. [*Just Published.* **7/6**

"The work will prove very useful, not merely to the technological student, but to the practical soap boiler who wishes to understand the theory of his art."—*Chemical News.*

"A thoroughly practical treatise on an art which has almost no literature in our language. We congratulate the author on the success of his endeavour to fill a void in English technical literature."—*Nature.*

PRACTICAL PAPER-MAKING.

A Manual for Paper-Makers and Owners and Managers of Paper-Mills. With Tables, Calculations, &c. By G. CLAPPERTON, Paper-Maker. With Illustrations of Fibres from Micro-Photographs. Crown 8vo, cloth . . **5/0**

"The author caters for the requirements of responsible mill hands, apprentices, &c., whilst his manual will be found of great service to students of technology, as well as to veteran paper-makers and mill owners. The illustrations form an excellent feature."—*The World's Paper Trade Review.*

"We recommend everybody interested in the trade to get a copy of this thoroughly practical book."—*Paper Making.*

THE ART OF PAPER-MAKING.

A Practical Handbook of the Manufacture of Paper from Rags, Esparto, Straw, and other Fibrous Materials. Including the Manufacture of Pulp from Wood Fibre, with a Description of the Machinery and Appliances used. To which are added Details of Processes for Recovering Soda from Waste Liquors. By ALEXANDER WATT, Author of "The Art of Soap-Making." With Illustrations. Crown 8vo, cloth **7/6**

"It may be regarded as the standard work on the subject. The book is full of valuable information. The 'Art of Paper-Making' is in every respect a model of a text-book, either for a technical class, or for the private student."—*Paper and Printing Trades Journal.*

A TREATISE ON PAPER.

For Printers and Stationers. With an Outline of Paper Manufacture; Complete Tables of Sizes, and Specimens of Different Kinds of Paper. By RICHARD PARKINSON, late of the Manchester Technical School. Demy 8vo, cloth. [*Just Published.* **3/6**

THE ART OF LEATHER MANUFACTURE.

Being a Practical Handbook, in which the Operations of Tanning, Currying, and Leather Dressing are fully Described, and the Principles of Tanning Explained, and many Recent Processes Introduced; as also Methods for the Estimation of Tannin, and a Description of the Arts of Glue Boiling, Gut Dressing, &c. By ALEXANDER WATT, Author of "Soap-Making," &c. Fourth Edition. Crown 8vo, cloth **9/0**

"A sound, comprehensive treatise on tanning and its accessories. The book is an eminently valuable production, which redounds to the credit of both author and publishers."—*Chemical Review.*

THE ART OF BOOT AND SHOE MAKING.

A Practical Handbook, including Measurement, Last-Fitting, Cutting-Out, Closing and Making, with a Description of the most approved Machinery Employed. By JOHN B. LENO, late Editor of *St. Crispin*, and *The Boot and Shoe-Maker.* 12mo, cloth. **2/0**

WOOD ENGRAVING.

A Practical and Easy Introduction to the Study of the Art. By W. N. BROWN. 12mo, cloth **1/6**

"The book is clear and complete, and will be useful to any one wanting to understand the first elements of the beautiful art of wood engraving."—*Graphic.*

MODERN HOROLOGY, IN THEORY AND PRACTICE.

Translated from the French of CLAUDIUS SAUNIER, ex-Director of the School of Horology at Macon, by JULIEN TRIPPLIN, F.R.A.S., Besancon Watch Manufacturer, and EDWARD RIGG, M.A., Assayer in the Royal Mint. With Seventy-eight Woodcuts and Twenty-two Coloured Copper Plates. Second Edition. Super-royal 8vo, cloth, **£2 2s.**; half-calf . . . **£2 10s.**

"There is no horological work in the English language at all to be compared to this production of M. Saunier's for clearness and completeness. It is alike good as a guide for the student and as a reference for the experienced horologist and skilled workman."—*Horological Journal.*

"The latest, the most complete, and the most reliable of those literary productions to which continental watchmakers are indebted for the mechanical superiority over their English brethren—in fact, the Book of Books, is M. Saunier's 'Treatise.'"—*Watchmaker, Jeweller, and Silversmith.*

THE WATCH ADJUSTER'S MANUAL.

A Practical Guide for the Watch and Chronometer Adjuster in Making, Springing, Timing and Adjusting for Isochronism, Positions and Temperatures. By C. E. FRITTS. 370 pp., with Illustrations, 8vo, cloth . . . **16/0**

THE WATCHMAKER'S HANDBOOK.

Intended as a Workshop Companion for those engaged in Watchmaking and the Allied Mechanical Arts. Translated from the French of CLAUDIUS SAUNIER, and enlarged by JULIEN TRIPPLIN, F.R.A.S., and EDWARD RIGG, M.A., Assayer in the Royal Mint. Third Edition. 8vo, cloth. **9/0**

"Each part is truly a treatise in itself. The arrangement is good and the language is clear and concise. It is an admirable guide for the young watchmaker."—*Engineering.*

"It is impossible to speak too highly of its excellence. It fulfils every requirement in a handbook intended for the use of a workman. Should be found in every workshop."—*Watch and Clockmaker.*

A HISTORY OF WATCHES & OTHER TIMEKEEPERS.

By JAMES F. KENDAL, M.B.H. Inst. Boards, **1/6**; or cloth, gilt . **2/6**

"The best which has yet appeared on this subject in the English language."—*Industries.*

"Open the book where you may, there is interesting matter in it concerning the ingenious devices of the ancient or modern horologer."—*Saturday Review.*

ELECTRO-DEPOSITION.

A Practical Treatise on the Electrolysis of Gold, Silver, Copper, Nickel, and other Metals and Alloys. With Descriptions of Voltaic Batteries, Magneto and Dynamo-Electric Machines, Thermopiles, and of the Materials and Processes used in every Department of the Art, and several Chapters on ELECTRO-METALLURGY. By ALEXANDER WATT, Author of "Electro-Metallurgy," &c. Third Edition, Revised. Crown 8vo, cloth . . **9/0**

"Eminently a book for the practical worker in electro-deposition. It contains practical descriptions of methods, processes and materials, as actually pursued and used in the workshop."—*Engineer.*

ELECTRO-METALLURGY.

Practically Treated. By ALEXANDER WATT. Tenth Edition, including the most recent Processes. 12mo, cloth **3/6**

"From this book both amateur and artisan may learn everything necessary for the successful prosecution of electroplating."—*Iron.*

JEWELLER'S ASSISTANT IN WORKING IN GOLD.

A Practical Treatise for Masters and Workmen, Compiled from the Experience of Thirty Years' Workshop Practice. By GEORGE E. GEE, Author of "The Goldsmith's Handbook," &c. Crown 8vo, cloth **7/6**

"This manual of technical education is apparently destined to be a valuable auxiliary to a handicraft which is certainly capable of great improvement."—*The Times.*

ELECTROPLATING.

A Practical Handbook on the Deposition of Copper, Silver, Nickel, Gold, Aluminium, Brass, Platinum, &c., &c. By J. W. URQUHART, C.E. Fourth Edition, Revised. Crown 8vo, cloth. [*Just Published.* **5/0**

"An excellent practical manual."—*Engineering.*

"An excellent work, giving the newest information."—*Horological Journal.*

ELECTROTYPING.

The Reproduction and Multiplication of Printing Surfaces and Works of Art by the Electro-Deposition of Metals. By J. W. URQUHART, C.E. Crown 8vo, cloth **5/0**

"The book is thoroughly practical; the reader is, therefore, conducted through the leading laws of electricity, then through the metals used by electrotypers, the apparatus, and the depositing processes, up to the final preparation of the work."—*Art Journal.*

GOLDSMITH'S HANDBOOK.

By GEORGE E. GEE, Jeweller, &c. Fifth Edition. 12mo, cloth . . **3/0**

"A good, sound educator, and will be generally accepted as an authority."—*Horological Journal.*

SILVERSMITH'S HANDBOOK.

By GEORGE E. GEE, Jeweller, &c. Third Edition, with numerous Illustrations. 12mo, cloth **3/0**

"The chief merit of the work is its practical character. . . . The workers in the trade will speedily discover its merits when they sit down to study it."—*English Mechanic.*

*** *The above two works together, strongly half-bound, price 7s.*

SHEET METAL WORKER'S INSTRUCTOR.

Comprising a Selection of Geometrical Problems and Practical Rules for Describing the Various Patterns Required by Zinc, Sheet-Iron, Copper, and Tin-Plate Workers. By REUBEN HENRY WARN. New Edition, Revised and greatly Enlarged by JOSEPH G. HORNER, A.M.I.M.E. Crown 8vo, 254 pp., with 430 Illustrations, cloth. [*Just Published.* **7/6**

BREAD & BISCUIT BAKER'S & SUGAR-BOILER'S ASSISTANT.

Including a large variety of Modern Recipes. With Remarks on the Art of Bread-making. By ROBERT WELLS. Third Edition. Crown 8vo, cloth . **2/0**

"A large number of wrinkles for the ordinary cook, as well as the baker."—*Saturday Review.*

PASTRYCOOK & CONFECTIONER'S GUIDE.

For Hotels, Restaurants, and the Trade in general, adapted also for Family Use. By R. WELLS, Author of "The Bread and Biscuit Baker." Crown 8vo, cloth **2/0**

"We cannot speak too highly of this really excellent work. In these days of keen competition our readers cannot do better than purchase this book."—*Bakers' Times.*

ORNAMENTAL CONFECTIONERY.

A Guide for Bakers, Confectioners and Pastrycooks; including a variety of Modern Recipes, and Remarks on Decorative and Coloured Work. With 129 Original Designs. By ROBERT WELLS. Second Edition. Crown 8vo . **5/0**

"A valuable work, practical, and should be in the hands of every baker and confectioner. The illustrative designs are alone worth treble the amount charged for the whole work."—*Bakers' Times.*

THE MODERN FLOUR CONFECTIONER, WHOLESALE AND RETAIL.

Containing a large Collection of Recipes or Cheap Cakes, Biscuits, &c. With remarks on the Ingredients Used in their Manufacture. By ROBERT WELLS, Author of "The Bread and Biscuit Baker," &c. Crown 8vo, cloth . **2/0**

"The work is of a decidedly practical character, and in every recipe regard is had to economical working."—*North British Daily Mail.*

RUBBER HAND STAMPS

And the Manipulation of Rubber. A Practical Treatise on the Manufacture of Indiarubber Hand Stamps, Small Articles of Indiarubber, The Hektograph, Special Inks, Cements, and Allied Subjects. By T. O'CONOR SLOANE, A.M., Ph.D. With numerous Illustrations. Square 8vo, cloth . . . **5/0**

HANDYBOOKS FOR HANDICRAFTS.

BY PAUL N. HASLUCK.

Editor of "Work" (New Series), Author of "Lathe Work," "Milling Machines," &c.
Crown 8vo, 144 pp., price 1s. each.

These HANDYBOOKS *have been written to supply information for* WORKMEN, STUDENTS, *and* AMATEURS *in the several Handicrafts, on the actual* PRACTICE *of the* WORKSHOP, *and are intended to convey in plain language* TECHNICAL KNOWLEDGE *of the several* CRAFTS. *In describing the processes employed, and the manipulation of material, workshop terms are used; workshop practice is fully explained; and the text is freely illustrated with drawings of modern tools, appliances, and processes.*

THE METAL TURNER'S HANDYBOOK.

A Practical Manual for Workers at the Foot-Lathe. With over 100 Illustrations 1/0

"The book will be of service alike to the amateur and the artisan turner. It displays thorough knowledge of the subject."—*Scotsman.*

THE WOOD TURNER'S HANDYBOOK.

A Practical Manual for Workers at the Lathe. With over 100 Illustrations. 1/0

"We recommend the book to young turners and amateurs. A multitude of workmen have hitherto sought in vain for a manual of this special industry."—*Mechanical World.*

THE WATCH JOBBER'S HANDYBOOK.

A Practical Manual on Cleaning, Repairing, and Adjusting. With upwards of 100 Illustrations 1/0

"We strongly advise all young persons connected with the watch trade to acquire and study this inexpensive work."—*Clerkenwell Chronicle.*

THE PATTERN MAKER'S HANDYBOOK.

A Practical Manual on the Construction of Patterns for Founders. With upwards of 100 Illustrations 1/0

"A most valuable, if not indispensable manual for the pattern maker."—*Knowledge.*

THE MECHANIC'S WORKSHOP HANDYBOOK.

A Practical Manual on Mechanical Manipulation, embracing Information on various Handicraft Processes. With Useful Notes and Miscellaneous Memoranda. Comprising about 200 Subjects 1/0

"A very clever and useful book, which should be found in every workshop; and it should certainly find a place in all technical schools."—*Saturday Review.*

THE MODEL ENGINEER'S HANDYBOOK.

A Practical Manual on the Construction of Model Steam Engines. With upwards of 100 Illustrations. 1/0

"Mr. Hasluck has produced a very good little book."—*Builder.*

THE CLOCK JOBBER'S HANDYBOOK.

A Practical Manual on Cleaning, Repairing, and Adjusting. With upwards of 100 Illustrations 1/0

"It is of inestimable service to those commencing the trade."—*Coventry Standard.*

THE CABINET MAKER'S HANDYBOOK.

A Practical Manual on the Tools, Materials, Appliances, and Processes employed in Cabinet Work. With upwards of 100 Illustrations . . 1/0

"Mr. Hasluck's thorough-going little Handybook is amongst the most practical guides we have seen for beginners in cabinet-work."—*Saturday Review.*

THE WOODWORKER'S HANDYBOOK OF MANUAL INSTRUCTION.

Embracing Information on the Tools, Materials, Appliances and Processes Employed in Woodworking. With 104 Illustrations. 1/0

OPINIONS OF THE PRESS.

"Written by a man who knows, not only how work ought to be done, but how to do it, and how to convey his knowledge to others."—*Engineering.*

"Mr. Hasluck writes admirably, and gives complete instructions."—*Engineer.*

"Mr. Hasluck combines the experience of a practical teacher with the manipulative skill and scientific knowledge of processes of the trained mechanician, and the manuals are marvels of what can be produced at a popular price."—*Schoolmaster.*

"Helpful to workmen of all ages and degrees of experience."—*Daily Chronicle.*

"Practical, sensible, and remarkably cheap."—*Journal of Education.*

"Concise, clear, and practical."—*Saturday Review.*

COMMERCE, COUNTING-HOUSE WORK, TABLES, &c.

LESSONS IN COMMERCE.

By Professor R. GAMBARO, of the Royal High Commercial School at Genoa. Edited and Revised by JAMES GAULT, Professor of Commerce and Commercial Law in King's College, London. Second Edition, Revised. Crown 8vo . **3/6**

"The publishers of this work have rendered considerable service to the cause of commercial education by the opportune production of this volume. . . . The work is peculiarly acceptable to English readers and an admirable addition to existing class books. In a phrase, we think the work attains its object in furnishing a brief account of those laws and customs of British trade with which the commercial man interested therein should be familiar."—*Chamber of Commerce Journal.*

"An invaluable guide in the hands of those who are preparing for a commercial career, and in fact, the information it contains on matters of business should be impressed on every one."—*Counting House.*

THE FOREIGN COMMERCIAL CORRESPONDENT.

Being Aids to Commercial Correspondence in Five Languages—English, French, German, Italian, and Spanish. By CONRAD E. BAKER. Third Edition, Carefully Revised Throughout. Crown 8vo, cloth.
[*Just Published.* **4/6**

"Whoever wishes to correspond in all the languages mentioned by Mr. Baker cannot do better than study this work, the materials of which are excellent and conveniently arranged. They consist not of entire specimen letters, but—what are far more useful—short passages, sentences, or phrases expressing the same general idea in various forms."—*Athenæum.*

"A careful examination has convinced us that it is unusually complete, well arranged and reliable. The book is a thoroughly good one."—*Schoolmaster.*

FACTORY ACCOUNTS: their PRINCIPLES & PRACTICE.

A Handbook for Accountants and Manufacturers, with Appendices on the Nomenclature of Machine Details; the Income Tax Acts; the Rating of Factories; Fire and Boiler Insurance; the Factory and Workshop Acts, &c., including also a Glossary of Terms and a large number of Specimen Rulings. By EMILE GARCKE and J. M. FELLS. Fourth Edition, Revised and Enlarged. Demy 8vo, 250 pp., strongly bound **6/0**

"A very interesting description of the requirements of Factory Accounts. . . . The principle of assimilating the Factory Accounts to the general commercial books is one which we thoroughly agree with."—*Accountants' Journal.*

"Characterised by extreme thoroughness. There are few owners of factories who would not derive great benefit from the perusal of this most admirable work."—*Local Government Chronicle.*

MODERN METROLOGY.

A Manual of the Metrical Units and Systems of the present Century. With an Appendix containing a proposed English System. By LOWIS D. A. JACKSON, A. M. Inst. C. E., Author of "Aid to Survey Practice," &c. Large crown 8vo, cloth **12/6**

"We recommend the work to all interested in the practical reform of our weights and measures."—*Nature.*

A SERIES OF METRIC TABLES.

In which the British Standard Measures and Weights are compared with those of the Metric System at present in Use on the Continent. By C. H. DOWLING, C.E. 8vo, strongly bound **10/6**

"Mr. Dowling's Tables are well put together as a ready reckoner for the conversion of one system into the other."—*Athenæum.*

THE IRON AND METAL TRADES' COMPANION.

For Expeditiously Ascertaining the Value of any Goods bought or sold by Weight, from 1s. per cwt. to 112s. per cwt., and from one farthing per pound to one shilling per pound. By THOMAS DOWNIE. 396 pp., leather . . **9/0**

"A most useful set of tables, nothing like them before existed."—*Building News.*

"Although specially adapted to the iron and metal trades, the tables will be found useful in every other business in which merchandise is bought and sold by weight."—*Railway News.*

NUMBER, WEIGHT, AND FRACTIONAL CALCULATOR.

Containing upwards of 250,000 Separate Calculations, showing at a Glance the Value at 422 Different Rates, ranging from $\frac{1}{144}$th of a Penny to 20s. each, or per cwt., and £20 per ton, of any number of articles consecutively, from 1 to 470. Any number of cwts., qrs., and lbs., from 1 cwt. to 470 cwts. Any number of tons, cwts., qrs., and lbs., from 1 to 1,000 tons. By WILLIAM CHADWICK, Public Accountant. Third Edition, Revised. 8vo, strongly bound . **18/0**

"It is as easy of reference for any answer or any number of answers as a dictionary. For making up accounts or estimates the book must prove invaluable to all who have any considerable quantity of calculations involving price and measure in any combination to do."—*Engineer.*

"The most perfect work of the kind yet prepared."—*Glasgow Herald.*

THE WEIGHT CALCULATOR.

Being a Series of Tables upon a New and Comprehensive Plan, exhibiting at one Reference the exact Value of any Weight from 1 lb. to 15 tons, at 300 Progressive Rates, from 1*d.* to 168s. per cwt., and containing 186,000 Direct Answers, which, with their Combinations, consisting of a single addition (mostly to be performed at sight), will afford an aggregate of 10,266,000 Answers; the whole being calculated and designed to ensure correctness and promote despatch. By HENRY HARBEN, Accountant. Fifth Edition, carefully Corrected. Royal 8vo, strongly half-bound . . . . . **£1 5s.**

"A practical and useful work of reference for men of business generally."—*Ironmonger.*

"Of priceless value to business men. It is a necessary book in all mercantile offices."—*Sheffield Independent.*

THE DISCOUNT GUIDE.

Comprising several Series of Tables for the Use of Merchants, Manufacturers, Ironmongers, and Others, by which may be ascertained the Exact Profit arising from any mode of using Discounts, either in the Purchase or Sale of Goods, and the method of either Altering a Rate of Discount, or Advancing a Price, so as to produce, by one operation, a sum that will realise any required Profit after allowing one or more Discounts: to which are added Tables of Profit or Advance from $1\frac{1}{2}$ to 90 per cent., Tables of Discount from $1\frac{1}{2}$ to $98\frac{1}{2}$ per cent., and Tables of Commission, &c., from $\frac{1}{8}$ to 10 per cent. By HENRY HARBEN, Accountant. New Edition, Corrected. Demy 8vo, half-bound . **£1 5s.**

"A book such as this can only be appreciated by business men, to whom the saving of time means saving of money. The work must prove of great value to merchants, manufacturers, and general traders."—*British Trade Journal.*

TABLES OF WAGES.

At 54, 52, 50 and 48 Hours per Week. Showing the Amounts of Wages from One quarter of an hour to Sixty-four hours, in each case at Rates of Wages advancing by One Shilling from 4s. to 55s. per week. By THOS. GARBUTT, Accountant. Square crown 8vo, half-bound **6/0**

IRON-PLATE WEIGHT TABLES.

For Iron Shipbuilders, Engineers, and Iron Merchants. Containing the Calculated Weights of upwards of 150,000 different sizes of Iron Plates from 1 foot by 6 in. by $\frac{1}{4}$ in. to 10 feet by 5 feet by 1 in. Worked out on the Basis of 40 lbs. to the square foot of Iron of 1 inch in thickness. By H. BURLINSON and W. H. SIMPSON. 4to, half-bound . . . . . **£1 5s.**

MATHEMATICAL TABLES (ACTUARIAL).

Comprising Commutation and Conversion Tables, Logarithms, Cologarithms, Antilogarithms and Reciprocals. By J. W. GORDON. Royal 8vo, mounted on canvas, in cloth case. [*Just Published.* **5/0**

AGRICULTURE, FARMING, GARDENING, &c.

THE COMPLETE GRAZIER AND FARMER'S AND CATTLE BREEDER'S ASSISTANT.

A Compendium of Husbandry. Originally Written by WILLIAM YOUATT. Fourteenth Edition, entirely Re-written, considerably Enlarged, and brought up to Present Requirements, by WILLIAM FREAM, LL.D., Assistant Commissioner, Royal Commission on Agriculture, 1893, Author of "The Elements of Agriculture," &c. Royal 8vo, 1,100 pp., with over 450 Illustrations, handsomely bound. [*Just Published.* **£1 11s. 6D.**

SUMMARY OF CONTENTS.

BOOK I. ON THE VARIETIES, BREEDING, REARING, FATTENING AND MANAGEMENT OF CATTLE.
BOOK II. ON THE ECONOMY AND MANAGEMENT OF THE DAIRY.
BOOK III. ON THE BREEDING, REARING, AND MANAGEMENT OF HORSES.
BOOK IV. ON THE BREEDING, REARING, AND FATTENING OF SHEEP.
BOOK V. ON THE BREEDING, REARING, AND FATTENING OF SWINE.
BOOK VI. ON THE DISEASES OF LIVE STOCK.
BOOK VII. ON THE BREEDING, REARING, AND MANAGEMENT OF POULTRY.
BOOK VIII. ON FARM OFFICES AND IMPLEMENTS OF HUSBANDRY.
BOOK IX. ON THE CULTURE AND MANAGEMENT OF GRASS LANDS.
BOOK X. ON THE CULTIVATION AND APPLICATION OF GRASSES, PULSE AND ROOTS.
BOOK XI. ON MANURES AND THEIR APPLICATION TO GRASS LAND AND CROPS.
BOOK XII. MONTHLY CALENDARS OF FARMWORK.

*** OPINIONS OF THE PRESS ON THE NEW EDITION.

"Dr. Fream is to be congratulated on the successful attempt he has made to give us a work which will at once become the standard classic of the farm practice of the country. We believe that it will be found that it has no compeer among the many works at present in existence. . . . The illustrations are admirable, while the frontispiece, which represents the well-known bull, New Year's Gift, owned by the Queen, is a work of art."—*The Times.*

"The book must be recognised as occupying the proud position of the most exhaustive work of reference in the English language on the subject with which it deals."—*Athenæum.*

"The most comprehensive guide to modern farm practice that exists in the English language to-day. . . . The book is one that ought to be on every farm and in the library of every land owner."—*Mark Lane Express.*

"In point of exhaustiveness and accuracy the work will certainly hold a pre-eminent and unique position among books dealing with scientific agricultural practice. It is, in fact, an agricultural library of itself."—*North British Agriculturist.*

"A compendium of authoritative and well-ordered knowledge on every conceivable branch of the work of the live stock farmer; probably without an equal in this or any other country."—*Yorkshire Post.*

FARM LIVE STOCK OF GREAT BRITAIN.

BY ROBERT WALLACE, F.L.S., F.R.S.E., &c., Professor of Agriculture and Rural Economy in the University of Edinburgh. Third Edition, thoroughly Revised and considerably Enlarged. With over 120 Phototypes of Prize Stock. Demy 8vo, 384 pp., with 79 Plates and Maps, cloth. . . **12/6**

"A really complete work on the history, breeds, and management of the farm stock of Great Britain, and one which is likely to find its way to the shelves of every country gentleman's library."—*The Times.*

"The latest edition of 'Farm Live Stock of Great Britain' is a production to be proud of, and its issue not the least of the services which its author has rendered to agricultural science."—*Scottish Farmer.*

"The book is very attractive, . . . and we can scarcely imagine the existence of a farmer who would not like to have a copy of this beautiful and useful work."—*Mark Lane Express.*

NOTE-BOOK OF AGRICULTURAL FACTS & FIGURES FOR FARMERS AND FARM STUDENTS.

By PRIMROSE MCCONNELL, B.Sc., Fellow of the Highland and Agricultural Society, Author of "Elements of Farming." Sixth Edition, Re-written, Revised, and greatly Enlarged. Fcap. 8vo, 480 pp., leather. [*Just Published.* **6/0**

SUMMARY OF CONTENTS: SURVEYING AND LEVELLING.—WEIGHTS AND MEASURES.—MACHINERY AND BUILDINGS.—LABOUR.—OPERATIONS.—DRAINING.—EMBANKING.—GEOLOGICAL MEMORANDA.—SOILS.—MANURES.—CROPPING.—CROPS.—ROTATIONS.—WEEDS.—FEEDING.—DAIRYING.—LIVE STOCK.—HORSES.—CATTLE.—SHEEP.—PIGS.—POULTRY.—FORESTRY.—HORTICULTURE.—MISCELLANEOUS.

"No farmer, and certainly no agricultural student, ought to be without this *multum-in-parvo* manual of all subjects connected with the farm."—*North British Agriculturist.*

"This little pocket-book contains a large amount of useful information upon all kinds of agricultural subjects. Something of the kind has long been wanted."—*Mark Lane Express.*

"The amount of information it contains is most surprising; the arrangement of the matter is so methodical—although so compressed—as to be intelligible to everyone who takes a glance through its pages. They teem with information."—*Farm and Home.*

BRITISH DAIRYING.

A Handy Volume on the Work of the Dairy-Farm. For the Use of Technical Instruction Classes, Students in Agricultural Colleges and the Working Dairy-Farmer. By Prof. J. P. SHELDON. With Illustrations. Second Edition, Revised. Crown 8vo, cloth. [*Just Published.* **2/6**

"Confidently recommended as a useful text-book on dairy farming."—*Agricultural Gazette.*

"Probably the best half-crown manual on dairy work that has yet been produced."—*North British Agriculturist.*

"It is the soundest little work we have yet seen on the subject."—*The Times.*

MILK, CHEESE, AND BUTTER.

A Practical Handbook on their Properties and the Processes of their Production. Including a Chapter on Cream and the Methods of its Separation from Milk. By JOHN OLIVER, late Principal of the Western Dairy Institute, Berkeley. With Coloured Plates and 200 Illustrations. Crown 8vo, cloth. **7/6**

"An exhaustive and masterly production. It may be cordially recommended to all students and practitioners of dairy science."—*North British Agriculturist.*

"We recommend this very comprehensive and carefully-written book to dairy-farmers and students of dairying. It is a distinct acquisition to the library of the agriculturist. —*Agricultural Gazette.*

SYSTEMATIC SMALL FARMING.

Or, The Lessons of My Farm. Being an Introduction to Modern Farm Practice for Small Farmers. By R. SCOTT BURN, Author of "Outlines of Modern Farming," &c. Crown 8vo, cloth. **6/0**

"This is the completest book of its class we have seen, and one which every amateur farmer will read with pleasure, and accept as a guide."—*Field.*

OUTLINES OF MODERN FARMING.

By R. SCOTT BURN. Soils, Manures, and Crops—Farming and Farming Economy—Cattle, Sheep, and Horses—Management of Dairy, Pigs, and Poultry—Utilisation of Town-Sewage, Irrigation, &c. Sixth Edition. In One Vol., 1,250 pp., half-bound, profusely Illustrated **12/0**

FARM ENGINEERING, The COMPLETE TEXT-BOOK of.

Comprising Draining and Embanking; Irrigation and Water Supply; Farm Roads, Fences and Gates; Farm Buildings; Barn Implements and Machines; Field Implements and Machines; Agricultural Surveying, &c. By Professor JOHN SCOTT. In One Vol., 1,150 pp., half-bound, with over 600 Illustrations. **12/0**

"Written with great care, as well as with knowledge and ability. The author has done his work well; we have found him a very trustworthy guide wherever we have tested his statements. The volume will be of great value to agricultural students."—*Mark Lane Express.*

THE FIELDS OF GREAT BRITAIN.

A Text-Book of Agriculture. Adapted to the Syllabus of the Science and Art Department. For Elementary and Advanced Students. By HUGH CLEMENTS (Board of Trade). Second Edition, Revised, with Additions. 18mo, cloth **2/6**

"It is a long time since we have seen a book which has pleased us more, or which contains such a vast and useful fund of knowledge."—*Educational Times.*

TABLES and MEMORANDA for FARMERS, GRAZIERS, AGRICULTURAL STUDENTS, SURVEYORS, LAND AGENTS, AUCTIONEERS, &c.

With a New System of Farm Book-keeping. By SIDNEY FRANCIS. Fifth Edition. 272 pp., waistcoat-pocket size, limp leather **1/6**

"Weighing less than 1 oz., and occupying no more space than a match-box, it contains a mass of facts and calculations which has never before, in such handy form, been obtainable. Every operation on the farm is dealt with. The work may be taken as thoroughly accurate, the whole of the tables having been revised by Dr. Fream. We cordially recommend it."—*Bell's Weekly Messenger.*

THE ROTHAMSTED EXPERIMENTS AND THEIR PRACTICAL LESSONS FOR FARMERS.

Part I. STOCK. Part II. CROPS. By C. J. R. TIPPER. Crown 8vo, cloth. [*Just Published.* **3/6**

"We have no doubt that the book will be welcomed by a large class of farmers and others interested in agriculture."—*Standard.*

FERTILISERS AND FEEDING STUFFS.

A Handbook for the Practical Farmer. By BERNARD DYER, D.Sc. (Lond.) With the Text of the Fertilisers and Feeding Stuffs Act of 1893, &c. Third Edition, Revised. Crown 8vo, cloth. [*Just Published.* **1/0**

"This little book is precisely what it professes to be—'A Handbook for the Practical Farmer.' Dr. Dyer has done farmers good service in placing at their disposal so much useful information in so intelligible a form."—*The Times.*

BEES FOR PLEASURE AND PROFIT.

A Guide to the Manipulation of Bees, the Production of Honey, and the General Management of the Apiary. By G. GORDON SAMSON. With numerous Illustrations. Crown 8vo, cloth **1/0**

BOOK-KEEPING for FARMERS and ESTATE OWNERS.

A Practical Treatise, presenting, in Three Plans, a System adapted for all Classes of Farms. By JOHNSON M. WOODMAN, Chartered Accountant. Second Edition, Revised. Crown 8vo, cloth **2/6**

"The volume is a capital study of a most important subject."—*Agricultural Gazette.*

WOODMAN'S YEARLY FARM ACCOUNT BOOK.

Giving Weekly Labour Account and Diary, and showing the Income and Expenditure under each Department of Crops, Live Stock, Dairy, &c., &c. With Valuation, Profit and Loss Account, and Balance Sheet at the End of the Year. By JOHNSON M. WOODMAN, Chartered Accountant. Second Edition. Folio, half-bound . . . . . *Net* **7/6**

"Contains every requisite form for keeping farm accounts readily and accurately."—*Agriculture.*

THE FORCING GARDEN.

Or, How to Grow Early Fruits, Flowers and Vegetables. With Plans and Estimates for Building Glasshouses, Pits and Frames. With Illustrations. By SAMUEL WOOD. Crown 8vo, cloth **3/6**

"A good book, containing a great deal of valuable teaching."—*Gardeners' Magazine.*

A PLAIN GUIDE TO GOOD GARDENING.

Or, How to Grow Vegetables, Fruits, and Flowers. By S. WOOD. Fourth Edition, with considerable Additions, and numerous Illustrations. Crown 8vo, cloth **3/6**

"A very good book, and one to be highly recommended as a practical guide. The practical directions are excellent."—*Athenæum.*

MULTUM-IN-PARVO GARDENING.

Or, How to Make One Acre of Land produce £620 a year, by the Cultivation of Fruits and Vegetables; also, How to Grow Flowers in Three Glass Houses, so as to realise £176 per annum clear Profit. By SAMUEL WOOD, Author of "Good Gardening," &c. Sixth Edition, Crown 8vo, sewed **1/0**

"We are bound to recommend it as not only suited to the case of the amateur and gentleman's gardener, but to the market grower."—*Gardeners' Magazine.*

THE LADIES' MULTUM-IN-PARVO FLOWER GARDEN.

And Amateur's Complete Guide. By S. WOOD. Crown 8vo, cloth . **3/6**

"Full of shrewd hints and useful instructions, based on a lifetime of experience."—*Scotsman.*

POTATOES: HOW TO GROW AND SHOW THEM.

A Practical Guide to the Cultivation and General Treatment of the Potato. By J. PINK. Crown 8vo **2/0**

MARKET AND KITCHEN GARDENING.

By C. W. SHAW, late Editor of *Gardening Illustrated.* Cloth . . **3/6**

"The most valuable compendium of kitchen and market-garden work published."—*Farmer.*

AUCTIONEERING, VALUING, LAND SURVEYING, ESTATE AGENCY, &c.

INWOOD'S TABLES FOR PURCHASING ESTATES AND FOR THE VALUATION OF PROPERTIES,

Including Advowsons, Assurance Policies, Copyholds, Deferred Annuities, Freeholds, Ground Rents, Immediate Annuities, Leaseholds, Life Interests, Mortgages, Perpetuities, Renewals of Leases, Reversions, Sinking Funds, &c., &c. 26th Edition, Revised and Extended by WILLIAM SCHOOLING, F.R.A.S., with Logarithms of Natural Numbers and THOMAN'S Logarithmic Interest and Annuity Tables. 360 pp., Demy 8vo, cloth.

[*Just Published.* *Net* **8/0**

"Those interested in the purchase and sale of estates, and in the adjustment of compensation cases, as well as in transactions in annuities, life insurances, &c., will find the present edition of eminent service."—*Engineering.*

"This valuable book has been considerably enlarged and improved by the labours of Mr. Schooling, and is now very complete indeed."—*Economist.*

"Altogether this edition will prove of extreme value to many classes of professional men in saving them many long and tedious calculations."—*Investors' Review.*

THE APPRAISER, AUCTIONEER, BROKER, HOUSE AND ESTATE AGENT AND VALUER'S POCKET ASSISTANT.

For the Valuation for Purchase, Sale, or Renewal of Leases, Annuities, and Reversions, and of Property generally; with Prices for Inventories, &c. By JOHN WHEELER, Valuer, &c. Sixth Edition, Re-written and greatly Extended by C. NORRIS, Surveyor, Valuer, &c. Royal 32mo, cloth . . . **5/0**

"A neat and concise book of reference, containing an admirable and clearly-arranged list of prices for inventories, and a very practical guide to determine the value of furniture, &c."—*Standard.*

"Contains a large quantity of varied and useful information as to the valuation for purchase, sale, or renewal of leases, annuities and reversions, and of property generally, with prices for inventories, and a guide to determine the value of interior fittings and other effects."—*Builder.*

AUCTIONEERS: THEIR DUTIES AND LIABILITIES.

A Manual of Instruction and Counsel for the Young Auctioneer. By ROBERT SQUIBBS, Auctioneer. Second Edition, Revised and partly Re-written. Demy 8vo, cloth **12/6**

"The standard text-book on the topics of which it treats."—*Athenæum.*

"The work is one of general excellent character, and gives much information in a compendious and satisfactory form."—*Builder.*

"May be recommended as giving a great deal of information on the law relating to auctioneers, in a very readable form."—*Law Journal.*

"Auctioneers may be congratulated on having so pleasing a writer to minister to their special needs."—*Solicitors' Journal.*

THE AGRICULTURAL VALUER'S ASSISTANT.

A Practical Handbook on the Valuation of Landed Estates; including Example of a Detailed Report on Management and Realisation; Forms of Valuations of Tenant Right; Lists of Local Agricultural Customs; Scales of Compensation under the Agricultural Holdings Act, and a Brief Treatise on Compensation under the Lands Clauses Acts, &c. By TOM BRIGHT, Agricultural Valuer. Author of "The Agricultural Surveyor and Estate Agent's Handbook." Fourth Edition, with Appendix containing a Digest of the Agricultural Holdings Acts, 1883 and 1900. Crown 8vo, cloth.

[*Just Published.* *Net* **6/0**

"Full of tables and examples in connection with the valuation of tenant-right, estates, labour, contents and weights of timber, and farm produce of all kinds."—*Agricultural Gazette.*

"An eminently practical handbook, full of practical tables and data of undoubted interest and value to surveyors and auctioneers in preparing valuations of all kinds."—*Farmer.*

POLE PLANTATIONS AND UNDERWOODS.

A Practical Handbook on Estimating the Cost of Forming, Renovating, Improving, and Grubbing Plantations and Underwoods, their Valuation for Purposes of Transfer, Rental, Sale or Assessment. By TOM BRIGHT. Crown 8vo, cloth **3/6**

"To valuers, foresters and agents it will be a welcome aid."—*North British Agriculturist.*

"Well calculated to assist the valuer in the discharge of his duties, and of undoubted interest and use both to surveyors and auctioneers in preparing valuations of all kinds."—*Kent Herald.*

AGRICULTURAL SURVEYOR AND ESTATE AGENT'S HANDBOOK.

Of Practical Rules, Formulæ, Tables, and Data. A Comprehensive Manual for the Use of Surveyors, Agents, Landowners, and others interested in the Equipment, the Management, or the Valuation of Landed Estates. By TOM BRIGHT, Agricultural Surveyor and Valuer, Author of "The Agricultural Valuer's Assistant," &c. With Illustrations. Fcap. 8vo, Leather.
[*Just Published. Net* **7/6**

"An exceedingly useful book, the contents of which are admirably chosen. The classes for whom the work is intended will find it convenient to have this comprehensive handbook accessible for reference."—*Live Stock Journal.*

"It is a singularly compact and well informed compendium of the facts and figures likely to be required in estate work, and is certain to prove of much service to those to whom it is addressed."—*Scotsman.*

THE LAND VALUER'S BEST ASSISTANT.

Being Tables on a very much Improved Plan, for Calculating the Value of Estates. With Tables for reducing Scotch, Irish, and Provincial Customary Acres to Statute Measure, &c. By R. HUDSON, C.E. New Edition. Royal 32mo, leather, elastic band **4/0**

"Of incalculable value to the country gentleman and professional man."—*Farmers' Journal.*

THE LAND IMPROVER'S POCKET-BOOK.

Comprising Formulæ, Tables, and Memoranda required in any Computation relating to the Permanent Improvement of Landed Property. By JOHN EWART, Surveyor. Second Edition, Revised. Royal 32mo, oblong, leather . **4/0**

"A compendious and handy little volume."—*Spectator.*

THE LAND VALUER'S COMPLETE POCKET-BOOK.

Being the above Two Works bound together. Leather **7/6**

HANDBOOK OF HOUSE PROPERTY.

A Popular and Practical Guide to the Purchase, Mortgage, Tenancy, and Compulsory Sale of Houses and Land, including Dilapidations and Fixtures: with Examples of all kinds of Valuations, Information on Building and on the right use of Decorative Art. By E. L. TARBUCK, Architect and Surveyor. Sixth Edition. 12mo, cloth **5/0**

"The advice is thoroughly practical."—*Law Journal.*

"For all who have dealings with house property, this is an indispensable guide."—*Decoration.*

"Carefully brought up to date, and much improved by the addition of a division on Fine Art. A well-written and thoughtful work."—*Land Agent's Record.*

LAW AND MISCELLANEOUS.

MODERN JOURNALISM.

A Handbook of Instruction and Counsel for the Young Journalist. By JOHN B. MACKIE, Fellow of the Institute of Journalists. Crown 8vo, cloth . **2/0**

"This invaluable guide to journalism is a work which all aspirants to a journalistic career will read with advantage."—*Journalist.*

HANDBOOK FOR SOLICITORS AND ENGINEERS

Engaged in Promoting Private Acts of Parliament and Provisional Orders for the Authorisation of Railways, Tramways, Gas and Water Works, &c. By L. LIVINGSTONE MACASSEY, of the Middle Temple, Barrister-at-Law, M. Inst. C.E. 8vo, cloth . . . . . **£1 5s.**

PATENTS for INVENTIONS, HOW to PROCURE THEM.

Compiled for the Use of Inventors, Patentees and others. By G. G. M. HARDINGHAM, Assoc. Mem. Inst. C.E., &c. Demy 8vo, cloth . . **1/6**

CONCILIATION & ARBITRATION in LABOUR DISPUTES.

A Historical Sketch and Brief Statement of the Present Position of the Question at Home and Abroad. By J. S. JEANS, Author of "England's Supremacy," &c. Crown 8vo, 200 pp., cloth **2/6**

EVERY MAN'S OWN LAWYER.

A Handy-Book of the Principles of Law and Equity. With a Concise Dictionary of Legal Terms. By A BARRISTER. Thirty-eighth Edition, carefully Revised, and including New Acts of Parliament of 1900. Comprising the *Companies Act, 1900;* the *Money-Lenders Act, 1900;* the *Agricultural Holdings Act, 1900;* the *Workmen's Compensation Act, 1900;* the *Wild Animals in Captivity Protection Act, 1900;* the *Finance Act, 1900,* and other enactments of the year. *Judicial Decisions during the year have also been duly noted.* Crown 8vo, 750 pp., strongly bound in cloth.

[Just Published. **6/8**

*** *This Standard Work of Reference forms* A COMPLETE EPITOME OF THE LAWS OF ENGLAND, *comprising (amongst other matter):*

THE RIGHTS AND WRONGS OF INDIVIDUALS—LANDLORD AND TENANT—VENDORS AND PURCHASERS—LEASES AND MORTGAGES—PRINCIPAL AND AGENT—PARTNERSHIP AND COMPANIES—MASTERS, SERVANTS AND WORKMEN—CONTRACTS AND AGREEMENTS—BORROWERS, LENDERS AND SURETIES—SALE AND PURCHASE OF GOODS—CHEQUES, BILLS AND NOTES—BILLS OF SALE—BANKRUPTCY—RAILWAY AND SHIPPING LAW—LIFE, FIRE, AND MARINE INSURANCE—ACCIDENT AND FIDELITY INSURANCE—CRIMINAL LAW—PARLIAMENTARY ELECTIONS—COUNTY COUNCILS—DISTRICT COUNCILS—PARISH COUNCILS—MUNICIPAL CORPORATIONS—LIBEL AND SLANDER—PUBLIC HEALTH AND NUISANCES—COPYRIGHT, PATENTS, TRADE MARKS—HUSBAND AND WIFE—DIVORCE—INFANCY—CUSTODY OF CHILDREN—TRUSTEES AND EXECUTORS—CLERGY, CHURCHWARDENS, &C.—GAME LAWS AND SPORTING—INNKEEPERS—HORSES AND DOGS—TAXES AND DEATH DUTIES—FORMS OF AGREEMENTS, WILLS, CODICILS, NOTICES, &C.

☞ *The object of this work is to enable those who consult it to help themselves to the law; and thereby to dispense, as far as possible, with professional assistance and advice. There are many wrongs and grievances which persons submit to from time to time through not knowing how or where to apply for redress; and many persons have as great a dread of a lawyer's office as of a lion's den. With this book at hand it is believed that many a* SIX-AND-EIGHTPENCE *may be saved; many a wrong redressed; many a right reclaimed; many a law suit avoided; and many an evil abated. The work has established itself as the standard legal adviser of all classes, and has also made a reputation for itself as a useful book of reference for lawyers residing at a distance from law libraries, who are glad to have at hand a work embodying recent decisions and enactments.*

OPINIONS OF THE PRESS.

"It is a complete code of English Law written in plain language, which all can understand. . . . Should be in the hands of every business man, and all who wish to abolish lawyers bills."—*Weekly Times.*

"A useful and concise epitome of the law, compiled with considerable care."—*Law Magazine.*

"A complete digest of the most useful facts which constitute English law."—*Globe.*

"This excellent handbook. . . . Admirably done, admirably arranged, and admirably cheap."—*Leeds Mercury*

"A concise, cheap, and complete epitome of the English law. So plainly written that he who runs may read, and he who reads may understand."—*Figaro.*

"A dictionary of legal facts well put together. The book is a very useful one."—*Spectator.*

THE PAWNBROKER'S, FACTOR'S, AND MERCHANT'S GUIDE TO THE LAW OF LOANS AND PLEDGES.

With the Statutes and a Digest of Cases. By H. C. FOLKARD, Barrister-at-Law. Cloth **3/6**

LABOUR CONTRACTS.

A Popular Handbook on the Law of Contracts for Works and Services. By DAVID GIBBONS. Fourth Edition, with Appendix of Statutes by T. F. UTTLEY, Solicitor. Fcap. 8vo, cloth **3/6**

SUMMARY OF THE FACTORY AND WORKSHOP ACTS

(1878-1891). For the Use of Manufacturers and Managers. By EMILE GARCKE and J. M. FELLS. (Reprinted from "FACTORY ACCOUNTS.") Crown 8vo, sewed . . . . . **6D.**

BRADBURY, AGNEW, & CO. LD., PRINTERS, LONDON AND TONBRIDGE.

WEALE'S SCIENTIFIC & TECHNICAL SERIES.

MATHEMATICS, ARITHMETIC, &c.

Geometry, Descriptive. J. F. HEATHER	2/-
Practical Plane Geometry. J. F. HEATHER	2/-
Analytical Geometry. J. HANN & J. R. YOUNG	2/-
Geometry. Part I. (Euclid, Bks. I.—III.) H. LAW	1/6
Part II. (Euclid, Books IV., V., VI., XI., XII.). H. LAW	1/6
Geometry, in 1 vol. (Euclid's Elements)	2/6
Plane Trigonometry. J. HANN	1/6
Spherical Trigonometry. J. HANN	1/-
The above 2 vols., bound together	2/6
Differential Calculus. W. S. B. WOOLHOUSE	1/6
Integral Calculus. H. COX	1/6
Integral Calculus. J. HANN	1/-
Algebra. J. HADDON	2/-
Key to ditto	1/6
Book-keeping. J. HADDON	1/6
Arithmetic. J. R. YOUNG	1/6
Key to ditto	1/6
Equational Arithmetic. W. HIPSLEY	1/6
Arithmetic. J. HADDON	1/6
Key to ditto	1/6
Mathematical Instruments. HEATHER & WALMISLEY	2/-
Drawing & Measuring Instruments. J. F. HEATHER	1/6
Optical Instruments. J. F. HEATHER	1/6
Surveying & Astronomical Instruments. J. F. HEATHER	1/6
The above 3 vols., bound together	4/6
Mensuration and Measuring. T. BAKER	1/6
Slide Rule, & How to Use it. C. HOARE	2/6
Measures, Weights, & Moneys. W. S. B. WOOLHOUSE	2/6
Logarithms, Treatise on, with Tables. H. LAW	3/-
Compound Interest and Annuities. F. THOMAN	4/-
Compendious Calculator. D. O'GORMAN	2/6
Mathematics. F. CAMPIN	3/-
Astronomy. R. MAIN & W. T. LYNN	2/-
Statics and Dynamics. T. BAKER	1/6

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, E.C.

b89083916247 r be kept.

b89083916247a

& TECHNICAL SERIES.

ARCHITECTURE.

...LAND	2/-
Science of Building. E. W. TARN	3/6
Building, Art of. E. DOBSON	2/-
Book on Building. Sir E. BECKETT	4/6
Dwelling Houses, Erection of. S. H. BROOKS	2/6
Cottage Building. C. B. ALLEN	2/-
Acoustics of Public Buildings. Prof. T. R. SMITH	1/6
Practical Bricklaying. A. HAMMOND	1/6
Practical Brick Cutting & Setting. A. HAMMOND	1/6
Brickwork. F. WALKER	1/6
Brick and Tile Making. E. DOBSON	3/-
Practical Brick & Tile Book. DOBSON & HAMMOND	6/-
Carpentry and Joinery. T. TREDGOLD & E. W. TARN	3/6
Atlas of 35 plates to the above	6/-
Handrailing and Staircasing. G. COLLINGS	2/6
Circular Work in Carpentry. G. COLLINGS	2/6
Roof Carpentry. G. COLLINGS	2/-
Construction of Roofs. E. W. TARN	1/6
Joints used by Builders. J. W. CHRISTY	3/-
Shoring. G. H. BLAGROVE	1/6
Timber Importer's & Builder's Guide. R. E. GRANDY	2/-
Plumbing. W. P. BUCHAN	3/6
Ventilation of Buildings. W. P. BUCHAN	3/6
Practical Plasterer. W. KEMP	2/-
House-Painting. E. A. DAVIDSON	5/-
Elementary Decoration. J. W. FACEY	2/-
Practical House Decoration. J. W. FACEY	2/6
Gas-Fitting. J. BLACK	2/6
Portland Cement for Users. H. FAIJA	2/-
Limes, Cements, & Mortars. G. R. BURNELL	1/6
Masonry and Stone Cutting. E. DOBSON	2/6
Arches, Piers, and Buttresses. W. BLAND	1/6
Quantities and Measurements. A. C. BEATON	1/6
Complete Measurer. R. HORTON	4/-
Light, for use of Architects. E. W. TARN	1/6
Hints to Young Architects. WIGHTWICK & GUILLAUME	3/6
Dictionary of Architectural Terms. J. WEALE	5/-

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, E.C.

Letter-Painting Made Easy. J. G. Badenoch . . 1/6
Boot and Shoemaking. J. B. Leno 2/-
Mechanical Dentistry. C. Hunter 3/-
Wood Engraving. W. N. Brown 1/6
Laundry [illegible] 2/-

CROSBY L[illegible] [illegible]mers' Hall Court, E.C.